YOU DESERVE

ARANI™

GREAT SERVICE

# LED LIGHTING CATALOG

WINTER 2022

2555 Leger Street, LaSalle, QC H8N 2V9, Canada
#4-801 30th Street NE, Calgary, AB T2A 5L7, Canada
Toll Free: (888) 992-7264 | arani.ca

# COLOR TEMPERATURE REFERENCE

| 2200K | 2500K | 2700K | 3000K | 3500K | 4000/4100K | 5000K | 6500K |
|---|---|---|---|---|---|---|---|
| Amber White | Sunrise/Sunset White | Soft White | Warm White | Neutral White | Cool White | Daylight | Daylight |

10 YEARS IN LED LIGHTING

# The ARANI Family

Founded in 2009, the Arani family celebrated the company's 10th anniversary in 2019!
We are thankful to everyone's continued support and look forward to many more anniversaries to come.

RESIDENTIAL

COMMERCIAL

INDUSTRIAL

# OUR LED PRODUCTS

**GET YOUR PRODUCTS FAST**
Arani is committed to same day shipping on orders placed before 3pm*.

TUNABLE WHITE
LED SLIM PANELS 11

TUNABLE WHITE
LED GIMBAL
POT LIGHTS 14



DECORATIVE
LED UP & DOWN LIGHT 19

UP & DOWN
LED LINEAR LIGHT 21

ALTUM
LED LINEAR LIGHT 22

TUNABLE WHITE
LED LINEAR STRIP
LIGHT FIXTURE 25

INDOOR/
WEATHERPROOF
LED STRIPS & EXTRUSIONS 29

LUNAR
SIGNATURE
RECESSED EXTRUSION 37

DOT-FREE
FLEXITUBE 39

DRIVERLESS
120V LED STRIP 41

SIGN LIGHTING
LED MODULES 43

ALL-IN-ONE &
REMOTE-CONTROLLED
LED PANELS 45


*Applies for products in the catalog with this icon only. For latest stock information, please consult arani.ca.

LED
EMERGENCY LIGHTING 49

MINI
LED FLOOD LIGHTS 55



HYBRID
LED SHOEBOX
FLOOD LIGHT 57

SLIM PROFILE
LED CANOPY LIGHT 63

LED
VAPOR TIGHT
FIXTURE 65

SIGNATURE
LED WALL PACKS
WP2, WP10, WP11 67

LED
HIGH BAYS 71

T8
LED TUBES 75

SIGNATURE
LED LAMPS
PAR16, PAR30-SN, PAR38 77

SIGNATURE
LED LAMPS
G4, G9, MR11, MR16, A19 78

LED
ACCESSORIES
TRANSFORMERS 81

LED
ACCESSORIES
STEP DOWN TRANSFORMERS 84

LED
ACCESSORIES
RGB CONTROLLER,
RGB AMPLIFIER 85

# THE COMPANY

Headquartered in Montreal, Canada since 2009, Arani has been in the LED business since LEDs first became commercially viable, supplying LED lighting products across Canada and the United States. Arani offers same day shipping on all orders placed before 3pm.

In June 2019, the Arani family celebrated its 10th anniversary, and as of 2017, Arani has been recognized as one of the fastest growing companies in Quebec and Canada by PROFIT500 and GROWTH500. Beyond supplying high quality LED products that come with a 5 year hassle-free warranty, Arani is committed to first-class customer service, simplifying the lives of thousands of lighting industry professionals.

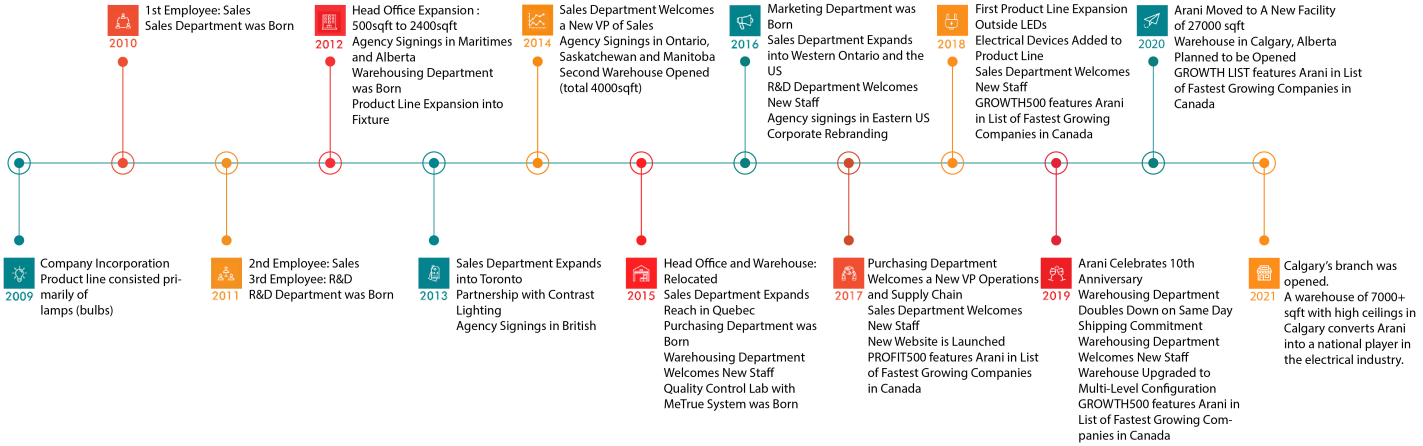

# QUALITY CONTROL

Every shipment of LED products undergoes 27 steps of quality control before entering the market, including but not limited to:

- Ensuring the precision of CRI, CCT, R9 values, lumen output, and power consumption.
- Verifying the ease of installation, length of the power cord, and presence of relevant mounting accessories
- Measuring the temperature of the junction box after leaving the luminaires on for an extended period of time
- Testing the compatibility of the luminaires with various dimmers to prevent flickering
- Inspecting the assembly and physical condition of the product

The AraniLab houses one of the largest MeTrue Spectro Radiometer and Integrating Spheres in Canada, spanning a full 2 meters in diameter, allowing Arani to conduct more extensive quality control tests than most other manufacturers. To use of the AraniLab, please contact us.

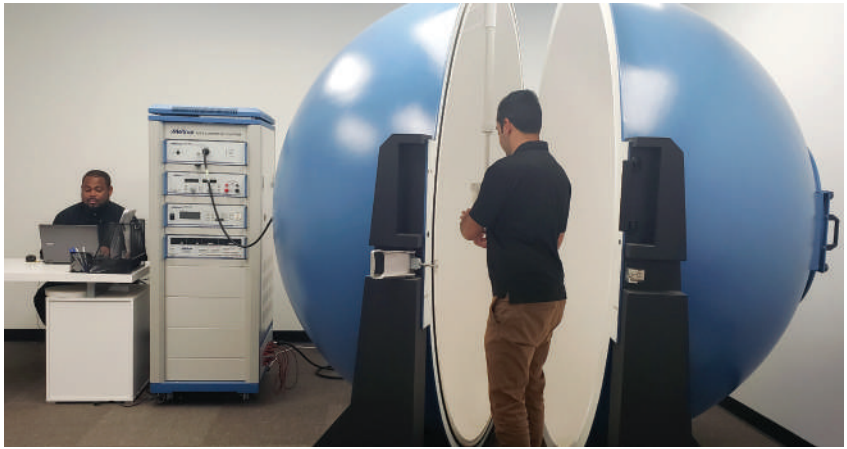

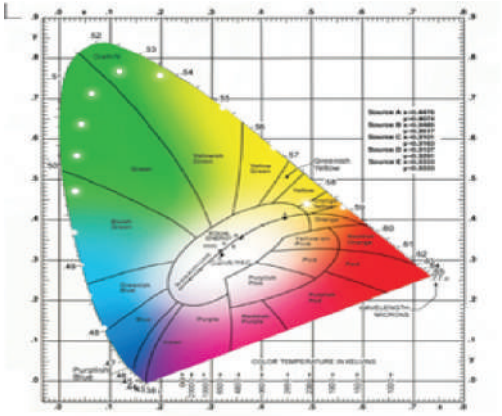

# PAST PROJECTS

Arani has designed, consulted on, and supplied thousands of projects across Canada and the United States. Some of the most notable past projects include: the G7 Summit (2019), Crowne Plaza Hotel, ULTRAMAR (300+ Locations), Molson, Groupe Canam (Canada and United States), Rio Tinto, City of Acton Vale and 9 other municipalities, among many others. Arani is an official supplier to Canadian municipalities such as the City of Montreal, and major construction/property management companies such as BGIS. It would be our pleasure to supply your next project.


Crowne Plaza Hotel (Montreal)

G7 Summit (La Malbaie)

Blackbay Farm

Transportation Warehouse (Quebec)

HPadar Tailor

Emery Centre Jardin (Gatineau)

Curling Rink (Manitoba)

Residential Project (Montreal)

# SEE YOUR PROJECT COME TO LIFE

Arani offers full project simulation services on all Arani products for your lighting needs. Simply provide project specifications to receive product and installation recommendations, and a full project report, free of charge!

---

Use our service to:

1. Determine the right products for your project
2. Determine the perfect placement of your luminaires
3. Show your customers the lighting blueprint

ALL BEFORE YOU INSTALL THE PRODUCTS AT THE JOB SITE!

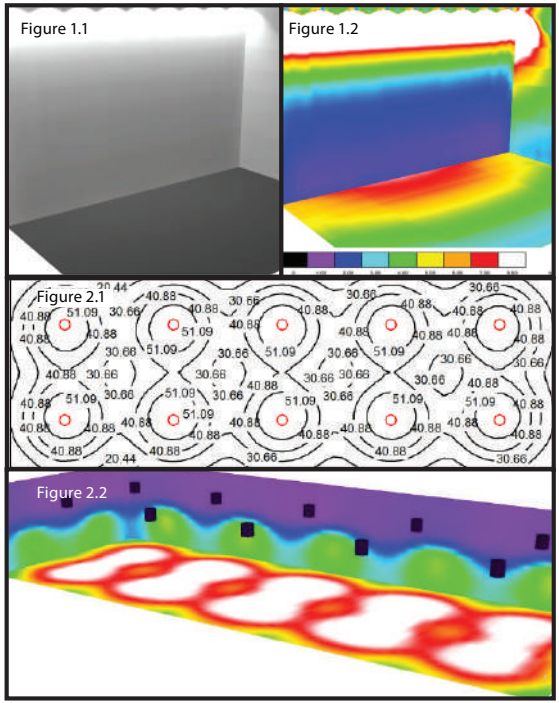


Fig 1: Simulation of Arani Floodlights in a Theatre
1.1: 3D Rendering
1.2: False Color Rendering
Fig 2: Simulation of Arani Highbays in a Warehouse
2.1: Lighting Summary
2.2: False Color Rendering

# LED DRIVERS REPLACEMENT

Arani offers driver replacements for all LED fixtures, whether they were bought from us or not!

OUR 3 STEP SERVICE

1) Take a clear photo of the driver on the burnt out fixture (any manufacturer)
2) Send the photo of the driver to us
3) Purchase and receive the recommended replacement driver

Arani will offer you one of the many replacement drivers we have in stock. Contact us today!

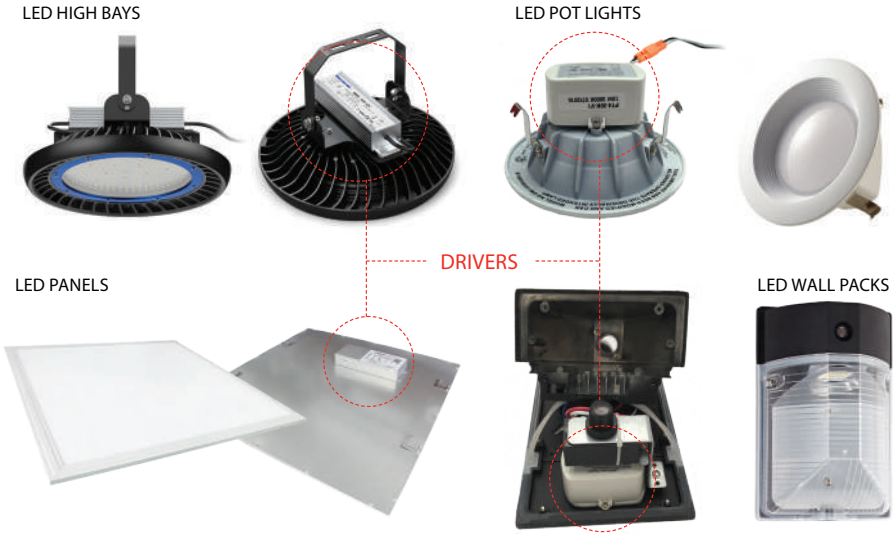

# MADE & ASSEMBLED IN CANADA

Simplifying the lives of our customers is our priority. Arani offers custom LED strips and aluminum extrusions, cut to length in our workshop in Montreal, Canada and shipped to the job site ready to plug-and-play. Made from 100% Canadian-sourced aluminum, designed by Canadian engineers, and cut and assembled by Canadian workers, right here in Canada.

Whether you already have a schematic for us to follow, or only have a rough idea of what your project will need, we welcome you to share your project with us. Our team of engineers and lighting specialists would be more than happy to take care of you!

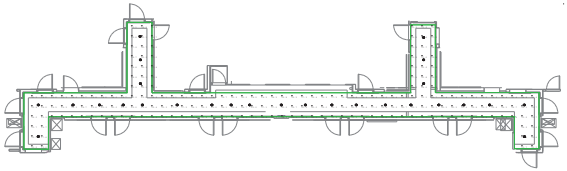

# TUNABLE WHITE LED POT LIGHTS

## VERSION 2

# TUNABLE WHITE LED SLIM PANEL/WAFER LIGHT

5 Years

Lifetime
35 000 hours

IP44
Suitable for use in damp locations

3000K
5000K
4000K
Toggle Switch
CCT Variable

Triac
Dimmable

4" Slim Panel (Brushed Nickel)
SL4-VAR-R-BN-V2

4" Slim Panel (Black)
SL4-VAR-R-BK-V2

FEATURES
Robust Aluminium Casing & Trim (Not Plastic)
Exceptionally Slim Profile
High Quality Mounting Springs
Input Voltage: 120VAC
Color Rendering Index: >80
Operating Temperature: -20°C to 40°C
Easily adjust colour temperature with toggle switch

| SERIES | CASE PACK QTY | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | COLOR TEMP | TRIM COLOR | MODEL NUMBER |
|---|---|---|---|---|---|---|---|
| 4" TUNABLE WHITE (TOGGLE SWITCH) SLIM PANEL | 40 | 10W | 60W | 3000K: 589<br>4000K: 704<br>5000K: 673 | CCT VARIABLE<br>3000K<br>4000K<br>5000K | WHITE | SL4-VAR-R-WH-V2 |
| | | | | | | BRUSHED NICKEL | SL4-VAR-R-BN-V2 |
| | | | | | | BLACK | SL4-VAR-R-BK-V2 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# TUNABLE WHITE LED SLIM PANEL/WAFER LIGHT

6" Slim Panel (White)
SL6-VAR-R-WH-V2

6" Slim Panel (Brushed Nickel)
SL6-VAR-R-BN-V2

6" Slim Panel (Black)
SL6-VAR-R-BK-V2

5 Years

Lifetime
35 000 hours

IP44
Suitable for use in damp locations

3000K
5000K
4000K
Toggle Switch
CCT Variable

Triac
Dimmable

FEATURES
Robust Aluminium Casing & Trim (Not Plastic)
Exceptionally Slim Profile
High Quality Mounting Springs
Input Voltage: 110-130VAC
Color Rendering Index: >80
Operating Temperature: -20°C to 40°C
Easily adjust colour temperature with toggle switch

| SERIES | CASE PACK QTY | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | COLOR TEMP | TRIM COLOR | MODEL NUMBER |
|---|---|---|---|---|---|---|---|
| 6" TUNABLE WHITE (TOGGLE SWITCH) SLIM PANEL | 30 | 15W | 100W | 3000K: 950<br>4000K: 1050<br>5000K: 980 | CCT VARIABLE<br>3000K<br>4000K<br>5000K | WHITE | SL6-VAR-R-WH-V2 |
| | | | | | | BRUSHED NICKEL | SL6-VAR-R-BN-V2 |
| | | | | | | BLACK | SL6-VAR-R-BK-V2 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# MOUNTING PLATES FOR LED SLIM PANEL/LED GIMBAL POT LIGHT




3" Mounting Plate
SL3-MP-R-V2




4" Mounting Plate
SL4-MP-R-V2

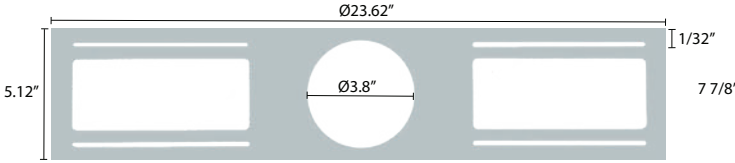


4" Mounting Plate (Long)
SL4-MP-R-L-V2

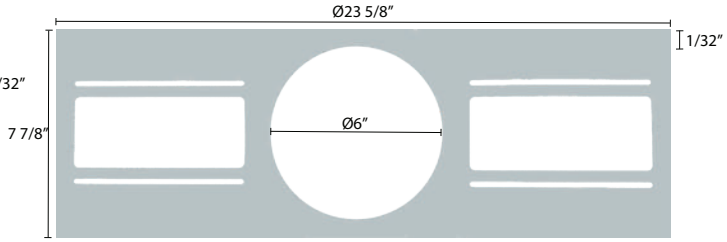


6" Mounting Plate
SL6-MP-R-V2

FEATURES
Steel
Easy to Install with Room for Adjustment

| SERIES | COMPATIBLE WITH | CASE PACK QTY | MODEL NUMBER |
|---|---|---|---|
| 3" MOUNTING PLATE | 3" LED GIMBAL POT LIGHT V3 | 200 | SL3-MP-R-V2 |
| 4" MOUNTING PLATE | 4" LED SLIM PANEL V3 / 4" LED GIMBAL POT LIGHT V3 | 200 | SL4-MP-R-V2 |
| 4" MOUNTING PLATE (LONG) | 4" LED SLIM PANEL V3 / 4" LED GIMBAL POT LIGHT V3 | 50 | SL4-MP-R-L-V2 |
| 6" MOUNTING PLATE | 6" LED SLIM PANEL V3 | 50 | SL6-MP-R-V2 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# TUNABLE WHITE GIMBAL SLIM LED POT LIGHT

Side View
Recommended minimum ceiling clearance: 2.5"

Gimbal Engine (White)
SLG-VAR-R-WH-V2

Gimbal Engine (Brushed Nickel)
SLG-VAR-R-BN-V2

Gimbal Engine (Black)
SLG-VAR-R-BK-V2

5 Years

Lifetime
35 000 hours

IP54
Suitable for use in damp locations

3000K
5000K
4000K
Toggle Switch
CCT Variable

Triac
Dimmable

FEATURES
Adjustable Gimbal Head (8/12 Pitch = ~35°)
Robust Aluminum Body
High Quality Mounting Springs
Input Voltage: 120VAC
Color Rendering Index: >80
Operating Temperature: -20°C to 40°C
Trim Required and Sold Separately

| SERIES | CASE PACK QTY | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | COLOR TEMP | FINISH | MODEL NUMBER |
|---|---|---|---|---|---|---|---|
| TUNABLE WHITE GIMBAL SLIM POT LIGHT ENGINE | 40 | 8W | 60W INCANDESCENT | 3000K: 696<br>4000K: 784<br>5000K: 708 | VARIABLE<br>3000K<br>4000K<br>5000K | WHITE | SLG-VAR-R-WH-V2 |
| | | | | | | BRUSHED NICKEL | SLG-VAR-R-BN-V2 |
| | | | | | | BLACK | SLG-VAR-R-BK-V2 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# ROUND TRIMS FOR GIMBAL SLIM LED POT LIGHT

3" Gimbal Trim (White)
with White Gimbal Engine
SL3G-TR-WH-V2 + SLG-VAR-R-WH-V2

3" Gimbal Trim (Brushed Nickel)
with Brushed Nickel Gimbal Engine
SL3G-TR-BN-V2 + SLG-VAR-R-BN-V2

4" Gimbal Trim (Black)
with Black Gimbal Engine
SL4G-TR-BK-V2 + SLG-VAR-R-BK-V2

FEATURES
Easy Installation (Insert & Twist)
Robust Aluminum Trim
Requires Gimbal Pot Light Engine (See Page 14)

| SERIES | SHAPE | OPENING SIZE | DIMENSIONS | CASE PACK QTY | TRIM COLOR | MODEL NUMBER |
|---|---|---|---|---|---|---|
| 3" GIMBAL SLIM POT LIGHT TRIM | ROUND | Ø 2 3/4" | Ø 3 1/2" | 100 | WHITE | SL3G-TR-WH-V2 |
| | | | | | BRUSHED NICKEL | SL3G-TR-BN-V2 |
| | | | | | BLACK | SL3G-TR-BK-V2 |
| 4" GIMBAL SLIM POT LIGHT TRIM | ROUND | Ø 2 3/4" | Ø 4 3/4" | 120 | WHITE | SL4G-TR-WH-V2 |
| | | | | | BRUSHED NICKEL | SL4G-TR-BN-V2 |
| | | | | | BLACK | SL4G-TR-BK-V2 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# SQUARE TRIMS FOR GIMBAL SLIM LED POT LIGHT(GIMBAL)

FEATURES
Easy Installation (Insert & Twist)
Robust Aluminum Trim

Requires Gimbal Pot Light Engine (See Page 14)

3" Gimbal Trim (White)
with White Gimbal Engine
SL3G-TS-WH-V2 + SLG-VAR-R-WH-V2

3" Gimbal Trim (Black)
with Black Gimbal Engine
SL3G-TS-BK-V2 + SLG-VAR-R-BK-V2

3" Gimbal Trim (Brushed Nickel)
with White Gimbal Engine
SL3G-TS-BN-V2 + SLG-VAR-R-BN-V2

| SERIES | SHAPE | OPENING SIZE | DIMENSIONS | CASE PACK QTY | TRIM COLOR | MODEL NUMBER |
|---|---|---|---|---|---|---|
| 3" GIMBAL SLIM POT LIGHT TRIM | SQUARE | 2 3/4" | 3 1/4" | 100 | WHITE | SL3G-TS-WH-V2 |
| | | | | | BRUSHED NICKEL | SL3G-TS-BN-V2 |
| | | | | | BLACK | SL3G-TS-BK-V2 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# ROUND TRIMS FOR GIMBAL SLIM LED POT LIGHT



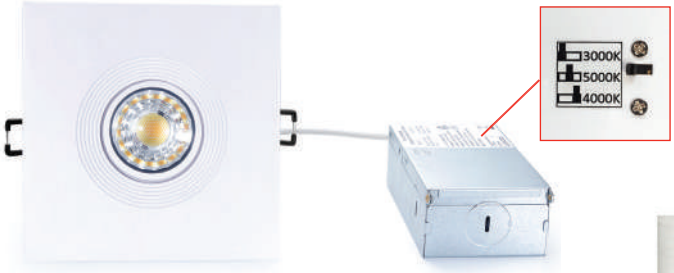


4" Gimbal Trim (White)
with White Gimbal Engine
SL4G-TS-WH-V2 + SLG-VAR-R-WH-V2

FEATURES
Easy Installation (Insert & Twist)
Robust Aluminum Trim
Requires Gimbal Pot Light Engine (See Page 14)

4" Gimbal Trim (Black)
with Black Gimbal Engine
SL4G-TS-BK-V2 + SLG-VAR-R-BK-V2

4" Gimbal Trim
(Brushed Nickel) with
Brushed Nickel Gimbal Engine
SL4G-TS-BN-V2 + SLG-VAR-R-BN-V2

| SERIES | SHAPE | OPENING SIZE | DIMENSIONS | CASE PACK QTY | TRIM COLOR | MODEL NUMBER |
|---|---|---|---|---|---|---|
| 4" GIMBAL SLIM POT LIGHT TRIM | SQUARE | 2 3/4" | 4 5/8" | 120 | WHITE | SL4G-TS-WH-V2 |
| | | | | | BRUSHED NICKEL | SL4G-TS-BN-V2 |
| | | | | | BLACK | SL4G-TS-BK-V2 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# LED UP & DOWN WALL SCONCE
## VERSION 2

# DECORATIVE LED UP & DOWN LIGHT

Up & Down Light (3.5″)
UD-RD-20W-xxK-V2

Up & Down Light (6″)
UD-RD-50W-xxK-V2




3.5″ Decorative Down Light
WL-DL-RD-10W-xxK-V2

6″ Decorative Down Light
WL-DL-RD-25W-xxK-V2

5 Years

Lifetime
50 000 hours

IP65
Suitable for use in wet locations

## FEATURES

Robust Aluminium Casing (Black)
Color Rendering Index: >80
Operating Temperature: -40°C to 50°C
Input Voltage: 100 - 277VAC

| SERIES | DIAMETER | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | CASE PACK QTY | COLOR TEMP | MODEL NUMBER |
|---|---|---|---|---|---|---|---|
| UP & DOWN LIGHT V2 | 3.5″ | 2 X 10 | 50W | 2 x 900 | 10 | 3000K | UD-RD-20W-30K-V2 |
| | | | | | | 4000K | UD-RD-20W-40K-V2 |
| | 6″ | 2 X 25 | 120W | 2 x 2250 | 9 | 4000K | UD-RD-50W-40K-V2 |
| | | | | | | 5000K | UD-RD-50W-50K-V2 |
| DECORATIVE DOWN LIGHT V2 | 3.5″ | 10 | 25W | 900 | 16 | 3000K | WL-DL-RD-10W-30K-V2 |
| | | | | | | 4000K | WL-DL-RD-10W-40K-V2 |
| | 6″ | 25 | 60W | 2250 | 9 | 4000K | WL-DL-RD-25W-40K-V2 |
| | | | | | | 5000K | WL-DL-RD-25W-50K-V2 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# LED LINEAR LIGHTING

# SIGNATURE LED LINEAR LIGHT

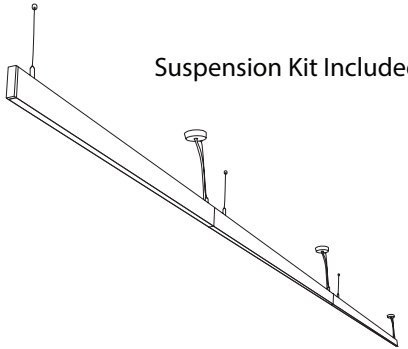

Suspension Kit Included

Linear Up & Down Light
SU-UD4-40W-xxK-S-V1
Seamless Interconnection Possible
with Included Accessories

5 Years

Lifetime
50 000 hours

IP40
Suitable for use in damp locations

0-10V
Dimmable

FEATURES
Robust Aluminium Casing
Exceptionally Slim Profile
Color Rendering Index: >83
Input Voltage: 110-260V
Operating Temperature: 0°C to 40°C
Suspension Mount

| SERIES | CASE PACK QTY | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | COLOR TEMPERATURE | MODEL NUMBER |
|---|---|---|---|---|---|---|
| LINEAR UP & DOWN LIGHT V2 | 6 | 40 | 2 x 32W T8 FLUORESCENT | Up (25%): 818<br>Down (75%): 2453 | 3000K | SU-UD4-40W-30K-S-V1 |
| | | | | | 4000K | SU-UD4-40W-40K-S-V1 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# ALTUM LED LINEAR LIGHT



Surface-Mount Kit Included

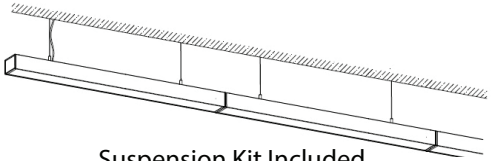

Suspension Kit Included

5 Years

Lifetime
50 000 hours

IP40
Suitable for use in damp locations

0-10V
Dimmable

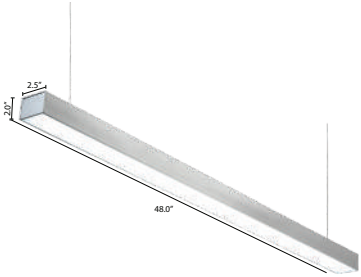


Altum (Silver)
SU-AL-xxK

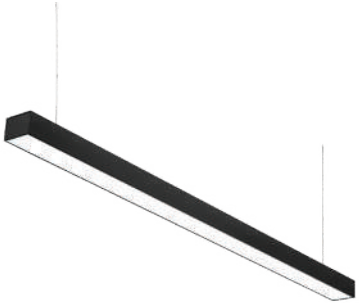

Altum (Black)
SU-AL-40K-BK

## FEATURES

Interconnected Installation Possible (Accessories Included)
Robust Aluminium Casing
Exceptionally Slim Profile
Beam Angle: 120°
Color Rendering Index: >83
Input Voltage: 110-260V
Operating Temperature: 0°C to 40°C
Surface-Mount / Suspension Mount

| SERIES | CASE PACK QTY | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | FINISH | COLOR TEMPERATURE | MODEL NUMBER |
|---|---|---|---|---|---|---|---|
| ALTUM LINEAR LIGHT | 4 | 40 | 2 x 32W T8 FLUORESCENT | 3200 | SILVER | 3000K | SU-AL-30K |
| | | | | | | 4000K | SU-AL-40K |
| | | | | | BLACK | 4000K | SU-AL-40K-BK |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# ALTUM LED LINEAR LIGHT





X Connector for
Altum Linear Light
C-SU-AL-40K-X

L Connector for
Altum Linear Light
C-SU-AL-40K-L

5 Years

Lifetime
50 000 hours

0-10V
Dimmable

IP40
Suitable for use in damp locations

FEATURES

Low Voltage
Robust Aluminium Casing
Exceptionally Slim Profile
Beam Angle: 120°
Color Rendering Index: >83
Operating Temperature: 0°C to 40°C

| SERIES | SHAPE | APPLICATION | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | COLOR TEMPERATURE | MODEL NUMBER |
|---|---|---|---|---|---|---|---|
| CONNECTORS FOR ALTUM LINEAR LIGHT | X | CONNECTING 4 LUMINAIRES TO FORM AN X OR + | 6 | 25W INCANDESCENT | 500 | 4000K | C-SU-AL-40K-X |
| | L | CONNECTING 2 LUMINAIRES TO FORM A CORNER | 10 | 25W INCANDESCENT | 400 | 4000K | C-SU-AL-40K-L |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# TUNABLE WHITE LED LINEAR STRIP LIGHT

# 2FT TUNABLE WHITE LED LINEAR STRIP LIGHT

2ft Tunable White
LED Linear Strip Light
LS24-20W-VAR-V1-120V

Included Accessory for Covering Junction Box

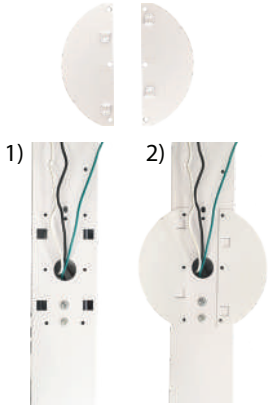


GUARANTEE
5 Years

Lifetime
50 000 hours

IP54
Suitable for use in damp locations

0-10V
Dimmable

CERTIFIED

3500K
4000K
5000K
Toggle Switch
CCT Variable

FEATURES
Knockouts on Both Sides and Back
Suitable for Chain-Mounting in a Row
Robust Casing
Color Rendering Index: >80
Operating Temperature: -10°C to 40°C
Mounting Accessories Available (Page 27)
Input Voltage: 120VAC
Easily adjust colour temperature with toggle switch

| SERIES | LENGTH | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | COLOR TEMP | INPUT VOLTAGE | CASE PACK QTY | ORDERING CODE |
|---|---|---|---|---|---|---|---|---|
| LED LINEAR STRIP LIGHT FIXTURE | 2FT | 20W | 2 X 17W T8 FLUORESCENT | 2600 | VARIABLE 3500K 4000K 5000K | 120VAC | 6 | LS24-20W-VAR-V1-120V |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# 3.7FT TUNABLE WHITE LED LINEAR STRIP LIGHT

Tunable White
LED Linear Strip Light
LS48-35W-VAR-V1-120V
LS48-35W-VAR-V1

Included Accessory for Covering Junction Box




5 Years

Lifetime
50 000 hours

IP54
Suitable for use in damp locations

0-10V
Dimmable

CERTIFIED

120V LS48 ONLY

120-347V LS48 ONLY

3500K
4000K
5000K
Toggle Switch
CCT Variable

## FEATURES

Knockouts on Both Sides and Back
Suitable for Chain-Mounting in a Row
Robust Aluminium Casing
Color Rendering Index: >80
Operating Temperature: -10°c to 40°c
Mounting Accessories Available (Page 27)
Input Voltage: 120-277VAC/120-347VAC
Easily adjust colour temperature with toggle switch

| SERIES | LENGTH | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | COLOR TEMP | INPUT VOLTAGE | CASE PACK QTY | MODEL NO. | ORDERING CODE |
|---|---|---|---|---|---|---|---|---|---|
| LED LINEAR STRIP LIGHT FIXTURE | 3.7FT | 35W | 2 X 32W T8 FLUORESCENT | 4550 | VARIABLE 3500K 4000K 5000K | 120-277VAC | 6 | WRA48L0035W-D3CCTV2 | LS48-35W-VAR-V1-120V |
| | | | | | | 120-347VAC | | WRA48L0035W-D-HV13CCTV2 | LS48-35W-VAR-V1 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# ACCESSORIES FOR LED LINEAR STRIP LIGHT

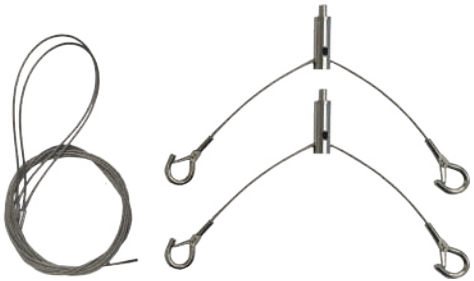

Suspension Kit
(Linear Strip Light)
LS-AC-S

Connector Kit
(Linear Strip Light)
LS-AC-C

| SERIES | DETAILS | COMPATIBLE WITH | MODEL NUMBER |
|---|---|---|---|
| SUSPENSION KIT (LINEAR STRIP LIGHT) | 2 POINT SUSPENSION<br>MAX LENGTH: 3.7FT | LINEAR STRIP LIGHT | LS-AC-S |
| CONNECTOR KIT (LINEAR STRIP LIGHT) | CONNECTS 2 4FT FIXTURES TO FORM AN 8FT FIXTURE<br>SOME SIMPLE ASSEMBLY REQUIRED | LINEAR STRIP LIGHT | LS-AC-C |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# LED STRIPS & EXTRUSIONS

# INDOOR LED STRIPS

Indoor LED Strip
ST-xxW-xxK-I-IN

3 Years
Lifetime 25 000 hours
IP20 Suitable for use in dry locations
Dimmable Transformer Dimmable
CERTIFIED

FEATURES
3M Peel Off Adhesive Tape for Easy Installation
Color Rendering Index: >90
Operating Temperature: -10°c to 40°c
Available in Custom Sizes (See Page 9)

| SERIES | INPUT VOLTAGE | POWER (WATTS) | POWER/ FT (WATTS) | LUMENS /FT | LED QTY | WIDTH | MIN. CUT DISTANCE | MAX LENGTH PER RUN | COLOR TEMP | MODEL NUMBER |
|---|---|---|---|---|---|---|---|---|---|---|
| 24W INDOOR STRIP (BY INCH) | 12VDC | 24 | 1.5 | 150 | 300 x 3528 | 0.32″ | 2" | ~25ft | 3000K | ST-24W-30K-I-IN |
| | | | | | | | | | 6000K | ST-24W-60K-I-IN |
| 72W INDOOR STRIP (BY INCH) | 12VDC | 72 | 4.5 | 400 | 300 x 5050 | 0.47″ | 2" | ~25ft | 3000K | ST-72W-30K-I-IN |
| | | | | | | | | | 4000K | ST-72W-40K-I-IN |
| | 24VDC | 72 | 4.5 | 400 | 300 x 5050 | 0.47″ | 4" | ~32ft | 3000K | ST-72W-30K-24V-I-IN |
| | | | | | | | | | 4000K | ST-72W-40K-24V-I-IN |
| 120W INDOOR STRIP (BY INCH) | 24VDC | 120 | 7.5 | 500 | 1200 x 3014 | 0.40″ | 1" | ~32ft | 3000K | ST-120W-30K-I-IN |
| | | | | | | | | | 6000K | ST-120W-60K-I-IN |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# WEATHERPROOF LED STRIPS

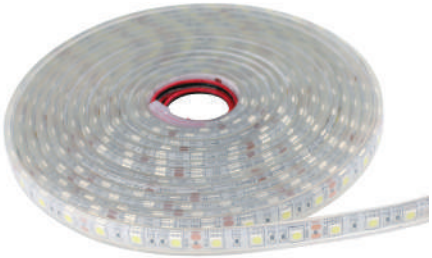

Weatherproof LED Strip
STxxxx-xxW-xx-IN

3 Years
Lifetime 25 000 hours
IP65 Suitable for use in wet locations
Dimmable Transformer Dimmable
CERTIFIED

FEATURES
3M Peel Off Adhesive Tape for Easy Installation
Color Rendering Index: >90
Operating Temperature: -10°C to 40°C
Available in Custom Sizes (See Page 9)

| SERIES | INPUT VOLTAGE | POWER (WATTS) | POWER/FT (WATTS) | LUMENS /FT | LED QTY | WIDTH | MIN. CUT DISTANCE | MAX LENGTH PER RUN | COLOR TEMP | MODEL NUMBER |
|---|---|---|---|---|---|---|---|---|---|---|
| 24W WEATHERPROOF STRIP (BY INCH) | 12VDC | 24 | 1.5 | 150 | 300 x 3528 | 0.32″ | 2" | ~25ft | 3000K | ST3528-24W-WW-IN |
| | | | | | | | | ~25ft | 6000K | ST3528-24W-CW-IN |
| | | | | | | | | ~25ft | RED | ST3528-24W-R-IN |
| | | | | | | | | ~25ft | GREEN | ST3528-24W-G-IN |
| 36W WEATHERPROOF STRIP (BY INCH) | 12VDC | 36 | 2.25 | 230 | 150 x 5050 | 0.47″ | 4" | ~25ft | 3000K | ST5050-36W-WW-IN |
| | | | | | | | | ~25ft | 6000K | ST5050-36W-CW-IN |
| | | | | | | | | ~25ft | RGB | ST5050-36W-RGB-IN |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# WEATHERPROOF LED STRIPS

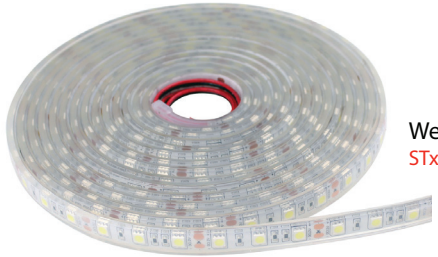

Weatherproof LED Strip
STxxxx-xxW-xx-IN

3 Years

Lifetime
25 000 hours

IP65
Suitable for use in wet locations

Dimmable
Transformer
Dimmable

CERTIFIED

FEATURES
See Page 30

| SERIES | INPUT VOLTAGE | POWER (WATTS) | POWER/FT (WATTS) | LUMENS /FT | LED QTY | WIDTH | MIN. CUT DISTANCE | MAX LENGTH PER RUN | COLOR TEMP | MODEL NUMBER |
|---|---|---|---|---|---|---|---|---|---|---|
| 48W WEATHERPROOF STRIP (BY INCH) | 12VDC | 48 | 3 | 330 | 600 x 3528 | 0.31″ | 25mm | ~25ft | 3000K | ST3528-48W-WW-IN |
| | | | | | | | | ~25ft | 4000K | ST3528-48W-40K-IN |
| | | | | | | | | ~25ft | 6000K | ST3528-48W-CW-IN |
| 72W WEATHERPROOF STRIP (BY INCH) | 12VDC | 72 | 4.5 | 400 | 300 x 5050 | 0.58′ | 50mm | ~25ft | 3000K | ST5050-72W-WW-IN |
| | | | | | | | | ~25ft | 4000K | ST5050-72W-40K-IN |
| | | | | | | | | ~25ft | 6000K | ST5050-72W-CW-IN |
| | | | | | | | | ~25ft | RGB | ST5050-72W-RGB-IN |
| | 24VDC | 72 | 4.5 | 400 | 300 x 5050 | 0.58′ | 100mm | ~32ft | 3000K | ST-72W-30K-24V-IN |
| | | | | | | | | ~32ft | 4000K | ST-72W-40K-24V-IN |
| | | | | | | | | ~32ft | RGBW | ST-72W-RGBW-24V-IN |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# LED STRIP ACCESSORIES

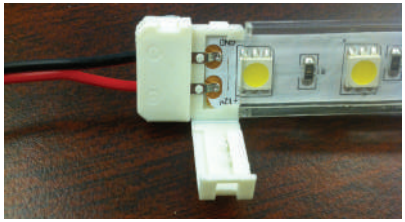

ARANI's revolutionary grip-on connectors serve as an efficient alternative to soldering. Soldering is still recommended for a stronger connection.

| SERIES | COMPATIBLE WITH | CONNECTOR TYPE | APPLICATION | MODEL NUMBER |
|---|---|---|---|---|
| 3528 STRIP CONNECTORS | ST3528 LED STRIPS<br>ST-24W-xxK-I STRIPS | 2 WIRES | STRIP TO WIRE | ST-C-2-3528 |
| | | NO WIRES | STRIP TO STRIP | ST-C-N-3528 |
| | | L SHAPE | STRIP TO STRIP (CORNERS) | C-L-3528 |
| 5050 STRIP CONNECTORS | ST5050 LED STRIPS<br>ST-72W-xxK-I STRIPS | 2 WIRES | STRIP TO WIRE | ST-C-2-5050 |
| | | NO WIRES | STRIP TO STRIP | ST-C-N-5050 |
| | | L SHAPE | STRIP TO STRIP (CORNERS) | C-L-5050 |
| RGB STRIP CONNECTORS | RGB LED STRIPS | 4 WIRES | STRIP TO WIRE | ST-C-4 |
| | | NO WIRES | STRIP TO STRIP | ST-C-N-RGB |
| | | L SHAPE | STRIP TO STRIP (CORNERS) | C-L-RGB |
| LED STRIP END CAP | ALL STRIPS | END CAP | SEALING STRIP END | ST-EC-C |
| LED STRIP INSTALLATION BRACKET | ALL STRIPS | BRACKET | SECURING STRIPS | AC-ST-IB |
| INSTALLATION KITS | ST3528 LED STRIPS<br>ST-24W-xxK-I STRIPS | 10 INSTALLATION BRACKETS, 2 CONNECTORS (3528 \| 2 WIRES), 4 END CAPS | | ST-C-3528-KIT |
| | ST5050 LED STRIPS<br>ST-72W-xxK-I STRIPS | 10 INSTALLATION BRACKETS, 2 CONNECTORS (5050 \| 2 WIRES), 4 END CAPS | | ST-C-5050-KIT |

# ALUMINIUM EXTRUSIONS

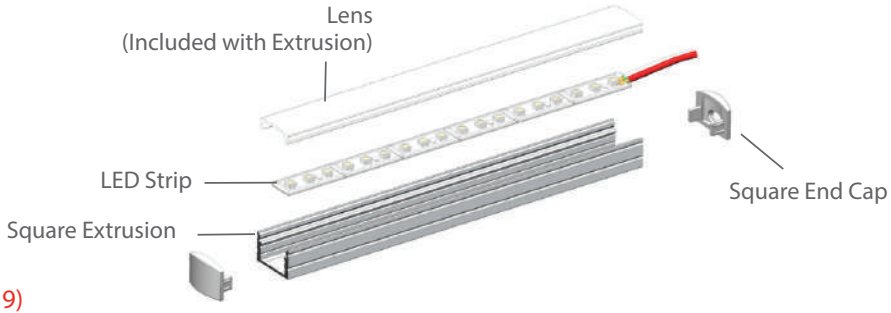


FEATURES
Snap-On Lens
Robust Aluminium Body
Surface-Mount Brackets Available
Available in Custom Sizes by the Inch (See Page 9)

| SERIES | FINISH | COMPATIBLE WITH | MODEL NUMBER |
|---|---|---|---|
| SQUARE EXTRUSION (BY INCH) | FROSTED | ALL STRIPS | PR-S-V1-IN |
| | OPAL | ALL STRIPS | PR-S-O-V1-IN |

SQUARE EXTRUSION
(Max 8FT)
PR-S-V1-IN




| SERIES | COMPATIBLE WITH | MODEL NUMBER |
|---|---|---|
| SQUARE END CAP (CLOSED) | SQUARE EXTRUSION | C-PR-EC-S-CL-V1 |
| SQUARE END CAP (OPEN) | SQUARE EXTRUSION | C-PR-EC-S-O-V1 |
| SQUARE BRACKETS | SQUARE EXTRUSION | C-PR-BR-S-V1 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# ALUMINIUM EXTRUSIONS

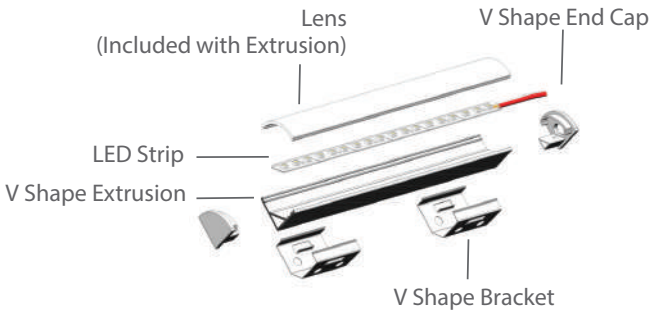


FEATURES
Snap-On Lens
Robust Aluminium Body
Surface-Mount Brackets Available
Available in Custom Sizes by the Inch (See Page 9)

| SERIES | FINISH | COMPATIBLE WITH | MODEL NUMBER |
|---|---|---|---|
| V SHAPE EXTRUSION (BY INCH) | FROSTED | ALL STRIPS | PR-V-V1-IN |
| | OPAL | ALL STRIPS | PR-V-O-V1-IN |

| SERIES | COMPATIBLE WITH | MODEL NUMBER |
|---|---|---|
| V SHAPE END CAP (CLOSED) | V SHAPE EXTRUSION | C-PR-EC-V-CL-V1 |
| V SHAPE END CAP (OPEN) | V SHAPE EXTRUSION | C-PR-EC-V-O-V1 |
| V SHAPE BRACKETS | V SHAPE EXTRUSION | C-PR-BR-V-V1 |

V SHAPE EXTRUSION
(Max 8FT)
PR-V-V1-IN




Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# ALUMINIUM EXTRUSIONS

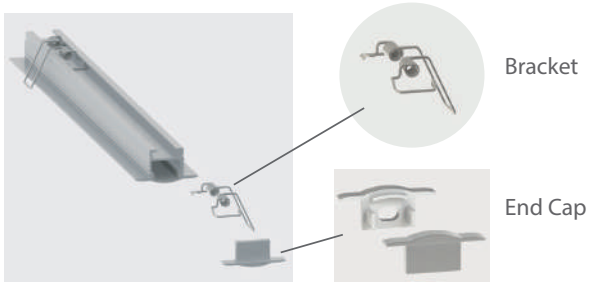


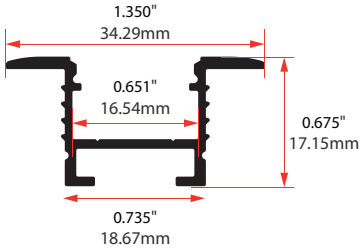


FEATURES
Snap-On Lens
Robust Aluminium Body
Fully Recesses into Gyproc/Drywall
Easy Snap-In Installation with Springs
Available in Custom Sizes by the Inch (See Page 9)

| SERIES | FINISH | COMPATIBLE WITH | MODEL NUMBER |
|---|---|---|---|
| RECESSED EXTRUSION (BY INCH) | FROSTED | ALL STRIPS | PR-RC-V1-IN |
| | OPAL | ALL STRIPS | PR-RC-O-V1-IN |

RECESSED EXTRUSION
PR-RC-V1-IN

| SERIES | COMPATIBLE WITH | MODEL NUMBER |
|---|---|---|
| RECESSED END CAP (CLOSED) | RECESSED EXTRUSION | C-PR-EC-RC-CL-V1 |
| RECESSED END CAP (OPEN) | RECESSED EXTRUSION | C-PR-EC-RC-O-V1 |
| RECESSED BRACKETS | RECESSED EXTRUSION | C-PR-BR-RC-V1 |




Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# LUNAR
# SIGNATURE RECESSED EXTRUSION

# LUNAR SIGNATURE RECESSED EXTRUSION

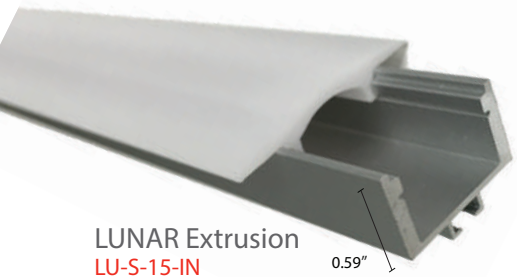


LUNAR Extrusion
LU-S-15-IN

Watch our LUNAR Highlight Video on our website!

LUNAR Lock System

Gyproc/ Drywall

LUNAR

FEATURES

Fully Recesses into Gyproc/Drywall

Easy Snap-In Installation with Springs

Snap-On Frosted Lens

Robust Aluminium Body

Available in Custom Sizes by the Inch (See Page 9)

Must ONLY be used with 48W (Page 31) & 120W (Page 27) LED Strips for a linear, dot-free look

Not suitable for RGB strips

| SERIES | COMPATIBLE WITH | MODEL NUMBER |
|---|---|---|
| LUNAR EXTRUSION | INDOOR 120W STRIPS (DOT-FREE LOOK)<br>WEATHERPROOF 48W STRIPS (DOTS VISIBLE)<br>NOT COMPATIBLE WITH RGB STRIPS | LU-S-15-IN |
| LUNAR SPRING | LUNAR EXTRUSION | LU-S-15-SP |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# UNIFORM LIGHTING FLEXITUBE

# UNIFORM LIGHTING FLEXITUBE

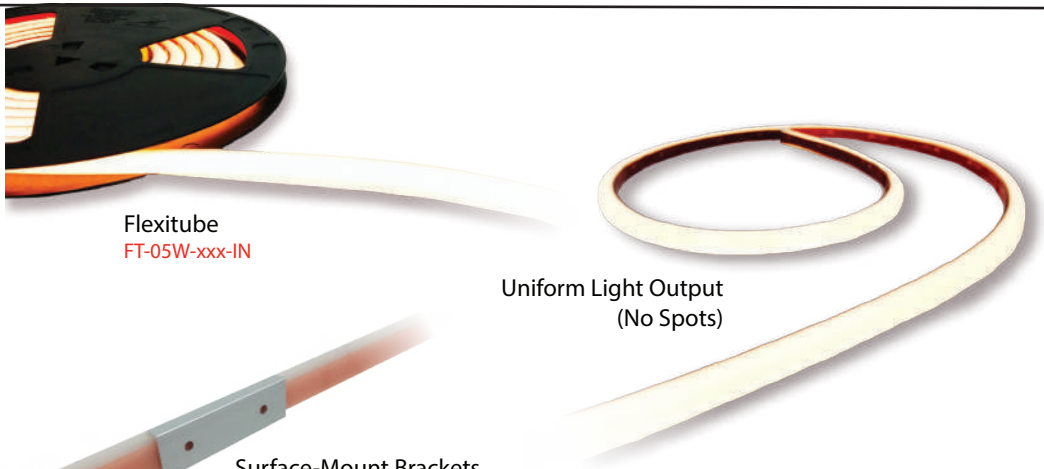

Flexitube
FT-05W-xxx-IN

Uniform Light Output
(No Spots)

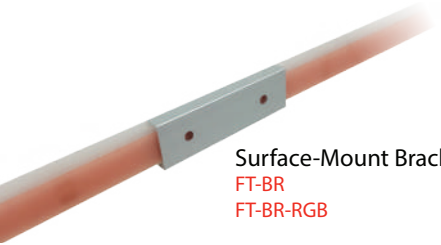

Surface-Mount Brackets
FT-BR
FT-BR-RGB

3M Adhesive Back

2 Years

Lifetime
25 000 hours

IP65
Suitable for use in wet locations

Dimmable

CERTIFIED

FEATURES
Uniform Light Output (No Spots)
Max Length per Run: 10 Meters (32.8ft)
3M Peel Off Adhesive Tape for Easy Installation
Flexible Silicone Finish
Color Rendering Index: >80
Operating Temperature: -50°C to 40°C
Available in Custom Sizes by the Inch (See Page 9)

| SERIES | INPUT VOLTAGE | MIN. CUT DISTANCE | POWER/FT (WATTS) | LUMENS/FT | WIDTH | COLOR TEMP | MODEL NUMBER |
|---|---|---|---|---|---|---|---|
| FLEXITUBE | 24VDC | 45mm (~1.77") | 5 | 425 | 0.43" (11mm) | 3000K | FT-05W-30K-IN |
| | | | | | | 4000K | FT-05W-40K-IN |
| | | | | 400 | 0.59" (15mm) | RGB | FT-05W-RGB-IN |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# DRIVERLESS 120V LED STRIP

# DRIVERLESS 120V LED STRIP

120V LED Strip with Power Cord
ST-120V-3W-xxK-V2 + ST-C-120V-PC5-V2

2 Years

Lifetime
25 000 hours

IP65
Suitable for use in wet locations

NOT Dimmable

FEATURES
Input Voltage: 120VAC
Color Rendering Index: >80
Operating Temperature: -10°C to 40°C
Max Length per Run: 150ft
Not Compatible with Aluminum Extrusions
Available in Custom Sizes by the Inch (See Page 9)

| SERIES | INPUT VOLTAGE | WIDTH | POWER/FT (WATTS) | LUMENS/ FT | MIN. CUT DISTANCE | COLOR TEMP | MODEL NUMBER | ORDERING CODE |
|---|---|---|---|---|---|---|---|---|
| DRIVERLESS 120V LED STRIP (BY INCH) | 120VAC | 0.60” | 3 | 200 | 10mm | 3000K | DOA-5730-60P-120V-3000K | ST-120V-3W-30K-V2-IN |
| | | | | | | 4000K | DOA-5730-60P-120V-4000K | ST-120V-3W-40K-V2-IN |

| ACCESSORIES | APPLICATION | MODEL NUMBER |
|---|---|---|
| 120V LED STRIP END CAP | SEALING STRIP END | ST-C-120V-EC-V2 |
| 120V LED STRIP BRACKET | SECURING STRIPS | ST-C-120V-BR-V2 |
| 120V LED STRIP CONNECTORS WITH 5FT WIRE AND AC PLUG V2 | POWERING STRIPS | ST-C-120V-PC5-V2 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# SIGN LIGHTING LED MODULES
## VERSION 2

Frosted Lens
Modules (3 LED chips) V2
MD3-50K-V2

GUARANTEE
3 Years

Lifetime
35 000 hours

IP68
Suitable for use in wet locations

Dimmable

FEATURES
Daisy Chain Mounting
Input Voltage: 12VDC
Beam Angle: 160°
Color Rendering Index: >80
Operating Temperature: -40°C to 40°C
For best results, install 3 units per square foot

| SERIES | POWER (WATTS) | LUMENS | COLOR TEMPERATURE | MODEL NUMBER |
|---|---|---|---|---|
| LED MODULES V2 (PACK OF 50) | 1.2 | 170 | 5000K | MD3-50K-V2 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# TUNABLE WHITE LED PANELS

## VERSIONS 3, 4

# ALL-IN-ONE LED PANELS V4

EASY TO INSTALL
Our junction box (included with the panel) is specifically designed to be large enough for your electrical connections.

All-In-One 2x4 LED Panel V4
PL24-VAR-V4
Also available in 1x4 (PL14-VAR-V4) and 2x2 (PL22-VAR-V4)

5 Years

Lifetime
50 000 hours

IP54
Suitable for use in damp locations

0-10V
Dimmable

3000K
5000K
4000K
Toggle Switch
CCT Variable

## FEATURES

Back-Lit
Robust Aluminium Casing with White Trim
Color Rendering Index: >80
Operating Temperature: -20°C to 45°C
Compatible Suspension Kits and Surface-Mount Kits Available (See Page 43)
Input Voltage: 120-347VAC
Easily adjust colour temperature and power with Toggle Switches on the Junction Box

| SERIES | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | COLOR TEMP | INPUT VOLTAGE | MODEL NO. | ORDERING CODE |
|---|---|---|---|---|---|---|---|
| 1FT X 4FT LED PANEL V4 | VARIABLE (35W/30W/25W) | 2 X 30W T8 FLUORESCENT | 4550lms at 35W 130lms/W | VARIABLE (3000K/4000K/5000K) | 120-347VAC | PAN14S0035W-X-Y-V4 | PL14-VAR-V4 |
| 2FT X 2FT LED PANEL V4 | VARIABLE (35W/30W/25W) | 2 X 30W T8 FLUORESCENT | 4550lms at 35W 130lms/W | VARIABLE (3000K/4000K/5000K) | 120-347VAC | PAN22S0035W-X-Y-V4 | PL22-VAR-V4 |
| 2FT X 4FT LED PANEL V4 | VARIABLE (50W/40W/30W) | 2 X 32W T8 FLUORESCENT | 6500lms at 50W 130lms/W | VARIABLE (3000K/4000K/5000K) | 120-347VAC | PAN24S0050W-X-Y-V4 | PL24-VAR-V4 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# REMOTE-CONTROLLED TUNABLE WHITE LED PANELS V3

Remote-Controlled 2x4 LED Panel V3
PL24-VAR-V3
Also available in 1x4 (PL14-VAR-V3)
and 2x2 (PL22-VAR-V3)

RF Wireless Remote for V3 LED Panels
(Sold Separately)
PL-V3-REMOTE
Controls up to 4 zones of lighting
(Unlimited number of panels per zone)
Uses 2 AAA Batteries (Included)
Range : 100 Feet (~30 meters)

5 Years

Lifetime
50 000 hours

IP54
Suitable for use in
damp locations

0-10V /
RF Control System
Dimmable

3000K 5000K
RF Control System
CCT Variable

CERTIFIED

## FEATURES

Robust Aluminium Casing with White Trim
Color Rendering Index: >80
Operating Temperature: 0°C to 40°C
Compatible Suspension Kits and Surface-Mount Kits Available (See Page 43)
Easily adjust colour temperature and dimming
with a wireless remote (Sold Separately)

| SERIES | CASE PACK QTY | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | DIMENSIONS | COLOR TEMP | INPUT VOLTAGE | MODEL NUMBER |
|---|---|---|---|---|---|---|---|---|
| 2 X 2 LED PANEL V3 | 4 | 40 | 2 X 30W T8 FLUORESCENT | 4400 | 24.00" x 24.00" x 2.00" (60.96cm x 60.96cm x 5.08cm) | CCT VARIABLE 3000K - 5000K | 120-277VAC | PL22-VAR-V3 |
| 2 X 4 LED PANEL V3 | 2 | 50 | 2 X 32W T8 FLUORESCENT | 5500 | 24.00" x 48.00" x 2.00" (60.96cm x 121.92cm x 5.08cm) | CCT VARIABLE 3000K - 5000K | 120-277VAC | PL24-VAR-V3 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# LED PANEL MOUNTING KITS

Surface-Mount Kit
PLxx-AC-M-Vx

Recessed Drywall Kit
PLxx-AC-RC-V2

Suspension Kit
PL-AC-S-4-V2
(PL-AC-S-2-V2 contains 1 less cable)

| SERIES | DETAILS | COMPATIBLE WITH | MODEL NUMBER |
|---|---|---|---|
| SURFACE-MOUNT KIT (ALL-IN-ONE LED PANELS V4) | ASSEMBLY REQUIRED | 1 X 4 ALL-IN-ONE LED PANELS V4 | PL14-AC-M-V4 |
| | | 2 X 2 ALL-IN-ONE LED PANELS V4 | PL22-AC-M-V4 |
| | | 2 X 4 ALL-IN-ONE LED PANELS V4 | PL24-AC-M-V4 |
| SURFACE-MOUNT KIT (REMOTE-CONTROLLED LED PANELS V3) | ASSEMBLY REQUIRED | 1 X 4 LED PANELS V3 | PL14-AC-M-V2 |
| | | 2 X 2 LED PANELS V3 | PL22-AC-M-V2 |
| | | 2 X 4 LED PANELS V3 | PL24-AC-M-V2 |
| RECESSED DRYWALL KIT (ALL LED PANELS) | ASSEMBLY REQUIRED | 1 X 4 LED PANELS | PL14-AC-RC-V2 |
| | | 2 X 2 LED PANELS | PL22-AC-RC-V2 |
| | | 2 X 4 LED PANELS | PL24-AC-RC-V2 |
| SUSPENSION KIT V2 (ALL LED PANELS) | 2 POINT SUSPENSION | 2X2 LED PANELS | PL-AC-S-2-V2 |
| | 3 POINT SUSPENSION (ONE IN MIDDLE) | 1X4, 2X4 LED PANELS | PL-AC-S-4-V2 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# EMERGENCY LIGHTING
## VERSION 1

# LED EMERGENCY REMOTE HEADS

2W LED Emergency Remote Head
(Single Head)
EM1-1-2W-V1

4W LED Emergency Remote Head
(Double Head)
EM1-2-4W-V1

7W LED Emergency Remote Head
(Single Head)
EM1-1-7W-V1

14W LED Emergency Remote Head
(Double Head)
EM1-2-14W-V1

5 Years

Lifetime
50 000 hours

IP40
Suitable for use in damp locations

FEATURES

Designed for Use with Emergency Battery Units
Surface-Mount
Adjustable Tilt & 180° Rotation
Input Voltage: 5-12VDC
Plastic Body
Operating Temperature: 0°C to 40°C

| SERIES | HEADS | POWER (WATTS) | LUMENS | COLOR TEMPERATURE | CASE PACK QTY | MODEL NUMBER |
|---|---|---|---|---|---|---|
| EMERGENCY LED REMOTE HEADS | SINGLE-HEAD | 2 | 250 | 6000K | 24 | EM1-1-2W-V1 |
| | | 7 | 440 | 6000K | 24 | EM1-1-7W-V1 |
| | DOUBLE-HEAD | 4 | 2 X 250 | 6000K | 24 | EM1-2-4W-V1 |
| | | 14 | 2 X 440 | 6000K | 24 | EM1-2-14W-V1 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# EMERGENCY BATTERY UNITS

4ft Power Cord (included)
EX-PC4

5 Years

Lifetime
50 000 hours

IP40
Suitable for use in damp locations

EX-BA1-36W-V1
EX-BA2-72W-V1
ONLY

EX-BA3-140W-V1
EX-BA3-275W-V1
ONLY

36W Emergency Battery Unit (Double Head)
EX-BA1-36W-V1

72W Emergency Battery Unit (Double Head)
EX-BA2-72W-V1

140W Emergency Battery Unit (Double Head)
EX-BA3-140W-V1

275W Emergency Battery Unit (Double Head)
EX-BA3-275W-V1

## FEATURES

Metal Body
Surface-Mount / Conduit-Mount
Battery Life: 2+ Hours
LED Double Head
(Adjustable Tilt & 180° Rotation)
Test Function
Knockouts on Sides & Back
Operating Temperature: 0°C to 40°C

| SERIES | BATTERY LIFE | BATTERY POWER (WATTS) | LED POWER (WATTS) | EFFECTIVE BATTERY POWER AFTER LED (WATTS) | INPUT VOLTAGE | OUTPUT VOLTAGE | CASE PACK QTY | MODEL NUMBER |
|---|---|---|---|---|---|---|---|---|
| EMERGENCY BATTERY UNIT | 2+ HOURS | 36 | 2 X 2 | 32 | 120-347VAC | 6VDC | 10 | EX-BA1-36W-V1 |
| | | 72 | 2 X 2 | 68 | | 12VDC | 10 | EX-BA2-72W-V1 |
| | | 140 | 2 X 5 | 130 | | 12VDC | 2 | EX-BA3-140W-V1 |
| | | 275 | 2 X 5 | 265 | | 12VDC | 1 | EX-BA3-275W-V1 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# LED RUNNING MAN COMBO

Running Man Combo
(36W Battery & Double Head)
EX-RM2-EM1-2-5W-V1
Power Cord Available Separately (EX-PC4)

Plastic Running Man Combo
(36W Battery & Double Head)
EX-RM4-EM2-2-5W-V1
Power Cord Available Separately (EX-PC4)

Included
Interchangeable Stencils:

2 x
Running Man
(Arrow facing
left or right)

1 x
Running Man
(No Arrow)

5 Years

Lifetime
50 000 hours

IP40
Suitable for use in
damp locations

FEATURES
Surface-Mount / Conduit-Mount
Battery Life: 2+ Hours
LED Double Head
(Adjustable Tilt & 180° Rotation)
Test Function
Knockouts on Sides & Back
Operating Temperature: 0°C to 40°C

| SERIES | BATTERY LIFE | BATTERY POWER (WATTS) | LED POWER (WATTS) | EFFECTIVE BATTERY POWER AFTER LED (WATTS) | INPUT VOLTAGE | OUTPUT VOLTAGE | CASE PACK QTY | MODEL NUMBER |
|---|---|---|---|---|---|---|---|---|
| RUNNING MAN BATTERY COMBO (METAL) | 2+ HOURS | 36 | 5 | 31 | 120-347VAC | 6VDC | 6 | EX-RM2-EM1-2-5W-V1 |
| PLASTIC RUNNING MAN BATTERY COMBO | | | | | | - | 10 | EX-RM4-EM2-2-5W-V1 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# LED RUNNING MAN SIGN

LED Running Man Sign
(Metal Body with Plastic Frame)
EX-RM1-2W-xx-V1

Included Interchangeable Stencils:

2 x
Running Man
( Arrow Facing Left or Right)

1 x
Running Man
(No Arrow)

1 x
White
For Single-Sided Applications

GUARANTEE
5 Years

Lifetime
50 000 hours

IP40
Convient aux endroits humides

FEATURES
Interchangeable Stencils
Single/Double-Sided
180° Adjustable Tilt
Surface-Mount / Wall-Mount
Operating Temperature: 0°C to 40°C

| SERIES | POWER (WATTS) | COLOR TEMP | INTEGRATED BATTERY? | BATTERY LIFE | INPUT VOLTAGE | CASE PACK QTY | MODEL NUMBER |
|---|---|---|---|---|---|---|---|
| RUNNING MAN SIGN | 2 | 5000K | YES | 2+ HOURS | 120-277VAC / 347V | 10 | EX-RM1-2W-BA-V1 |
| | | | NO | N/A | 6-24VDC / 120-277VAC / 347V | 10 | EX-RM1-2W-DC-V1 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# LED RUNNING MAN SIGN

LED Running Man Sign
(Plastic Body)
EX-RM4-1W-xx-V1

LED Running Man Sign
(Steel Body)
EX-RM2-1W-xx-V1

Included Interchangeable Stencils:

1 x
Running Man
(Arrow Facing Right)

1 x
Running Man
(Arrow Facing Left)

1 x
Running Man
(No Arrow)

5 Years

Lifetime
50 000 hours

IP40
Suitable for use in damp locations

FEATURES
Interchangeable Stencils
Single/Double-Sided
Surface-Mount / Wall-Mount
Operating Temperature: 4°C to 32°C

| SERIES | MATERIAL | POWER (WATTS) | COLOR TEMP | INTEGRATED BATTERY? | BATTERY LIFE | INPUT VOLTAGE | MODEL NUMBER |
|---|---|---|---|---|---|---|---|
| RUNNING MAN SIGN | PLASTIC | 1 | 5000K | YES | 2+ HOURS | 120-277VAC / 347V | EX-RM4-1W-BA-V1 |
| | | | | NO | N/A | 6-24VDC / 120-277VAC / 347V | EX-RM4-1W-DC-V1 |
| | METAL (STEEL) | | | YES | 2+ HOURS | 120-277VAC / 347V | EX-RM2-1W-BA-V1 |
| | | | | NO | N/A | 6-24VDC / 120-277VAC / 347V | EX-RM2-1W-DC-V1 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# MINI
# LED FLOOD LIGHTS

# MINI LED FLOOD LIGHTS

Mini LED Flood Light V4
(Bracket)
FL-xxW-xxK-Y-V4

Mini LED Flood Light V4
(Knuckle)
FL-xxW-xxK-K-V4

5 Years

Lifetime
50 000 hours

IP66
Suitable for use in wet locations

CERTIFIED

15W, 4000K
50W, 4000K, 5000K
ONLY

15W, 3000K
ONLY

FEATURES
Suitable for Landscape Lighting
Robust Aluminium Casing
Input Voltage: 100-277VAC
Color Rendering Index: >70
Operating Temperature: -40°C to 45°C

| SERIES | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | INPUT VOLTAGE | COLOR TEMP | MODEL NUMBER | MOUNTING OPTION | ORDERING CODE |
|---|---|---|---|---|---|---|---|---|
| MINI FLOOD LIGHT V4 | 15 | 45W MH | 1800 | 100-277VAC | 3000K | FLO12R0015W-80X110-[K,Y]-30K | KNUCKLE | FL-15W-30K-K-V4 |
| | | | | | | | BRACKET | FL-15W-30K-Y-V4 |
| | | | | | 4000K | FLO12R0015W-80X110-[K,Y]-40K[BLANK;(PTC)]-V4 | KNUCKLE | FL-15W-40K-K-V4 |
| | | | | | | | BRACKET | FL-15W-40K-Y-V4 |
| | 50 | 150W MH | 6000 | 100-277VAC | 4000K | FLO12R0050W-80X110-[K,Y]-40K[BLANK;(PTC)]-V4 | KNUCKLE | FL-50W-40K-K-V4 |
| | | | | | | | BRACKET | FL-50W-40K-Y-V4 |
| | | | | | 5000K | FLO12R0050W-80X110-[K,Y]-50K[BLANK;(PTC)]-V4 | KNUCKLE | FL-50W-50K-K-V4 |
| | | | | | | | BRACKET | FL-50W-50K-Y-V4 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# HYBRID
# LED SHOEBOX FLOOD LIGHT
## VERSION 4

# HYBRID LED SHOEBOX FLOOD LIGHT

Shorting Cap (included)
Always using shorting cap unless photocell installed



5 Years

Lifetime
50 000 hours

IP65
Suitable for use in wet locations

0-10V
Dimmable

CERTIFIED

PREMIUM

Hybrid Shoebox Flood Light
(60W/100W)
with Bracket
SH-60W-40K-V4 + SH-BR-V4
SH-100W-xxK-V4 + SH-BR-V4

Hybrid Shoebox Flood Light
(60W/100W)
with Slip-Fitter
SH-60W-40K-V4 + SH-SL-V4
SH-100W-xxK-V4 + SH-SL-V4

Hybrid Shoebox Flood Light
(60W/100W)
with Wall-Mount
SH-60W-40K-V4 + SH-WM-V4
SH-100W-xxK-V4 + SH-WM-V4

FEATURES
Comes with a 6-FT Cord
Type 5 Lighting Distribution
Robust Die-Cast Aluminium Casing
Color Rendering Index: >70
Operating Temperature: -40°C to 50°C Must Choose 1 of 3 Mounting Accessories: Wall-Mount/Slip-Fitter/Bracket (See Page 60)

| SERIES | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | WEIGHT | COLOR TEMP | INPUT VOLTAGE | MODEL NUMBER | ORDERING CODE |
|---|---|---|---|---|---|---|---|---|
| HYBRID LED SHOEBOX FLOOD LIGHT V4 | 60 | 200W MH | 9000 | 3.8kg | 4000K | 100-277VAC | SHB12R0060W-4000K-D-V4 | SH-60W-40K-V4 |
| | | | | | | 347V | SHB12R0060W-4000K-DH-V4 | SH-60W-40K-V4-347V |
| | 100 | 300W MH | 14000 | 4.0kg | 4000K | 100-277VAC | SHB12R0100W-4000K-D-V4 | SH-100W-40K-V4 |
| | | | | | 5000K | 100-277VAC | SHB12R0100W-5000K-D-V4 | SH-100W-50K-V4 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# HYBRID LED SHOEBOX FLOOD LIGHT

Hybrid Shoebox Flood Light
(150W/200W)
with Bracket
SH-150W-xxK-V4 + SH-BR-V4
SH-200W-xxK-V4 + SH-BR-V4



Hybrid Shoebox Flood Light
(150W/200W)
with Slip-Fitter
SH-150W-xxK-V4 + SH-SL-V4
SH-200W-xxK-V4 + SH-SL-V4

Hybrid Shoebox Flood Light
(150W/200W)
with Wall-Mount
SH-150W-xxK-V4 + SH-WM-V4
SH-200W-xxK-V4 + SH-WM-V4

5 Years
Lifetime
50 000 hours
IP65
Suitable for use in wet locations
0-10V
Dimmable
CERTIFIED

FEATURES
Comes with a 6-FT Cord
Type 5 Lighting Distribution
Robust Die-Cast Aluminium Casing
Color Rendering Index: >70
Operating Temperature: -40°C to 50°C

Must Choose 1 of 3 Mounting Accessories:
Wall-Mount/Slip-Fitter/Bracket (See Page 60)

| SERIES | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | WEIGHT | COLOR TEMP | INPUT VOLTAGE | MODEL NUMBER | ORDERING CODE |
|---|---|---|---|---|---|---|---|---|
| HYBRID LED SHOEBOX FLOOD LIGHT V4 | 150 | 400W MH | 20000 | 5.8kg | 4000K | 100-277VAC | SHB12R0150W-4000K-D-V4 | SH-150W-40K-V4 |
| | | | | | | 347V | SHB12R0150W-4000K-DH-V4 | SH-150W-40K-V4-347V |
| | | | | | 5000K | 100-277VAC | SHB12R0150W-5000K-D-V4 | SH-150W-50K-V4 |
| | | | | | | 347V | SHB12R0150W-5000K-DH-V4 | SH-150W-50K-V4-347V |
| | 200 | 600W MH | 28000 | 6.1kg | 5000K | 100-277VAC | SHB12R0200W-5000K-D-V4 | SH-200W-50K-V4 |
| | | | | | | 347V | SHB12R0200W-5000K-DH-V4 | SH-200W-50K-V4-347V |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# HYBRID LED SHOEBOX FLOOD LIGHT



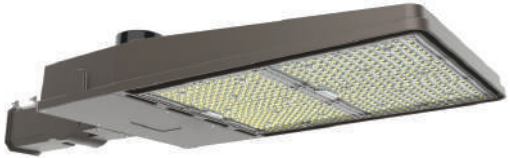

Hybrid Shoebox Flood Light
(300W)
with Slip-Fitter
SH-300W-50K-V4 + SH-SL-V4

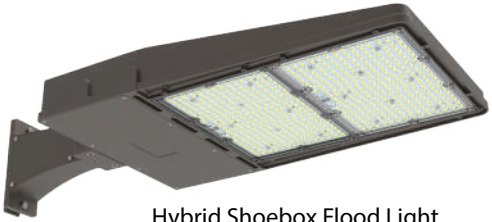

Hybrid Shoebox Flood Light
(300W)
with Wall-Mount
SH-300W-50K-V4 + SH-WM-V4

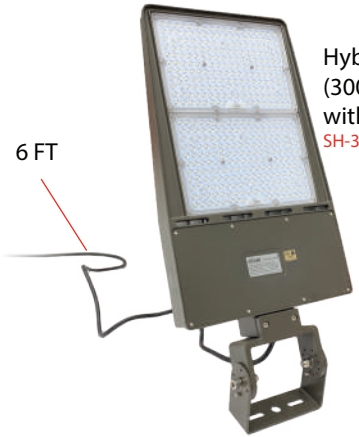


Hybrid Shoebox Flood Light
(300W)
with Bracket
SH-300W-50K-V4 + SH-BR-V4

5 Years
Lifetime
50 000 hours
IP65
Suitable for use in wet locations
0-10V
Dimmable
CERTIFIED
PREMIUM

FEATURES
Comes with a 6-FT Cord
Type 5 Lighting Distribution
Robust Die-Cast Aluminium Casing
Color Rendering Index: >70
Operating Temperature: -40°C to 50°C Must Choose 1 of 3 Mounting Accessories: Wall-Mount/Slip-Fitter/Bracket (See Page 60)

| SERIES | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | WEIGHT | COLOR TEMP | INPUT VOLTAGE | MODEL NUMBER | ORDERING CODE |
|---|---|---|---|---|---|---|---|---|
| HYBRID LED SHOEBOX FLOOD LIGHT V4 | 300 | 1000W MH | 42000 | 8.5kg | 5000K | 100-277VAC | SHB12R0300W-5000K-D-V4 | SH-300W-50K-V4 |
| | | | | | | 347V | SHB12R0300W-5000K-DH-V4 | SH-300W-50K-V4-347V |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# HYBRID LED SHOEBOX FLOOD LIGHT ACCESSORIES

Slip Fitter
SH-SL-V4



Wall-Mount
SH-WM-V4

Flood Light Bracket
SH-BR-V4

FEATURES
Easy Installation (Insert and Screw Down)
Robust Aluminum Body
Choice of 1 Mounting Accessory Included with Every Hybrid Shoebox Flood Light

| SERIES | COMPATIBLE WITH | INSTALLATION | APPLICATION | MODEL NUMBER |
|---|---|---|---|---|
| SLIP FITTER V4 | HYBRID SHOEBOX FLOOD LIGHTS V4 | Ø2 1/2" ROUND POLE | ALLOWS ADJUSTMENT OF FIXTURE ANGLE | SH-SL-V4 |
| WALL-MOUNT V4 | HYBRID SHOEBOX FLOOD LIGHTS V4 | WALL/ SQUARE/ROUND POLE | DOES NOT REQUIRE JUNCTION BOX NO FIXTURE ANGLE ADJUSTMENT POSSIBLE | SH-WM-V4 |
| FLOOD LIGHT BRACKET V4 | HYBRID SHOEBOX FLOOD LIGHTS V4 | WALL/GROUND | ALLOWS ADJUSTMENT OF FIXTURE ANGLE REQUIRES JUNCTION BOX | SH-BR-V4 |



Photocell
SH-CELL-V4
Sold separately

Photocell
SH-CELL-V4-347V
Sold separately

FEATURES
Easy Installation (Insert and Twist)
Daylight Sensing

| SERIES | COMPATIBLE WITH | MODEL NUMBER |
|---|---|---|
| PHOTOCELL FOR HYBRID SHOEBOX FLOOD LIGHT V4 | 100-277VAC HYBRID SHOEBOX FLOOD LIGHT V4 | SH-CELL-V4 |
| | 347V HYBRID SHOEBOX FLOOD LIGHT V4 | SH-CELL-V4-347V |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm (EST). For latest stock information, please consult arani.ca.

# HYBRID LED SHOEBOX FLOOD LIGHT ACCESSORIES




4" Square Pole to 2 3/8" Tenon Adapter
SH-ADAPT-4238-S

4" Round Pole to 2 3/8" Tenon Adapter
SH-ADAPT-4238




5" Square Pole to 2 3/8" Tenon Adapter
SH-ADAPT-5238-S

5" Round Pole to 2 3/8" Tenon Adapter
SH-ADAPT-5238

FEATURES
Easy Installation (Insert and Screw)
Robust Metal Body

| SERIES | COMPATIBLE WITH | INSTALLATION | APPLICATION | MODEL NUMBER |
|---|---|---|---|---|
| 4" SQUARE POLE TO 2 3/8" TENON ADAPTER | SLIP FITTER FOR HYBRID SHOEBOX FLOOD LIGHT | 4" SQUARE POLE | ALLOWS INSTALLATION OF Ø2 1/2" SLIP FITTER ON 4" SQUARE POLE | SH-ADAPT-4238-S |
| 4" ROUND POLE TO 2 3/8" TENON ADAPTER | SLIP FITTER FOR HYBRID SHOEBOX FLOOD LIGHT | 4" ROUND POLE | ALLOWS INSTALLATION OF Ø2 1/2" SLIP FITTER ON 4" ROUND POLE | SH-ADAPT-4238 |
| 5" SQUARE POLE TO 2 3/8" TENON ADAPTER | SLIP FITTER FOR HYBRID SHOEBOX FLOOD LIGHT | 5" SQUARE POLE | ALLOWS INSTALLATION OF Ø2 1/2" SLIP FITTER ON 5" SQUARE POLE | SH-ADAPT-5238-S |
| 5" ROUND POLE TO 2 3/8" TENON ADAPTER | SLIP FITTER FOR HYBRID SHOEBOX FLOOD LIGHT | 5" ROUND POLE | ALLOWS INSTALLATION OF Ø2 1/2" SLIP FITTER ON 5" ROUND POLE | SH-ADAPT-5238 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# LED CANOPY LIGHT

## VERSIONS 4 , 5

# SLIM PROFILE LED CANOPY LIGHT

Canopy Light V5
CLxxW-40K-V5

Canopy Light V4
CL-40K-V4-xxW

Photocell
K4227 (347V) / K4221C (120V)
(Sold separately)

5 Years

Lifetime
50 000 hours

IP65
Suitable for use in wet locations

V5
Versions

FEATURES
Slim Profile
Robust Aluminium Casing
Polycarbonate Lens
Color Rendering Index: >80
Operating Temperature: -20°C to 40°C
Compatible photocell available

| SERIES | CASE PACK QTY | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | COLOR TEMP | INPUT VOLTAGE | MODEL NUMBER |
|---|---|---|---|---|---|---|---|
| CANOPY LIGHT | 6 | 40W | 175W MH | 5350 | 4000K | 100-277VAC | CL-40W-40K-V5 |
| | | 60W | 250W MH | 7800 | 4000K | 100-277VAC | CL-60W-40K-V5 |
| | | | | | | 347V | CL-40K-V4-60W-347V |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# 100-347VAC
# LED VAPOR TIGHT FIXTURE
## VERSION 3

# 100-347VAC LED VAPOR TIGHT FIXTURE

Clip-On Clip-Off
Stainless Steel Lens

5 Years

Lifetime
50 000 hours

IP65
Suitable for use in wet locations

0-10V
Dimmable

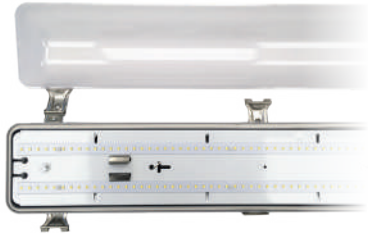

Vapor Tight Fixture
VT48-46W-xxK-V3

FEATURES
NEMA 4X
Input Voltage: 100-347VAC
Shatter Resistant
Polycarbonate Clip-On Clip-Off Lens (Hands-Free)
Easy to remove circuit board
Rust-Proof Plastic Body
Beam Angle: 100°
Color Rendering Index: >80
Operating Temperature: -25°C to 45°C

| SERIES | CASE PACK QTY | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | INPUT VOLTAGE | COLOR TEMP | MODEL NO. | ORDERING CODE |
|---|---|---|---|---|---|---|---|---|
| VAPOR TIGHT FIXTURE V3 | 4 | 46 | 2 x 50W T5 FLUORESCENT | 5980 | 100-347VAC | 4000K | VPT0046W-4VTMDHV1-40K-V3 | VT48-46W-40K-V3 |
| | | | | | | 5000K | VPT0046W-4VTMDHV1-50K-V3 | VT48-46W-50K-V3 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# SIGNATURE LED WALL PACKS

# CLASSIC LED WALL PACK 2

Wall Pack 2
WP2-xxW-xxK-V3

Photocell
WP-CELL-V3
(Sold separately)

5 Years

Lifetime
50 000 hours

IP66
Suitable for use in wet locations

120-277VAC
ONLY

347V
ONLY

40W, 5000K
120W, 5000K
ONLY

FEATURES

Robust Aluminium Casing
Polycarbonate Lens
Color Rendering Index: >75
Operating Temperature: -40°C to 50°C
Compatible photocell available (WP-CELL-V3)

| SERIES | INPUT VOLTAGE | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | COLOUR | MODEL NUMBER |
|---|---|---|---|---|---|---|
| WALL PACK 2 | 120-277V | 40 | 100W MH | 4800 | 5000K | WP2-40W-50K-V3 |
| | | 60 | 175W MH | 7200 | 4000K | WP2-60W-40K-V3 |
| | | | | | 5000K | WP2-60W-50K-V3 |
| | | 120 | 250W MH | 14400 | 4000K | WP2-120W-40K-V3 |
| | 347V | 70 | 175W MH | 8100 | 5000K | WP2-65W-50K-V3-347V |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# LED WALL PACK 10 (INTEGRATED PHOTOCELL)

5 Years

Lifetime
50 000 hours

IP66
Suitable for use in wet locations

Wall Pack 10 V2
Photocell Technology
WP10-18W-xxK-V2




FEATURES
Integrated Photocell
Robust Aluminium Casing
Polycarbonate Lens
Color Rendering Index: >80
Operating Temperature: -40°C to 45°C
Input Voltage: 120-277VAC

| SERIES | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | COLOR TEMP | MODEL NUMBER | ORDERING CODE |
|---|---|---|---|---|---|---|
| WALL PACK 10 VERSION 2 | 18W | 75W MH | 1980 | 4000K | WAL12R0018W-H-40K-V2 | WP10-18W-40K-V2 |
| | | | | 5000K | WAL12R0018W-H-50K-V2 | WP10-18W-50K-V2 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# LED WALL PACK 11 (ADJUSTABLE WITH INTEGRATED PHOTOCELL)

**Wall Pack 11**
Adjustable Incline
Photocell Technology
WP11-xxW-xxK-V2

5 Years

Lifetime
50 000 hours

IP66
Suitable for use in wet locations

## FEATURES

0 to >90° Adjustable Tilt
Integrated Photocell Technology
Dark Sky Compliant
Robust Aluminium Casing
Robust Plastic Lens
Input Voltage: 120-277VAC
Color Rendering Index: >75
Operating Temperature: -40°C to 40°C

| SERIES | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | DIMENSIONS | CASE PACK QTY | COLOR TEMP | MODEL NO. | ORDERING CODE |
|---|---|---|---|---|---|---|---|---|
| WALL PACK 11 | 27 | 100W MH | 3600 | 9.13" x 7.29" x 4.20" | 6 | 4000K | WAL06R0027W-40KDP0-V2 | WP11-27W-40K-V2 |
| | | | | | | 5000K | WAL06R0027W-50KDP0-V2 | WP11-27W-50K-V2 |
| | 67 | 250W MH | 8900 | 11.02" x 10.06" x 5.09" | 1 | 4000K | WAL06R0067W-40KDP0-V2 | WP11-67W-40K-V2 |
| | | | | | | 5000K | WAL06R0067W-50KDP0-V2 | WP11-67W-50K-V2 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# LED HIGH BAYS

# SIGNATURE LED HIGH BAY

100W/150W LED High Bay
(100-277VAC)
Round Driver
U-Bracket Not Included
HB-100W-xxK-R-V2
HB-150W-xxK-R-V2

100W/150W LED High Bay
(100-347VCA)
Rectangular Driver
U-Bracket Included
HB-100W-xxK-R-V2-347
HB-150W-xxK-R-V2-347

U-Bracket
HB-BR-V2
Sold separately for
100-277VAC high bays

5 Years

Lifetime
50 000 hours

IP65
Suitable for use in wet locations

0-10V
Dimmable

NOT
Explosion-Proof

CERTIFIED

FEATURES
Comes with a 6-FT Cord
Bracket/Hook Mount
Robust Aluminium Casing with Polycarbonate Cover
Color Rendering Index: >70
Beam Angle: 110°
Operating Temperature: -20°C to 55°C

| SERIES | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | DIMENSIONS | COLOR TEMP | INPUT VOLTAGE | MODEL NUMBER | ORDERING CODE |
|---|---|---|---|---|---|---|---|---|
| 100W LED HIGH BAY | 100 | 200W MH | 13000 | Ø280mm x 188mm | 4000K | 100-277VAC | HIG12R0100W-4000K-D-V2 | HB-100W-40K-R-V2 |
| | | | | | 5000K | 100-277VAC | HIG12R0100W-5000K-D-V2 | HB-100W-50K-R-V2 |
| 150W LED HIGH BAY | 150 | 330W MH | 19500 | Ø280mm x 188mm | 4000K | 100-277VAC | HIG12R0150W-4000K-D-V2 | HB-150W-40K-R-V2 |
| | | | | | | 100-347VAC | HIG12R0150W-4000K-DC-V2 | HB-150W-40K-R-V2-347 |
| | | | | | 5000K | 100-277VAC | HIG12R0150W-5000K-D-V2 | HB-150W-50K-R-V2 |
| | | | | | | 100-347VAC | HIG12R0150W-5000K-DC-V2 | HB-150W-50K-R-V2-347 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# SIGNATURE LED HIGH BAY

200W LED High Bay
(100-277VAC)
Round Driver
U-Bracket Not Included
HB-200W-xxK-R-V2

200W LED High Bay
(100-347VCA)
Rectangular Driver
U-Bracket Included
HB-200W-xxK-R-V2-347

U-Bracket
HB-BR-V2
Sold separately for
100-277VAC high bays

5 Years

Lifetime
50 000 hours

IP65
Suitable for use in
wet locations

0-10V
Dimmable

NOT
Explosion-Proof

CERTIFIED

FEATURES
Comes with a 6-FT Cord
Bracket/Hook Mount
Robust Aluminum Casing with Polycarbonate Cover
Color Rendering Index: >70
Beam Angle: 110°
Operating Temperature: -20°C to 55°C

| SERIES | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | DIMENSIONS | COLOR TEMP | INPUT VOLTAGE | MODEL NUMBER | ORDERING CODE |
|---|---|---|---|---|---|---|---|---|
| 200W LED HIGH BAY | 200 | 400W MH | 26000 | Ø320mm x 188mm | 4000K | 100-277VAC | HIG12R0200W-4000K-D-V2 | HB-200W-40K-R-V2 |
| | | | | | | 100-347VAC | HIG12R0200W-4000K-DC-V2 | HB-200W-40K-R-V2-347 |
| | | | | | 5000K | 100-277VAC | HIG12R0200W-5000K-D-V2 | HB-200W-50K-R-V2 |
| | | | | | | 100-347VAC | HIG12R0200W-5000K-DC-V2 | HB-200W-50K-R-V2-347 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# LED HIGH BAY ACCESSORIES

300W LED High Bay
Rectangular Driver
U-Bracket Included
HB-300W-50K-DS

5 Years

Lifetime
50 000 hours

IP65
Suitable for use in wet locations

0-10V
Dimmable

NOT
Explosion-Proof

HB-300W-50K-DS
ONLY

FEATURES
Comes with a 6-FT Cord
Bracket/Hook Mount
Robust Aluminum Casing with Polycarbonate Cover
Color Rendering Index: >70
Beam Angle: 110°
Operating Temperature: -20°C to 55°C

| SERIES | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | DIMENSIONS | COLOR TEMP | INPUT VOLTAGE | MODEL NUMBER | ORDERING CODE |
|---|---|---|---|---|---|---|---|---|
| 300W LED HIGH BAY | 300 | 600W MH | 42000 | Ø400mm x 156mm | 5000K | 100-277VAC | HB-300W-50K-DS | HB-300W-50K-DS |
| | | | | | | 347V | N/A | HB-300W-50K-DS-347V |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# LED TUBES

## T8 TUBES

# DIRECT CONNECT LED T8 TUBE

**T8 Tube V8 Hybrid**
4FT, Polycarbonate Lens
T48T8-xxK-V8

**T8 Tube V2**
8FT, 1 Pin
T96T8-xxK-V2-1P

**T8 Tube V2**
8FT, R17D / 2 Pin
T96T8-xxK-V2-HO
Remove the R17D cap for a 2 Pin Tube

5 Years

Lifetime
50 000 hours

IP40
Suitable for use in damp locations

8ft Tubes ONLY

FEATURES
Direct Connect To 120V
Not suitable to use with a ballast
Beam Angle: 180°
Color Rendering Index: >75 Operating
Temperature: -10°C to 40°C

| SERIES | LENGTH | CASE PACK QTY | PINS | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | INPUT VOLTAGE | COLOR TEMP | MODEL NUMBER |
|---|---|---|---|---|---|---|---|---|---|
| HYBRID T8 TUBE V8 | 4FT | 30 | 2 | 15 | 30W FLUORESCENT | 1900 | 100-277V | 4000K | T48T8-40K-V8 |
| | | | | | | | | 5000K | T48T8-50K-V8 |
| VERSION 2 T8 TUBES | 8FT | 25 | 1 | 40 | 80W FLUORESCENT | 5200 | 100-277V | 4000K | T96T8-40K-V2-1P |
| | | | | | | | 100-277V | 5000K | T96T8-50K-V2-1P |
| | | | R17D/2 | 40 | 80W FLUORESCENT | 5200 | 100-277V | 5000K | T96T8-50K-V2-HO |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# SIGNATURE LED LAMPS

# SIGNATURE LED LAMPS

PAR16 V7

PAR30 V8 (Short Neck)

PAR38 V8

GUARANTEE
5 Years

Lifetime
50 000 hours

IP54
Suitable for use in damp locations
PAR16, PAR30 ONLY

IP66
Suitable for use in wet locations
PAR38 ONLY

Dimmable

CERTIFIED

FEATURES
Concealed Heat Sinks
Input Voltage: 90-130V AC
Operating Temperature: -25°C to 40°C

| SERIES | CASE PACK QTY | BASE | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | CRI | BEAM ANGLE | COLOR | MODEL NUMBER |
|---|---|---|---|---|---|---|---|---|---|
| PAR16 LAMP V7 | 100 | E26 | 7 | 50W INCANDESCENT | 550 | 94.6 | 40° | 4000K | BPAR16-40K-V7 |
| PAR30 LAMP V8 SHORT NECK | 20 | E26 | 10 | 75W INCANDESCENT | 800 | 80< | | 3000K | BPAR30-30K-V8-SN-SN |
| PAR38 LAMP V8 | 16 | E26 | 13 | 120W INCANDESCENT | 1100 | 80< | | 3000K | BPAR38-30K-V8 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# SIGNATURE LED LAMPS

MR11 Lamp V1

FEATURES
Operating Temperature: -25°C to 40°C

3 Years | Lifetime 25 000 hours | IP54 Suitable for use in damp locations | Dimmable

| SERIES | BASE | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | INPUT VOLTAGE | CRI | BEAM ANGLE | COLOR | MODEL NUMBER |
|---|---|---|---|---|---|---|---|---|---|
| MR11 LAMP V1 | MR11 | 2 | 10W INCANDESCENT | 75 | 12V | >80 | 45° | 6000K | BMR11-60K-V1 |

G4 Lamp V5

G9 Lamp V3

FEATURES
Operating Temperature: -20°C to 40°C

2 Years | Lifetime 20 000 hours | IP20 Suitable for use in damp locations | Dimmable (BG9-xxK-V3) | ETL Approved: BG9-xxK-V3

| SERIES | CASE PACK QTY | BASE | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | INPUT VOLTAGE | CRI | BEAM ANGLE | COLOR | MODEL NUMBER |
|---|---|---|---|---|---|---|---|---|---|---|
| G4 LAMP V5 | 100 | G4 | 1.5 | 10W INCANDESCENT | 130 | 12AC/DC | >80 | 330° | 3000K | BG4-30K-V5 |
| | | | | | | | | | 4000K | BG4-40K-V5 |
| G9 LAMP V3 | 100 | G9 | 3 | 20W INCANDESCENT | 300 | 120VAC | >80 | 330° | 3000K | BG9-30K-V3 |
| | | | | | | | | | 4000K | BG9-40K-V3 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# SIGNATURE LED LAMPS



5 Years

Lifetime
50 000 hours

IP54
Suitable for use in damp locations

Dimmable

CERTIFIED

MR16 Lamp V7

A19 Lamp V8

FEATURES
Concealed Heat Sinks
Operating Temperature: -25°C to 40°C

| SERIES | CASE PACK QTY | BASE | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | INPUT VOLTAGE | CRI | BEAM ANGLE | COLOR | MODEL NUMBER |
|---|---|---|---|---|---|---|---|---|---|---|
| MR16 LAMP V7 | 100 | MR16 | 6.5 | 50W INCANDESCENT | 500 | 12V | >80 | 40° | 3000K | BMR16-30K-V7 |
| | | | | | | | | | 4000K | BMR16-40K-V7 |
| BA19 LAMP V8 | 50 | E26 | 10 | 60W INCANDESCENT | 800 | 90-130VAC | >80 | 240° | 3000K | BA19-30K-V8 |
| | | | | | | | | | 4000K | BA19-40K-V8 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# LED ACCESSORIES

30W Transformer with Power Cord
DR-12V-30W

60W Transformer with Power Cord
DR-12V-60W

96W Transformer with Power Cord
DR-xxV-96W

GUARANTEE
1 Year

Suitable for use in dry locations

NOT Dimmable

CERTIFIED

FEATURES

Efficiency: 85%

Operating Temperature: -5°C to 45°C

| SERIES | OUTPUT | POWER (WATTS) | INPUT VOLTAGE | MAX OUTPUT CURRENT (A) | DIMENSIONS | CASE PACK QTY | MODEL NUMBER |
|---|---|---|---|---|---|---|---|
| TRANSFORMERS WITH POWER CORD | 12VDC | 30 | 100-265VAC | 3.0 | 4.65″ x 2″ x 1.2″ (118mm x 50mm x 30mm) | 30 | DR-12V-30W |
| | | 60 | 100-265VAC | 5.0 | 4.65″ x 2″ x 1.2″ (118mm x 50mm x 30mm) | 30 | DR-12V-60W |
| | | 96 | 100-240VAC | 8.0 | 6.5″ x 2.4″ x 1.4″ (165mm x 60mm x 35mm) | 20 | DR-12V-96W |
| | 24 VDC | 96 | 100-240VAC | 4.0 | 6.5″ x 2.4″ x 1.4″ (165mm x 60mm x 35mm) | 20 | DR-24V-96W |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# LED TRANSFORMERS

2 Years

IP54
Suitable for use in damp locations

Triac/Phase-Cut Dimmable

DR-xxV-60W-HW-V2

DR-xxV-150W-HW-V2

FEATURES
Only 60W Drivers are Class 2/Class II Certified
IP65 - Suitable for Wet Locations (Driver Only)
IP54 - Suitable for Damp Locations (with Junction Box)
Operating Temperature: -40°C to 45°C
Efficiency: ~85%

| SERIES | CASE PACK QTY | POWER (WATTS) | INPUT VOLTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT | DIMENSIONS (DRIVER) | DIMENSIONS (JUNCTION BOX) | MODEL NUMBER |
|---|---|---|---|---|---|---|---|---|
| HARDWIRE ELECTRONIC TRANSFORMERS | 20 | 60W | 100-130V ~1.0A MAX 50/60HZ | 12V | 100-5000mA | 7.15"x 2.44"x 1.4" (181.5mm x 62mm x 35mm) | 9.80"x 3.86"x 1.50" (249mm x 98mm x 38mm) | DR-12V-60W-HW-V2 |
| | | | | 24V | 100-2500mA | 7.15"x 2.44"x 1.4" (181.5mm x 62mm x 35mm) | 9.80"x 3.86"x 1.50" (249mm x 98mm x 38mm) | DR-24V-60W-HW-V2 |
| | 10 | 150W | 100-130V ~2.4A MAX 50/60HZ | 12V | 100-12500mA | 9.2"x 3.0"x 2.0" (234mm x 76mm x 51mm) | 15.25"x 3.25"x 2.5" (390mm x 83mm x 58mm) | DR-12V-150W-HW-V2 |
| | | | | 24V | 100-6250mA | 9.2"x 3.0"x 2.0" (234mm x 76mm x 51mm) | 15.25"x 3.25"x 2.5" (390mm x 83mm x 58mm) | DR-24V-150W-HW-V2 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

2 Years

Suitable for use in dry locations

NOT Dimmable

CERTIFIED

12V Hardwire Electronic Transformer
DR-12V-12W

12V Hardwire Electronic Transformer
DR-12V-25W

FEATURES
Operating Temperature: -5°C to 45°C
Efficiency: ~85%

| SERIES | CASE PACK QTY | POWER (WATTS) | INPUT VOLTAGE | OUTPUT VOLTAGE | DIMENSIONS | MODEL NUMBER |
|---|---|---|---|---|---|---|
| 12 VOLT HARDWIRE ELECTRONIC TRANSFORMERS | 25 | 12 | 90-130VAC | 12V | 3.00" x 1.5" x 1.25" (76mm x 38mm x 32mm) | DR-12V-12W |
| | 25 | 25.2 | 90-264VAC | 12V | 3.30" X 2.24" X 1.16" (84mm x 57mm x 29.5mm) | DR-12V-25W |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# LED TRANSFORMERS

DR-347-240-50W
DR-347-120-25W

DR-347-240-100W
DR-347-120-60W

GUARANTEE
2 Years

IP44
Suitable for use in damp locations

FEATURES
Fits in 4" Junction Box
Operating Temperature: -20°C to 50°C
Efficiency: 89%

| SERIES | CASE PACK QTY | INPUT VOLTAGE | OUTPUT | POWER (WATTS) | DIMENSIONS | MODEL NUMBER |
|---|---|---|---|---|---|---|
| STEP DOWN TRANSFORMERS | 10 | 347V | 240VAC | 50 | 1.57" x 1.69" x 1.30" (40mm x 43mm x 33mm) | DR-347-240-50W |
| | | | | 100 | 3.15" x 1.65" x 1.50" (80mm x 42mm x 38mm) | DR-347-240-100W |
| | | | 120VAC | 25 | 1.57" x 1.69" x 1.30" (40mm x 43mm x 33mm) | DR-347-120-25W |
| | | | | 60 | 3.15" x 1.65" x 1.50" (80mm x 42mm x 38mm) | DR-347-120-60W |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# LED ACCESSORIES

RGB Controller with Remote

RGBW Controller with Remote
RGBWCTRL-144W-RF

RGB Controller with Remote
RGBCTRL-24V-216W-RF

RGB Amplifier
RGBAMP-12V

RGBW Amplifier
RGBWAMP-12V

GUARANTEE
2 Years

Suitable for use in dry locations

FEATURES
Operating Temperature: -30°C to 55°C

| SERIES | MAX POWER (WATTS) | INPUT/OUTPUT VOLTAGE | MAX OUTPUT CURRENT (A) | DIMENSIONS | MODEL NUMBER |
|---|---|---|---|---|---|
| RGB RF CONTROLLER WITH REMOTE | 144 | 12VDC | 6 /CH | 3.94" x 2.4" x 0.98" (100mm x 60mm x 25mm) | RGBCTRL-144W-RF |
| RGB RF CONTROLLER WITH REMOTE | 216 | 24VDC | 6 /CH | 3.35" x 1.77" x 0.91" (85mm x 45mm x 23mm) | RGBCTRL-24V-216W-RF |
| RGBW RF CONTROLLER WITH REMOTE | 144 | 12VDC | 6 /CH | 3.35" x 1.77" x 0.87" (85mm x 45mm x 22mm) | RGBWCTRL-144W-RF |
| RGB AMPLIFIER | 144 | 12VDC | 6 /CH | 3.94" x 2.4" x 0.98" (100mm x 60mm x 25mm) | RGBAMP-12V |
| RGB AMPLIFIER | 144 | 24VDC | 6 /CH | 3.94" x 2.4" x 0.98" (100mm x 60mm x 25mm) | RGBAMP-24V |
| RGBW AMPLIFIER | 288 | 24VDC | 6 /CH | 3.19" x 2.52" x 0.95" (81mm x 64mm x 24mm) | RGBWAMP-24V |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# THE ARANI GUARANTEE

We've been told our no-questions-asked warranty is the best on the market.

Each product has an associated warranty period, shown on the catalog and product spec sheet. Most of our products carry a 5 year warranty. If you encounter any issues with products you've purchased from us within the product's warranty period, we'll replace it or issue you a refund at our discretion. It's as simple as that.

Our lawyers need us to add: this warranty does not cover products subject to accident, neglect, abuse, misuse, or acts of God. But we can't remember the last time we turned down a warranty claim.

Because at Arani, we believe You Deserve Great Service.

# A Word from the President

Sean Arani
Founder & President

This is an industry of bullies and we are proud not to be one.

First and foremost, we believe You Deserve Great Service. When you choose Arani, we would like to believe it's because we're the right partner for you. You have your reasons for giving us the opportunity to serve you, and we will always respect and appreciate them.

Today, I would like to make you a promise. Our company is growing thanks to your continued support, and while I don't have a crystal ball to see what Arani will look like in 10, 20, 30 years, I promise you this: We are always going to obsessively think about how we can serve you better, because we believe You Deserve Great Service. We would never lock you in with hard volume quotas, or threaten to raise your prices if you choose to work with someone else. Only you should have a say about what happens with your business.

We understand the challenges some of you may face from your existing suppliers of electrical boxes if you start to use ours. If it's not realistic for your business right now for any reason, we understand. However, if at all possible, we hope you will consider us for projects that do not affect your day-to-day volumes. We intend to one day have a line complete enough to cover all your electrical boxes needs.

RESIDENTIAL

COMMERCIAL

INDUSTRIAL

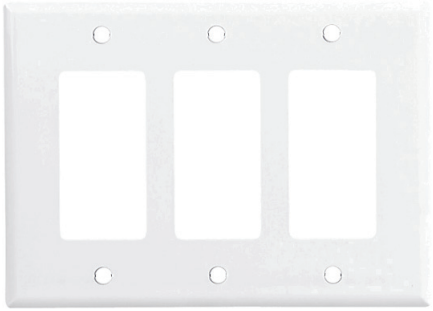

# ELECTRICAL BOXES & ACCESSORIES

ED-OJB-54151-L

ED-OJB-54151-LA

ED-OJB-54151-K

ED-OJB-54171-K

ED-OJB-54171-L

ED-OJB-56111

1 Year

FEATURES

Standard Sizes

Robust Metal Construction
(Sheet Thickness: 1/16")

A handling fee of 15% applies
if not ordered by case pack quantities

| SERIES | SIZE | TYPE | CASE PACK QTY | MODEL NUMBER |
|---|---|---|---|---|
| OCTAGONAL JUNCTION BOXES | Ø 4" | CLAMPS | 50 | ED-OJB-54151-L |
| | | CLAMPS | 50 | ED-OJB-54151-LA |
| | | 1/2" & 3/4" KNOCKOUTS | 50 | ED-OJB-54151-K |
| | | 2 1/8" WITH CONCENTRIC KNOCKOUTS | 50 | ED-OJB-54171-K |
| | | 2 1/8" WITH CLAMPS | 50 | ED-OJB-54171-L |
| | | PANCAKE BOX | 50 | ED-OJB-56111 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# ELECTRICAL BOXES & ACCESSORIES

ED-SJB-52151-K

ED-SJB-52171-K

ED-SJB-72171-K

GUARANTEE
1 Year

FEATURES

Standard Sizes

Robust Metal Construction
(Sheet Thickness: 1/16")

A handling fee of 15% applies
if not ordered by case pack quantities

| SERIES | SIZE | TYPE | CASE PACK QTY | MODEL NUMBER |
|---|---|---|---|---|
| SQUARE JUNCTION BOXES | 4" WIDE X 1 1/2" DEEP | SHALLOW WITH KNOCKOUTS | 50 | ED-SJB-52151-K |
| | 4" WIDE X 2 1/8" DEEP | KNOCKOUTS | 50 | ED-SJB-52171-K |
| | 4 11/16" WIDE X 2 1/8" DEEP | KNOCKOUTS | 40 | ED-SJB-72171-K |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

ED-NGU-1110

ED-NGU-2020

ED-NGB-2104-LLE

GUARANTEE
1 Year

ED-NGB-2104-LLE2



ED-NGB-2104-LLE3

ED-NGB-2104-LLE4

FEATURES

Standard Sizes

Robust Metal Construction (Sheet Thickness: 1/16")

A handling fee of 15% applies if not ordered by case pack quantities

| SERIES | SIZE | TYPE | CASE PACK QTY | MODEL NUMBER |
|---|---|---|---|---|
| SWITCH/ UTILITY BOXES | 1 7/8" DEEP | NON-GANGABLE UTILITY BOX WITH KNOCKOUTS | 50 | ED-NGU-1110 |
| | | NON-GANGABLE UTILITY BOX WITH KNOCKOUTS | 50 | ED-NGU-2020 |
| | 2 1/2" DEEP | 1 GANG DEVICE BOX WITH CLAMPS | 50 | ED-NGB-2104-LLE |
| | | 2 GANG DEVICE BOX WITH CLAMPS | 10 | ED-NGB-2104-LLE2 |
| | | 3 GANG DEVICE BOX WITH CLAMPS | 10 | ED-NGB-2104-LLE3 |
| | | 4 GANG DEVICE BOX WITH CLAMPS | 10 | ED-NGB-2104-LLE4 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# ELECTRICAL BOXES & ACCESSORIES

ED-GGB-1100-L

ED-GGB-1102-L

ED-GGB-1104-L

ED-GGB-1104-LH

1 Year

ED-GGB-1104-LHA

ED-GGB-1304-LH

ED-GGB-1004-LH

FEATURES

Standard Sizes

Robust Metal Construction
(Sheet Thickness: 1/16")

A handling fee of 15% applies
if not ordered by case pack quantities

| SERIES | SIZE | TYPE | CASE PACK QTY | MODEL NUMBER |
|---|---|---|---|---|
| SWITCH/ UTILITY BOXES | 1 1/2" DEEP | SHALLOW DEVICE BOX | 50 | ED-GGB-1100-L |
| | 2" DEEP | DEVICE BOX | 30 | ED-GGB-1102-L |
| | 2 1/2" DEEP | DEVICE BOX WITH PLASTIC EARS | 50 | ED-GGB-1104-L |
| | | DEVICE BOX WITH CLAMPS | 50 | ED-GGB-1104-LH |
| | | DEVICE BOX WITH ARMOURED CLAMPS | 50 | ED-GGB-1104-LHA |
| | | "BUBBLE" BOX WITH CLAMPS | 50 | ED-GGB-1304-LH |
| | 3" DEEP | DEVICE BOX WITH CLAMPS | 50 | ED-GGB-1004-LH |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# ELECTRICAL BOXES & ACCESSORIES



ED-HVB-1204-LSSAXHV



ED-SSB-2104-LSSAX



ED-SSB-3104-LSSAX



ED-SSB-52151-KSSX

ED-SSB-54151-KSSX

ED-SSB-54151-LSSAX



ED-SSB-52171-KSSX

1 Year

FEATURES

Standard Sizes

Robust Metal Construction (Sheet Thickness: 1/16")

A handling fee of 15% applies if not ordered by case pack quantities

| SERIES | SIZE | TYPE | CASE PACK QTY | MODEL NUMBER |
|---|---|---|---|---|
| SWITCH/ UTILITY BOXES | 2 1/2" DEEP | BOX WITH CLAMPS, GANGABLE, 347V | 24 | ED-HVB-1204-LSSAXHV |
| | | NON-GANGABLE STEEL STUD BOX WITH WARPAROUND BRACKET | 24 | ED-SSB-2104-LSSAX |
| | | GANGABLE STEEL STUD "BUBBLE" BOX WITH CLAMPS | 24 | ED-SSB-3104-LSSAX |
| | 4" WIDE X 1 1/2" DEEP | STEEL STUD SHALLOW BOX WITH KNOCKOUTS | 24 | ED-SSB-52151-KSSX |
| | | STEEL STUD OCTAGONAL BOX WITH KNOCKOUTS | 32 | ED-SSB-54151-KSSX |
| | | STEEL STUD OCTAGONAL BOX WITH CLAMPS | 32 | ED-SSB-54151-LSSAX |
| | 4" WIDE X 2 1/8" DEEP | STEEL STUD BOX WITH KNOCKOUTS | 24 | ED-SSB-52171-KSSX |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# ELECTRICAL BOXES & ACCESSORIES



1 Year

ED-CWB-66

ED-CWB-820D

ED-NGB-SBEX

FEATURES

Standard Sizes

Robust Metal Construction
(Sheet Thickness: 1/16")

A handling fee of 15% applies
if not ordered by case pack quantities

| SERIES | SIZE | TYPE | CASE PACK QTY | MODEL NUMBER |
|---|---|---|---|---|
| CABLE PROTECTOR PLATE | 1 1/2" X 3" | PROTECTS WIRES BEING RUN THROUGH STUDS WHEN WIRE IS WITHIN 1 1/4" FROM EDGE OF STUD | 25 | ED-CWB-66 |
| F-CLIP SWITCH BOX SUPPORTS | STANDARD | FOR DRY WALL APPLICATION TO INSTALL DEVICE BOXES WITH PLASTIC EARS IN EXISTING WALLS WHERE BOX CAN NOT BE ATTACHED TO STUD | 100 | ED-CWB-820D |
| 1" DEEP BOX EXTENSION | 3" HIGH X 2" WIDE | 7/8" MAX MOUNTING DEPTH. | 100 | ED-NGB-SBEX |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

ED-SBC-52C13

ED-SBC-72C13



ED-SBC-52C1

ED-SBC-72C1

1 Year

ED-SBC-52C6

ED-RBC-54C1



ED-SBC-54C6

FEATURES

Standard Sizes

Robust Metal Construction
(Sheet Thickness: 1/16")

A handling fee of 15% applies
if not ordered by case pack quantities

| SERIES | SIZE | TYPE | CASE PACK QTY | MODEL NUMBER |
|---|---|---|---|---|
| SQUARE COVER | 4" WIDE | RAISED 1/2" | 100 | ED-SBC-52C13 |
| | 4 11/16" WIDE | RAISED 1/2" | 10 | ED-SBC-72C13 |
| | 4" WIDE | FULL COVER | 50 | ED-SBC-52C1 |
| | 4 11/16" WIDE | FULL COVER | 50 | ED-SBC-72C1 |
| | 4" WIDE | FULL COVER | 200 | ED-SBC-52C6 |
| ROUND COVER | Ø 4" | FULL COVER | 50 | ED-RBC-54C1 |
| | | FULL COVER | 200 | ED-SBC-54C6 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# ELECTRICAL BOXES & ACCESSORIES

ED-UBC-11C4

ED-UBC-11C5

ED-UBC-11C1

ED-UBC-11C10

ED-UBC-20C4

ED-UBC-20C5

ED-UBC-20C1

1 Year

FEATURES
Standard Sizes
Robust Metal Construction
(Sheet Thickness: 1/16")

A handling fee of 15% applies
if not ordered by case pack quantities

| SERIES | SIZE | TYPE | CASE PACK QTY | MODEL NUMBER |
|---|---|---|---|---|
| UTILITY BOX COVER | 2 3/8" WIDE | FULL COVER | 25 | ED-UBC-11C4 |
| | | SINGLE SWITCH | 25 | ED-UBC-11C5 |
| | | DUPLEX OUTLET | 25 | ED-UBC-11C1 |
| | | DECORATOR/GFCI | 25 | ED-UBC-11C10 |
| | 2 1/8" WIDE | FULL COVER | 25 | ED-UBC-20C4 |
| | | SINGLE SWITCH | 25 | ED-UBC-20C5 |
| | | DUPLEX OUTLET | 25 | ED-UBC-20C1 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

ED-NBC-4004

ED-MBC-L16

ED-MBC-L17

ED-MBC-CI-2175

ED-MBC-CI-80x

ED-STP-Sx

1 Year

FEATURES
Standard Sizes
Robust Metal/Nylon Construction

| SERIES | CASE PACK QTY | MATERIAL | TYPE | MODEL NUMBER |
|---|---|---|---|---|
| BOX CONNECTORS | 100 | NYLON | 1/2" SNAP IN | ED-NBC-4004 |
| | 50 | METAL | 1 SCREW 3/8" | ED-MBC-L16 |
| | 50 | | 1 SCREW 1/2" | ED-MBC-L17 |
| | 50 | | 3/8" DUPLEX | ED-MBC-CI-2175 |
| | 100 | | 2 SCREWS 3/8" | ED-MBC-CI-804 |
| | 50 | | 2 SCREWS 3/4" | ED-MBC-CI-806 |
| | 25 | | 2 SCREWS 1" | ED-MBC-CI-808 |
| SAFETY STAPLES | 500 | METAL | S1 | ED-STP-S1 |
| | 200 | | S2 | ED-STP-S2 |
| | 200 | | S3 | ED-STP-S3 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# ELECTRICAL BOXES & ACCESSORIES

ED-PGB-SLH-1A

ED-PGB-SLH-2A

ED-PGB-SLH-3A


ED-PWB-SLH-4A

ED-PWB-SLH-6A

ED-PGB-SLH-1

1 Year

FEATURES
Standard Sizes
Polycarbonate Plastic

| SERIES | TYPE | CASE PACK QTY | MODEL NUMBER |
|---|---|---|---|
| SWITCH/ UTILITY BOXES | 1-GANG SWITCH PLASTIC WATERPROOF WIRING BOX | 50 | ED-PGB-SLH-1A |
| | 2-GANG SWITCH PLASTIC WATERPROOF WIRING BOX | 50 | ED-PGB-SLH-2A |
| | 3-GANG SWITCH PLASTIC WATERPROOF WIRING BOX | 30 | ED-PGB-SLH-3A |
| | PLASTIC WATERPROOF WIRING BOX | 50 | ED-PWB-SLH-4A |
| | SQUARE 2-GANG SWITCH PLASTIC WATERPROOF WIRING BOX | 30 | ED-PWB-SLH-6A |
| | 1-GANG SWITCH PLASTIC WIRING BOX | 50 | ED-PGB-SLH-1 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

1 Year

ED-PEX-SLK-1

ED-PEX-SLK-2

ED-PEX-SLK-3

ED-PEX-SLK-5

| SERIES | MATERIAL | TYPE | CASE PACK QTY | MODEL NUMBER |
|---|---|---|---|---|
| SWITCH/ UTILITY BOXES | PLASTIC | 1-GANG EXTENSION RING | 25 | ED-PEX-SLK-1 |
| | | 2-GANG EXTENSION RING | 25 | ED-PEX-SLK-2 |
| | | 3-GANG EXTENSION RING | 10 | ED-PEX-SLK-3 |
| | | ROUND EXTENSION RING | 10 | ED-PEX-SLK-5 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

RÉSIDENTIEL
COMMERCIAL
INDUSTRIEL

# WIRING DEVICES

# WINGED WIRE NUTS

WINGED WIRE NUTS
(300 PER JAR,
3600 PER CASE PACK)

CABLE TIES
(100 PACK)

1 Year

Winged Wire Nuts ONLY

CERTIFIED

FEATURES
Standard Size

| SERIES | SIZE | TYPE | CASE PACK QTY | MODEL NUMBER |
|---|---|---|---|---|
| WINGED WIRE NUTS (JAR OF 300, CASE PACK OF 3600) | 8 TO 22 AWG | COMMONLY USED FOR CONNECTING 2 TO 3 #14 OR #12 WIRES | 12 JARS (3600 PCS) | TC-8-22-TAN-300-V1 |

| SERIES | LENGTH | MAX TENSION | COLOUR | UV RESISTANT? | ORDERING CODE |
|---|---|---|---|---|---|
| CABLE TIES (100 PACK) | 8″ | 40LBS | BLACK | YES | TW8-40-BK-100-V1 |
| | | | WHITE | NO | TW8-40-WH-100-V1 |
| | 12″ | 50LBS | BLACK | YES | TW12-50-BK-100-V1 |
| | | | WHITE | NO | TW12-50-WH-100-V1 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# SLIDING LED DIMMERS

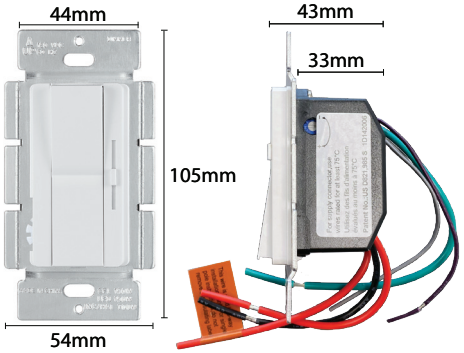


1 Year

Suitable for use in dry locations

Dimmable

CERTIFIED

FEATURES
Operating Temperature: 0°C to 40°C
Compatible with all dimmable Arani LED products without flicker

LED Sliding Dimmer
Single Pole / 3 Way
DM1-150W-SL-3-WH-V2

0-10V LED Sliding Dimmer
Single Pole / 3 Way
DM10-720W-SL-3-WH-V1

| SERIES | POWER (WATTS) FOR LED | POWER (WATTS) FOR INCANDESCENT | VOLTAGE | FINISH | MODEL NUMBER |
|---|---|---|---|---|---|
| SINGLE-POLE / 3 WAY LED SLIDING DIMMER V2 | 150W | 600W | 120V AC 60HZ | WHITE | DM1-150W-SL-3-WH-V2 |
| 0-10V SINGLE-POLE / 3 WAY LED SLIDING DIMMER | 720W | - | 120-277V AC 60HZ | | DM10-720W-SL-3-WH-V1 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# TAMPER-RESISTANT GFCI OUTLETS

GFCI Outlet
GF1-xxA-TR-WH-V1

2 Years

Suitable for use in dry locations

CERTIFIED

FEATURES
Auto Self-Testing
Polycarbonate Body with Copper Contacts
Rated Voltage: 125VAC 60Hz
Tripping Threshold: 5mA
Tripping Time: <25ms
Surge Current:
6000V / 3000A 6000V / 10KA
Electric Strength:
Pressure Resistance 1500V 60Hz 1min
Insulation Resistance: >50MQ (DC500V)
Short-Circuit Current: 10KA
Functioning Temperature: -35°C to 66°C

| SERIES | FINISH | RATED WORKING CURRENT | ORDERING CODE |
|---|---|---|---|
| TAMPER-RESISTANT GFCI OUTLETS | WHITE | 15A | GF1-15A-TR-WH-V1 |
| | | 20A | GF1-20A-TR-WH-V1 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# TAMPER-RESISTANT OUTLETS

Outlet
OU1-xxA-TR-WH-V1

2 Years

Suitable for use in dry locations

CERTIFIED

FEATURES
Polycarbonate Body with Copper Contacts
Rated Power: 1875W
Rated Voltage: 125VAC 60Hz
Withstand Voltage: 1500VAC
Fire Rating of Rubber Shell: UL94 V2
Functioning Temperature: -20°C to 60°C

| SERIES | FINISH | RATED WORKING CURRENT | ORDERING CODE |
|---|---|---|---|
| TAMPER-RESISTANT OUTLETS | WHITE | 15A | OU1-15A-TR-WH-V1 |
| | | 20A | OU1-20A-TR-WH-V1 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

Switch
Single Pole: SW1-15A-1-WH-V1
3 Way: SW1-15A-3-WH-V1

2 Years

Suitable for use in dry locations

CERTIFIED
Single-Pole Version ONLY

3-Way Version ONLY

FEATURES
Polycarbonate Body with Copper Contacts
Rated Power: 1875W
Rated Voltage: 125VAC 60Hz
Rated Working Current: 15A
Withstand Voltage: 1500VAC
Fire Rating of Rubber Shell: UL94 V2
Functioning Temperature: -20°c to 60°c

| SERIES | FINISH | TYPE | ORDERING CODE |
|---|---|---|---|
| SWITCHES | WHITE | SINGLE-POLE | SW1-15A-1-WH-V1 |
| | | 3-WAY | SW1-15A-3-WH-V1 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# MOTION SENSOR SWITCHES

1 Year

Suitable for use in dry locations

MS1-15A-W-NL-WH-V1

MS1-15A-W-L-WH-V1

Motion Sensor Switch
MS1-15A-W-NL-WH-V1
MS1-15A-W-L-WH-V1

FEATURES
Polycarbonate
180° detection Range
Rated Power: 1875W
5sec-5min Hold Time

| SERIES | FINISH | TYPE | ORDERING CODE |
|---|---|---|---|
| MOTION SENSOR SWITCHES | WHITE | WITH NEUTRAL | MS1-15A-W-NL-WH-V1 |
| | | WITHOUT NEUTRAL | MS1-15A-W-L-WH-V1 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

# DESIGNER WALL PLATES


ED-SI8831N-WH-PL


ED-SI8832N-WH-PL


ED-SI8833N-WH-PL


ED-SI8834N-WH-PL


ED-8831-WH-PL

ED-8832-WH-PL


ED-8833-WH-PL


ED-8834-WH-PL

CERTIFIED

FEATURES
Standard Size
Robust Plastic Body

| SERIES | MATERIAL | FINISH | TYPE | SIZE | MODEL NUMBER |
|---|---|---|---|---|---|
| DECORATIVE WALL PLATE | PLASTIC | WHITE | SCREWLESS | 1 GANG | ED-SI8831N-WH-PL |
| | | | | 2 GANG | ED-SI8832N-WH-PL |
| | | | | 3 GANG | ED-SI8833N-WH-PL |
| | | | | 4 GANG | ED-SI8834N-WH-PL |
| | | | STANDARD | 1 GANG | ED-8831-WH-PL |
| | | | | 2 GANG | ED-8832-WH-PL |
| | | | | 3 GANG | ED-8833-WH-PL |
| | | | | 4 GANG | ED-8834-WH-PL |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm. For latest stock information, please consult arani.ca.

RESIDENTIAL

COMMERCIAL

INDUSTRIAL

# PROTECTIVE SUPPLIES

Surgical Mask
PP-FM-GN-V1

KN95 Mask
PP-FM-KN95-V1

| SERIES | DESCRIPTION | SIZE | BOX QTY | MODEL NUMBER |
|---|---|---|---|---|
| SURGICAL MASK | 3-PLY, NON-STERILE, MEET THE ASTM F2100 LEVEL 1 STANDARD REQUIRED BY CNESST | ONE SIZE | 50 | PP-FM-GN-V1 |
| KN95 MASK | EXCELLENT ALTERNATIVE TO N95 MASKS | ONE SIZE | 5 | PP-FM-KN95-V1 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm (EST). For latest stock information, please consult arani.ca.

# MADE IN CANADA HAND SANITIZER

Made in Canada

K-SAN 70% Alcohol-Based Hand Sanitizer - 4L (Pump Included)
PP-HS-LQ-4L-V1

Made in Canada

Manoxx Chlorine-Based Hand Sanitizer - 4L (Foaming Pump Included)
PP-HS-LQ-4L-V2

Wipeco 75% Alcohol-Based Gel Hand Sanitizer - 500ML
PP-HS-GL-500ML-V1

FEATURES

Made in Canada (4L)

On Health Canada's list of hand sanitizers with evidence for use against COVID-19

| SERIES | TYPE | FORMAT | OPTIONAL CASE PACK QTY | MODEL NUMBER |
|---|---|---|---|---|
| K-SAN 70% ALCOHOL-BASED HAND SANITIZER | LIQUID | 4L | 4 | PP-HS-LQ-4L-V1 |
| MANOXX CHLORINE-BASED HAND SANITIZER | FOAM | 4L | 4 | PP-HS-LQ-4L-V2 |
| WIPECO 75% ALCOHOL-BASED HAND SANITIZER | GEL | 500ML | 30 | PP-HS-GL-500ML-V1 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm (EST). For latest stock information, please consult arani.ca.

# MADE IN CANADA SURFACE DISINFECTANT



Made in Canada

Myosan TB
Surface Disinfectant - 4L
LQ-4L-V1

FEATURES

Made in Canada (Disinfectants)

On Health Canada's list of disinfectants with evidence for use against COVID-19

| SERIES | FORMAT | OPTIONAL CASE PACK QTY | MODEL NUMBER |
|---|---|---|---|
| MYOSAN TB SURFACE DISINFECTANT | 4L | 4 | LQ-4L-V1 |

Products with this icon are in stock, and ship out on the same day when ordered before 3pm (EST). For latest stock information, please consult arani.ca.

# THE ARANI GUARANTEE

We've been told our no-questions-asked warranty is the best on the market.

Each product has an associated warranty period, shown on the catalog and product spec sheet. Most of our products carry a 5 year warranty. If you encounter any issues with products you've purchased from us within the product's warranty period, we'll replace it or issue you a refund at our discretion. It's as simple as that.

Our lawyers need us to add: this warranty does not cover products subject to accident, neglect, abuse, misuse, or acts of God. But we can't remember the last time we turned down a warranty claim.

Because at Arani, we believe You Deserve Great Service.