


⚠ WARNING

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION


- To prevent personal injury or product damage only licensed electricians should install.
- To avoid electric shock or component damage disconnect power before attempting installation or servicing.
- To prevent product malfunction and/or electrical shock this product must be properly grounded.
- This luminaire is designed to operate in ambient temperatures ranging from -40°C to 45°C.
- Input voltage range: 120-347Vac. If the input voltage exceeds this range, it may cause light failure. Please make sure to operate under the correct input voltage.
- Suitable for wet locations.
- Please keep the light fixture away from any corrosive substance. Please clean it with damp or dry cloth.
- Install the fixture ONLY with the orientation shown below, with the LEDs facing down.

1

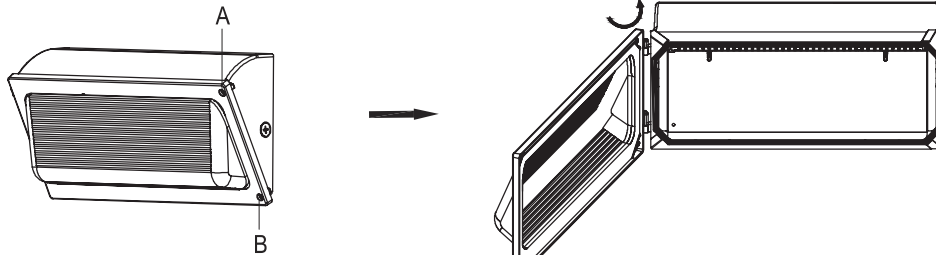


Loosen the 2x M5 screws (A/B) and open the fixture.

2

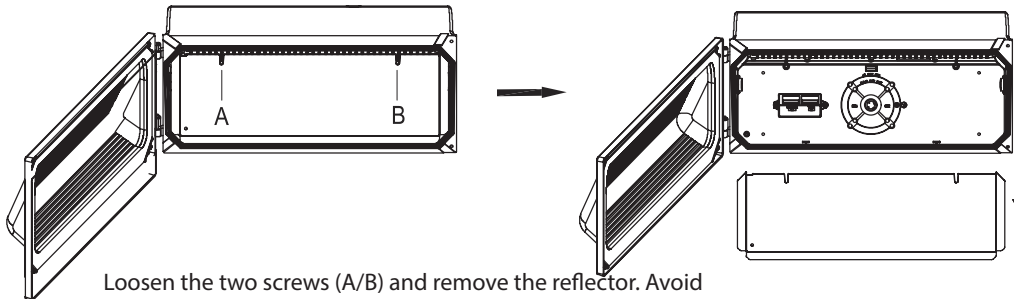


Loosen the two screws (A/B) and remove the reflector. Avoid touching the reflector surface with bare hands.

3

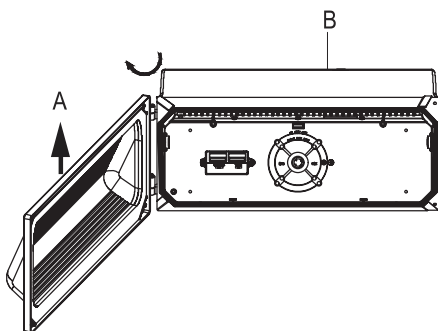


Separate part A and B and set part A aside.

4

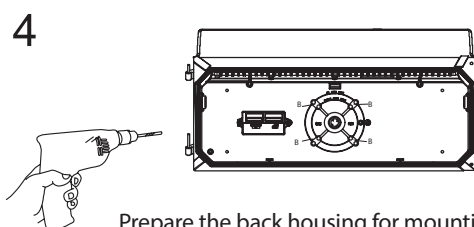


Prepare the back housing for mounting by drilling or knocking out the appropriate hole. DO NOT PUT HOLES IN OTHER PLACES THAN THOSE MARKED AS A AND B.



Unscrew the 1/2" screw if needed.

5

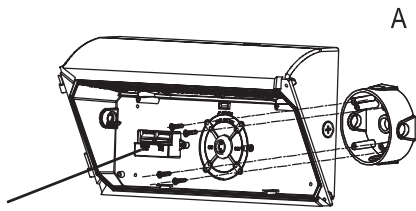


Power and CCT selection

- 5.1 Fix the back housing to the junction box.
- 5.2 Connect the wires as per the wiring diagram.
- 5.3 Select the desired colour temperature and power.

A


B



wall

- 5.1 Fix the back housing on the wall.
- 5.2 Connect the wires as per the wiring diagram.
- 5.3 Select the desired colour temperature and power.

6

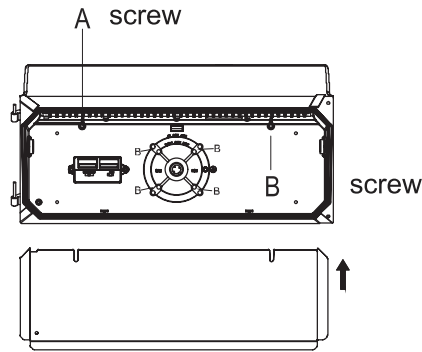


Put back the reflector and tighten the 2 screws.

A screw

screw

7

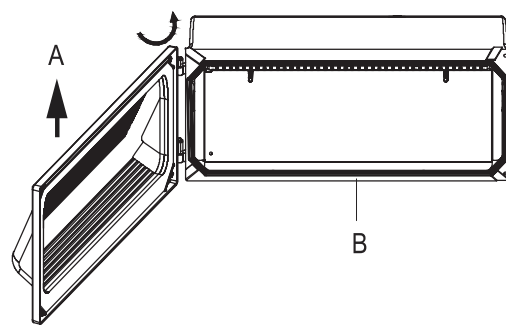


Put part A back onto the hinge of part B. Check the hinge for secure. Evenly tight the 2x M5 screws.

A


B

8




REMOVE THE WATERPROOF PLUGS.

Connect to main electricity and check if the unit is working properly.

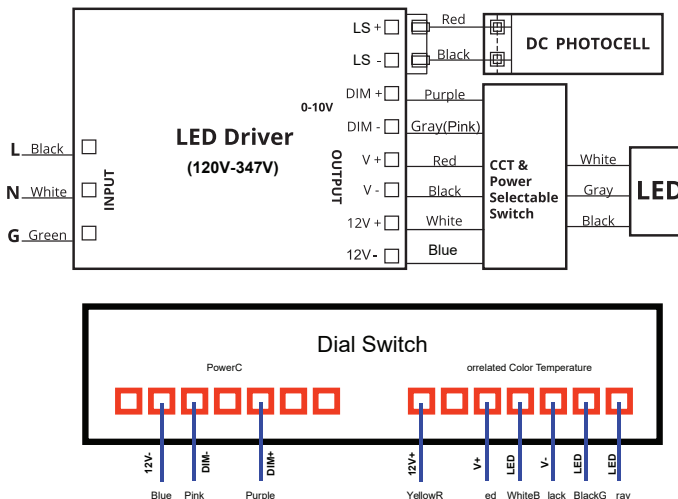


Photocell desinstallation

1




1. Loosen the two M5 screws.

2

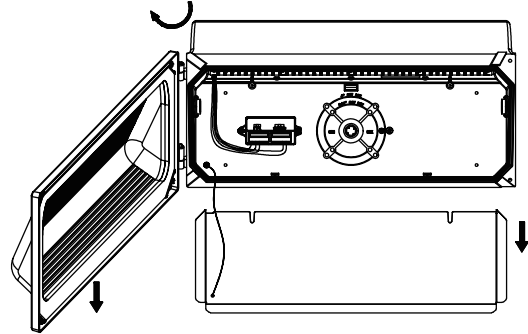


2. Remove the glass cover & the reflector.

3

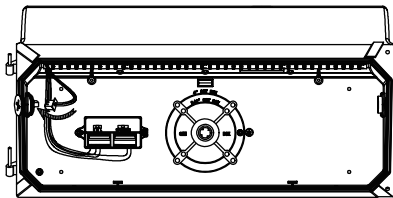


3. Detach the connector, with the black and red wires, from the photocell by pulling out both wires.

4

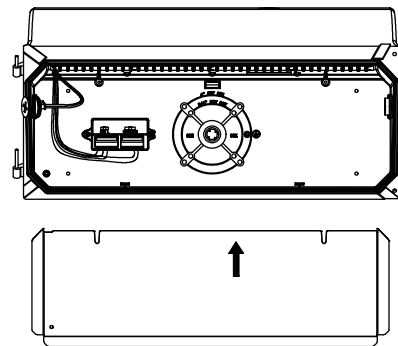


4. Put the reflector back on.

5

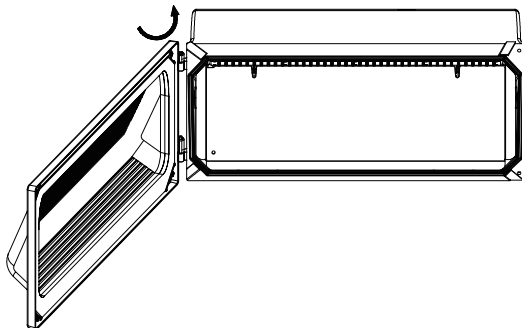

5. Reinstall the glass cover frame. REMOVE THE WATERPROOF PLUGS.

6



6. Tighten evenly back the two M5 screws and check whether the fixture works properly.