

ARANI

Installation Instructions

LED Panels V4


WARNING: Turn off power at fuse or circuit breaker box before installation and maintenance. Fixture must be installed according to Local Electric Code and Local Building Code. Installation must be handled by a qualified licensed electrician understanding all electrical requirements involved.

Avoid fire or electrical shock: ALWAYS disconnect/terminate power to a fixture prior to installation or replacement. Failure to do so may result in shock and/or serious injury. The operating voltage of this product is 120-347VAC. An installer must verify operating voltage of the fixture prior to installation.

Do not expose direct to water, it is not waterproof. Only suitable for dry and damp location.


Do not connect gimbal module to any other driver except the one packed together.

Do not connect multiple panels to one driver and don't disassemble the panel.

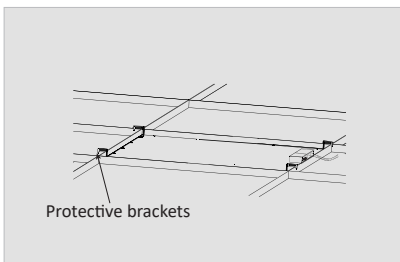


Recessed/Drop-Ceiling Installation

1. Remove the False Ceiling.
2. Install standard L16 cable connector.
3. Put the panel on the ceiling. Connect all wires on junction box separately.
4. Use the protective brackets for safety as shown.

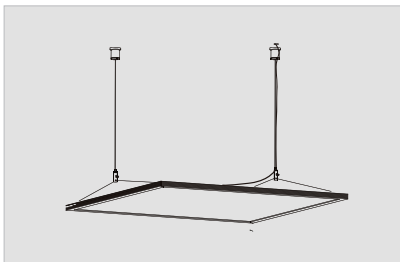

Suspended Installation

1. Drill two holes in the ceiling, and put the anchor into the holes. Then insert the suspension cables and screw them down.
2. Connect LED Panel and adjust the suspension cables to balance the panel horizontally.

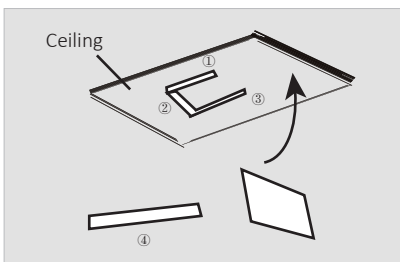

Surface Mount

1. Connect 3 sides of the surface mount kit with screws.
2. Install the surface mount kit onto the ceiling.
3. Put the panel into the surface mount kit.
4. Install the last side of the surface mount kit to finish installation.