

PAGE 1: INSTALLATION - CL-24W-60W-VAR-V6


 **WARNING**

- Makes sure you have the proper tools and materials to complete the installation before attempting to install the luminaire.
- To prevent personal injury or product damage, disconnect the Electrical supply power at the services panel (fuse or circuit breaker box) before wiring the fixture or performing any maintenance.
- Only qualified electricians should install this luminaire and all electrical and grounded connections MUST be in accordance with the National Electrical Code and the Canadian Electrical Code, and any applicable local code requirements and ordinances.
- Any change or modifications not expressly approved by the party responsible for compliance could void the authority to operate the equipment and the warranty.
- All wiring connections should be compatible with the fixture. To prevent product malfunction and/or electrical shock, the product must be properly grounded.
- Do not expose to direct water. The fixture is not waterproof. Only suitable for damp locations.
- Do not connect the light to any other driver than the one packed together.
- Do not connect multiple lights to one driver and don't disassemble the fixture.
- Please make sure to operate under the correct input voltage. If the input voltage exceeds this range, it may cause light failure.
- This fixture is designed to operate in ambient temperatures ranging from -40 °C to 40 °C. Using it in temperatures outside this range will reduce the lifespan.


| | |
|------------------|---------------------------|
| Model Number | CAN12R0060W-MV-DDKDSAD-V6 |
| Power Selectable | 24W/36W/47W/60W |
| Rated Current | 0.05Aac |
| Input Voltage | 120-347Vac |
| Frequency | 50/60Hz |

INSTALLATION INSTRUCTIONS


Step 1: Loosen and remove the side M4 screws which used to fix the mounting plate.

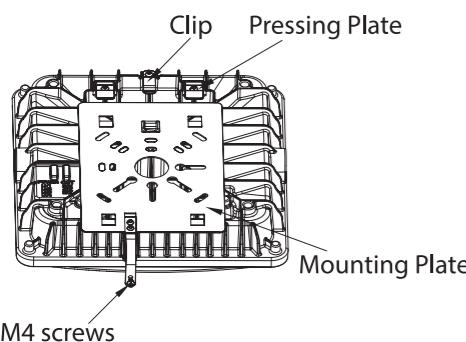


Step 2: Fix the mounting plate to the ceiling with the screws.

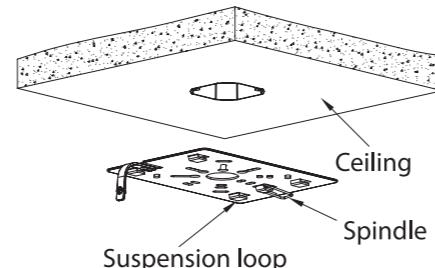

Step 3: Connect the clip from the fixture to the spindle of the mounting plate to make sure the fixture will not slip and fall. Connect the line voltage to the wires coming out from the fixture as shown in the wiring diagram. Push the pressing plate into the suspension loop on the mounting plate.

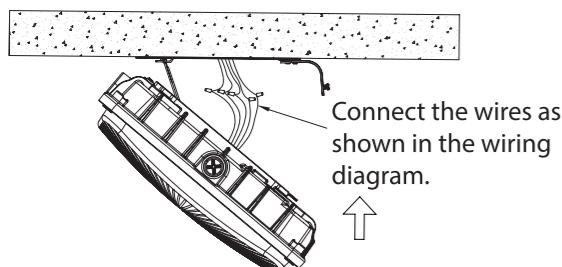


Step 4: Lock the M4 screws to finish the installation.

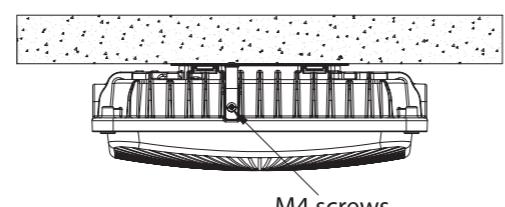

PAGE 2: INSTALLATION - CL-24W-60W-VAR-V6


OPTIONAL PENDANT WITH 3/4" CONDUIT

Step 1: Connect the line voltage to the wires coming out of the fixture as shown in the wiring diagram.
Step 2: Screw the fixture to the 3/4" conduit to complete the installation.

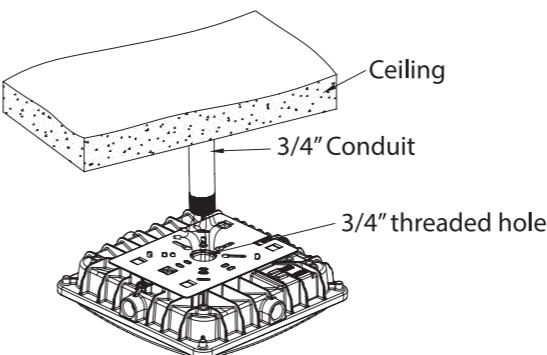

POWER AND CCT SELECTION

Adjust the dial switch to the desired colour temperature and power.
Instructions as follow:

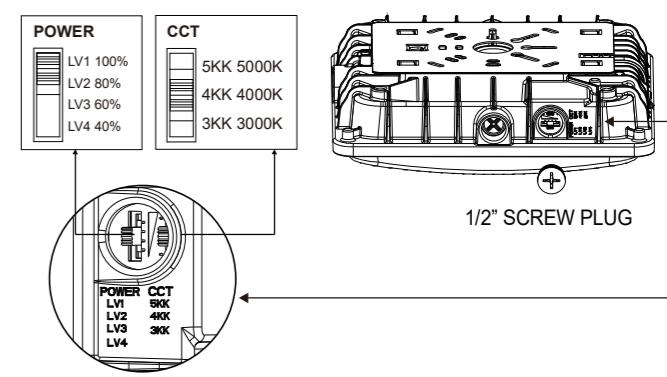

WIRING DIAGRAM

Note: Two dimming wires are in the driver box

