



GET YOUR PRODUCTS FAST
Arani is committed to same day shipping on orders before 3pm*.

Date:

Project:

Prepared for:

Type:

Comments:

LED STRIPS & EXTRUSIONS

AVAILABLE BY INCH

OUR 3-STEP PROCESS



1) CONTACT US

Tell us a bit about your project.



2) LET US TAKE CARE OF IT

We'll recommend the best products for you, cut them to custom lengths, and deliver them straight to you.



3) PLUG-AND-PLAY

Simply install and enjoy your LED strips!

LED STRIP OPTIONS

- Indoor LED Strip (Pages 2-4)
- Weatherproof LED Strip (Pages 2-4)
- Dot-Free LED Flexitube (Pages 5-6)
- Driverless 120V LED Strip (Page 7)

ALUMINUM EXTRUSIONS OPTIONS

- Square Extrusion (Page 8)
- V-Shape Extrusion (Page 8)
- Signature LUNAR Recessed Extrusion (Page 9)



Under Cabinet Lighting
Indoor LED Strip (4000K)
+ Square Extrusion



Cove Lighting in Ceiling
Indoor LED Strip (3000K)
+ V Shape Extrusion



Accent Lighting in Shelves
Indoor LED Strip (3000K)
+ V Shape Extrusion



Accent Lighting behind Media Stand
Indoor LED Strip (6000K)
+ Square Extrusion



Accent Lighting at Reception
Indoor LED Strip (6000K)



Lighting at Bar
Weatherproof LED Strip (RGBW)



Lighting on Patio
LED Flexitube (3000K)



Cove Lighting in Ceiling
120V LED Strip (4000K)



Recessed Lighting in Wall
LUNAR Recessed Extrusion
+ 120W Indoor LED Strip



Recessed Lighting in Wall
LUNAR Recessed Extrusion
+ 120W Indoor LED Strip



GET YOUR PRODUCTS FAST
Arani is committed to same day shipping on orders before 3pm*.

Date:

Project:

Prepared for:

Type:

Comments:

LED STRIPS

DIMMABLE | AVAILABLE BY INCH



3 Years



Lifetime
25 000 hours



Low Voltage
Magnetic Dimmer
Dimmable



SPECIFICATIONS

Available in Custom Sizes by the Inch
3M Peel Off Adhesive Tape for Easy Installation
Color Rendering Index: >90
Operating Temperature: -10°C to 40°C
Max Length per Run: 10 Meters (~32ft)

AVAILABILITY

Indoor / Outdoor
24W / 36W / 48W / 72W / 120W
3000K / 4000K / 6000K / R / G / B / RGBW
12V DC / 24V DC



*This icon indicates a STOCK item:
Look for this Same Day Shipping icon below in
'Ordering Information' for products that ship
same day (orders must be placed before 3pm)
from Montreal, Quebec / Calgary, Alberta




Full spec File Available on Request



INDOOR LED STRIP
Suitable for Dry Locations (IP20)
(ST-xxW-xxK-I-IN)



IP20
Suitable for
Dry Locations

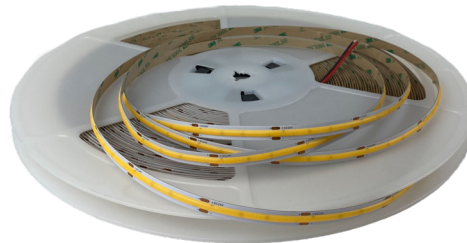

COB LED STRIP
Suitable for Dry Locations (IP20)
(STCOB-xxW-xxK-I-IN)



IP20
Suitable for
Dry Locations




OUTDOOR WEATHERPROOF LED STRIP
Suitable for Wet Locations (IP65)
(STxxxx-xxW-xx-IN)














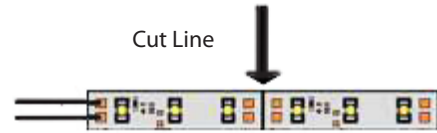


















IP65
Suitable for
Wet Locations

Cut Line




ORDERING INFORMATION







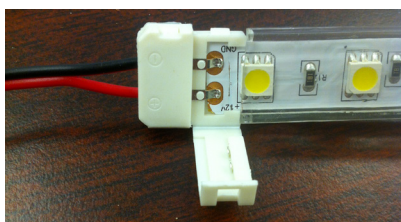








SERIES	POWER (WATTS)	INPUT VOLTAGE	POWER/FT (WATTS)	LUMENS /FT	LED QTY (SMD)	WIDTH	THICKNESS	MIN. CUT DISTANCE	COLOR TEMP	MODEL NUMBER			
INDOOR LED STRIPS (BY INCH)	24	12VDC	1.5	150	300 x 3528	8mm	2mm	50mm	3000K	ST-24W-30K-I-IN			
	72	12VDC	4.5	400	300 x 5050	12mm		50mm	6000K	ST-24W-60K-I-IN			
		24VDC	4.5	400	300 x 5050	12mm		100mm	3000K	ST-72W-30K-I-IN			
									4000K	ST-72W-40K-I-IN			
		120	24VDC	7.5	500	1200 x 3014		10mm	25mm	3000K	ST-72W-30K-24V-I-IN		
	4000K									ST-72W-40K-24V-I-IN			
	OUTDOOR WEATHERPROOF LED STRIPS (BY INCH)	24	12VDC	1.5	150	300 x 3528		10mm	5.5mm	50mm	3000K	ST3528-24W-WW-IN	
											6000K	ST3528-24W-CW-IN	
RED							ST3528-24W-R-IN						
GREEN							ST3528-24W-G-IN						
BLUE							ST3528-24W-B-IN						
36		12VDC	2.25	230	150 x 5050	15mm	6.6mm	105mm	3000K	ST5050-36W-WW-IN			
									6000K	ST5050-36W-CW-IN			
									RGB	ST5050-36W-RGB-IN			
48		12VDC	3	330	600 x 3528	10mm	5.5mm	25mm	3000K	ST3528-48W-WW-IN			
									4000K	ST3528-48W-40K-IN			
									6000K	ST3528-48W-CW-IN			
									RED	ST3528-48W-R-IN			
									GREEN	ST3528-48W-G-IN			
72		12VDC	4.5	400	300 x 5050	15mm	5.5mm	50mm	3000K	ST5050-72W-WW-IN			
						15mm	6mm		4000K	ST5050-72W-40K-IN			
									6000K	ST5050-72W-CW-IN			
	RGB								ST5050-72W-RGB-IN				
	24VDC	4.5	400	300 x 5050	15mm	6mm	100mm	3000K	ST5050-72W-RGB-IN				
					15mm	6mm		3000K	ST-72W-30K-24V-IN				
								4000K	ST-72W-40K-24V-IN				
COB LED STRIPS	48	24VDC	3.3	480	N/A	8mm	N/A	50mm	3000K	ST-72W-RGBW-24V-IN			
									4000K	STCOB-48W-30K-24V-I-IN			
										STCOB-48W-40K-24V-I-IN			

ACCESSORIES



ARANI's revolutionary grip-on connectors serve as an efficient alternative to soldering. Soldering is still recommended for a stronger connection.

SERIES	COMPATIBLE WITH	CONNECTOR TYPE	APPLICATION	MODEL NUMBER
3528 STRIP CONNECTORS	ST3528 LED STRIPS ST-24W-xxK-I STRIPS	2 WIRES	STRIP TO WIRE	ST-C-2-3528 
		NO WIRES	STRIP TO STRIP	ST-C-N-3528 
		L SHAPE	STRIP TO STRIP (CORNERS)	C-L-3528 
5050 STRIP CONNECTORS	ST5050 LED STRIPS ST-72W-xxK-I STRIPS	2 WIRES	STRIP TO WIRE	ST-C-2-5050 
		NO WIRES	STRIP TO STRIP	ST-C-N-5050 
		L SHAPE	STRIP TO STRIP (CORNERS)	C-L-5050 
RGB STRIP CONNECTORS	RGB LED STRIPS	4 WIRES	STRIP TO WIRE	ST-C-4 
		NO WIRES	STRIP TO STRIP	ST-C-N-RGB 
		L SHAPE	STRIP TO STRIP (CORNERS)	C-L-RGB 
LED STRIP END CAP	ALL STRIPS	END CAP	SEALING STRIP END	ST-EC-C 
LED STRIP INSTALLATION BRACKET	ALL STRIPS	BRACKET	SECURING STRIPS	AC-ST-IB 
INSTALLATION KITS	ST3528 LED STRIPS ST-24W-xxK-I STRIPS	10 INSTALLATION BRACKETS, 2 CONNECTORS (3528 2 WIRES), 4 END CAPS		ST-C-3528-KIT 
	ST5050 LED STRIPS ST-72W-xxK-I STRIPS	10 INSTALLATION BRACKETS, 2 CONNECTORS (5050 2 WIRES), 4 END CAPS		ST-C-5050-KIT 



GET YOUR PRODUCTS FAST
Arani is committed to same day shipping on orders before 3pm*.

Date:

Project:

Prepared for:

Type:

Comments:

FLEXITUBE UNIFORM LIGHTING

IP65 | NO SPOTS



2 Years



Lifetime
25 000 hours



IP65
Suitable for use in
wet locations



Dimmable



CERTIFIED



SPECIFICATIONS

Uniform Light Output (No Spots)

3M Peel Off Adhesive Tape for Easy Installation

Flexible Silicone Finish

Color Rendering Index: >80

Operating Temperature: -50°C to 40°C

Compatible with Square Extrusions

Max Length per Run: 32FT

Only Available By Inch

AVAILABILITY

5W

3000K / 4000K

24VDC



*This icon indicates a STOCK item:

Look for this Same Day Shipping icon below in

'Ordering Information' for products that ship

same day (orders must be placed before 3pm)

from Montreal, Quebec / Calgary, Alberta

Shipping speed may vary based on order size




Full IES File Available on Request


ORDERING INFORMATION



Flexitube
FT-05W-xxK

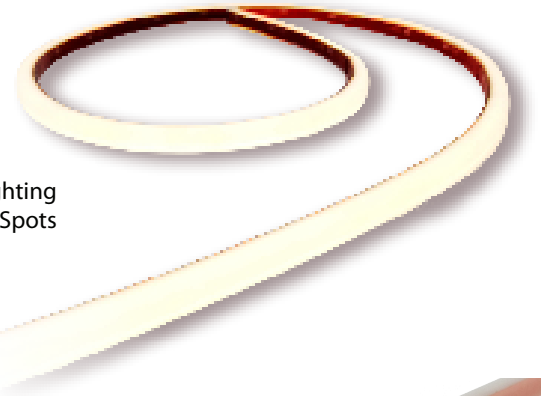


Uniform Lighting
with No Spots

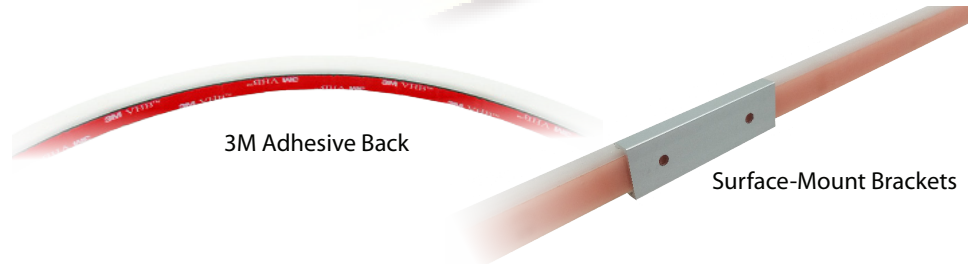


3M Adhesive Back

Surface-Mount Brackets


DIMENSIONS




FT-05W-xxK-IN



FT-05W-RGB-IN



Brackets
(regular Flexitube)



Brackets
(RGB Flexitube)


SERIES	INPUT VOLTAGE	POWER/FT (WATTS)	EQUIVALENT TO (WATTS)	COLOR TEMP	LUMENS/FT	WIDTH	THICKNESS	MODEL NUMBER
FLEXITUBE	24VDC	5	12.5	3000K	425	0.5"	0.5"	FT-05W-30K-IN
				4000K	425	0.5"	0.5"	FT-05W-40K-IN
				RGB	160	0.62"	0.62"	FT-05W-RGB-IN

COMPATIBLE ACCESSORIES



Remote and RGB Controller

RGBCTRL-24V-216W-RF

SERIES	MAX POWER (WATTS)	INPUT/OUTPUT VOLTAGE	MAX OUTPUT CURRENT (A)	DIMENSIONS	MODEL NUMBER
RGB RF CONTROLLER WITH REMOTE	288	24V DC	6/CH	4.92" x 1.3" x 0.79" (125mm x 33mm x 20mm)	RGBCTRL-24V-216W-RF 



120V LED STRIP

DRIVERLESS



2 Years



Lifetime
25 000 hours



IP65
Suitable for use in wet locations



SPECIFICATIONS

Input Voltage: 120VAC
Cuttable every 10mm (~4")
Max Length per Run: 150ft (~45.7m)
Length per Roll: 150ft (~45.7m)
Color Rendering Index: >80
Operating Temperature: -40°C to 40°C
Available in Custom Sizes by the Inch


AVAILABILITY

3W
3000K / 4000K
120VAC



*This icon indicates a STOCK item:

Look for this Same Day Shipping icon below in 'Ordering Information' for products that ship same day (orders must be placed before 3pm) from Montreal, Quebec / Calgary, Alberta

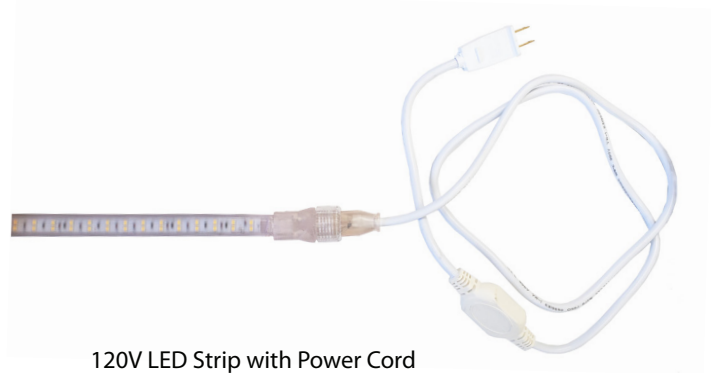

120V LED Strip with Power Cord
ST-120V-3W-xxK-V2 + ST-C-120V-PC5-V2

CAUTION - ELECTRIC SHOCK HAZARD

Installation must be done by a certified electrician with knowledge of this product. Risk of fire and electric shock - do not cut or modify the product. Any modification to the product (including but not limited to: cutting the product or rewiring the product) is done at your own risk, and voids the limited warranty. Arani recommends using our Custom Cutting service to receive this product pre-cut by the inch. Arani is not responsible for any installations made outside of our Custom Cutting service.




ORDERING INFORMATION

SERIES	INPUT VOLTAGE	WIDTH	POWER/FT (WATTS)	LUMENS/ FT	MIN. CUT DISTANCE	COLOR TEMP	MODEL NUMBER	ORDERING CODE
--------	---------------	-------	------------------	------------	-------------------	------------	--------------	---------------



ACCESSORIES	APPLICATION	MODEL NUMBER
120V LED STRIP END CAP	SEALING STRIP END	ST-C-120V-EC-V2
120V LED STRIP BRACKET	SECURING STRIPS	ST-C-120V-BR-V2
120V LED STRIP CONNECTORS WITH 5FT WIRE AND AC PLUG V2	POWERING STRIPS	ST-C-120V-PC5-V2

Extrusions for LED Strips

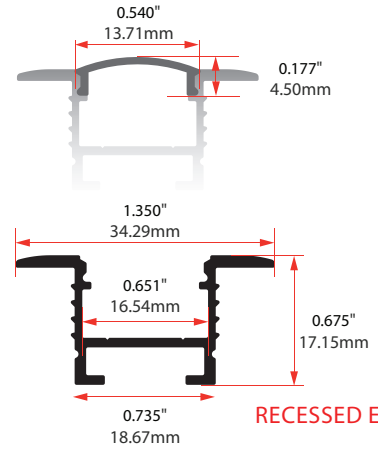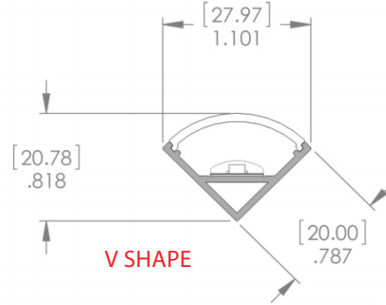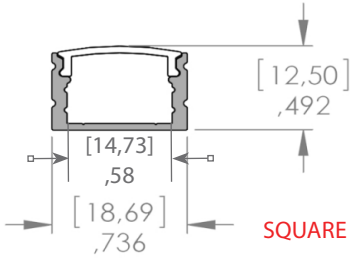

DESCRIPTION

- Arani's LED extrusions are aluminium, with your choice of three shapes, V and Square, and recessed extrusion with soft-white lenses for use with all white or coloured LED strips.

APPLICATION

- Whether for an indoor environment or a sheltered outdoor one, these extrusions are ideal for creating long runs of light up to 32 feet long, such as in hallways, alcoves, or even pendant lighting.

SPECIFICATIONS

Dimensions

- Up to 32 feet

Finish

- Aluminum

Not weatherproof.

PERFORMANCE



EXTRUSIONS

Model Number	Finish	Shape	Length
PR-S-V1	FROSTED	SQUARE	8' (96")
PR-S-V1-IN	FROSTED	SQUARE	CUSTOM
PR-S-O-V1	OPAL	SQUARE	8' (96")
PR-S-O-V1-IN	OPAL	SQUARE	CUSTOM
PR-V-V1	FROSTED	V	8' (96")
PR-V-V1-IN	FROSTED	V	CUSTOM
PR-V-O-V1	OPAL	V	8' (96")
PR-V-O-V1-IN	OPAL	V	CUSTOM
PR-RC-V1	FROSTED	RECESSED	8' (96")
PR-RC-V1-IN	FROSTED	RECESSED	CUSTOM
PR-RC-O-V1	OPAL	RECESSED	8' (96")
PR-RC-O-V1-IN	OPAL	RECESSED	CUSTOM

END CAPS

Model Number	Type	Shape
C-PR-EC-S-CL-V1	CLOSED	SQUARE
C-PR-EC-S-O-V1	OPEN	SQUARE
C-PR-EC-V-CL-V1	CLOSED	V
C-PR-EC-V-O-V1	OPEN	V
C-PR-EC-RC-CL-V1	CLOSED	RECESSED
C-PR-EC-RC-O-V1	OPEN	RECESSED

Model Number	Shape
C-PR-BR-S-V1	SQUARE
C-PR-BR-V-V1	V
C-PR-BR-RC-V1	RECESSED
C-PR-PB-S-V1	SQUARE



Brackets
(Square extrusions)



LUNAR - SIGNATURE EXTRUSION

FULLY RECESSED | DOT-FREE

SPECIFICATIONS

Dot-Free with Arani 48W & 120W LED Strips
Fully Recesses into Gyproc/Drywall
Easy Snap-In Installation with Springs
Snap-On Opal Lens
Robust Aluminium Body
Custom Lengths (MAX Straight Run: 25m)


AVAILABILITY



*This item is always IN STOCK.

Shipping speed may vary based on order size.

DIMENSIONS

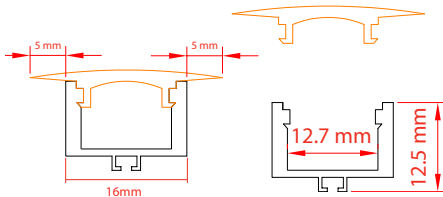


LUNAR SYSTEM



BACK VIEW

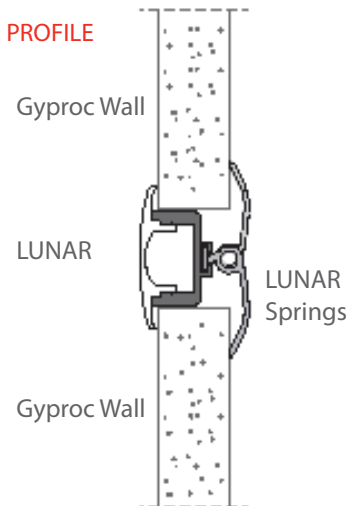


SIDE PROFILE



ORDERING INFORMATION

SERIES	LENGTH	COMPATIBLE WITH	MODEL NUMBER
LUNAR EXTRUSION	94.5"	ALL STRIPS	LU-S-15-IN 
LUNAR SPRING	-	LUNAR EXTRUSION	LU-S-15-SP 

SERIES	INPUT VOLTAGE	POWER (WATTS)	POWER/FT (WATTS)	LUMENS /FT	LED QTY (SMD)	WIDTH	MIN. CUT DISTANCE	COLOR TEMP	MODEL NUMBER
120W INDOOR STRIP	24VDC	120	7.5	500	1200 x 3014	0.47"	25mm	3000K	ST-120W-30K-I 
								6000K	ST-120W-60K-I 