

8ft LED Vapor Tight Fixture



VT96-65W-110W-VAR-V4

Date:	Project:	Comments:
Prepared for:	Type:	



CCT Selectable 3500K 4000K 5000K	Power Selectable 110W 90W 75W 65W	0-10V Dimmable	NEMA 4X	IP66	IK10	5 years	50 000 hours				
--	---	----------------	----------------	-------------	-------------	---------	--------------	--	--	--	--

Performance Specifications

Input Voltage	120-347Vac
Power	110W/90W/75W/65W
Equivalent Power	400W
Input Current	1.1A
Lumens (Up to)	15400lm@110W/12600lm@90W/ 10500lm@75W/9100lm@65W
Color Temp	3500K/4000K/5000K (Color Selectable)
Efficacy	140lm/W
Color Rendering Index (CRI)	+80
Lifetime	50,000 hours
Dimming	0-10V dimming
Total Harmonic Distortion	<15%
Surge Protection	2.5KV
Operating Temperature	-40°C to +40°C
Total Harmonic Distortion	<15%
Flame Rating	UL94-V0 Rated

Physical Specifications

Dimensions	2360mm x 108mm x 83.9mm
Net Weight	13.4lbs (6.07 kg)
Beam Angle	120°
Build Material	Polycarbonate (lens and body), Stainless Steel latches.
Environment	Wet

Ordering Specifications

Years of Warranty	5 years
Certification and Compliances	cETLus, DLC premium, NEMA 4X, IP66, IK10, NSF


Ordering Information

Orders placed by 3pm are shipped out same-day

Ordering Code	Input Voltage	Power (Selectable)	Lumens	Color Temperature (Selectable)	Model Number	DLC Product ID
VT96-65W-110W-VAR-V4	120-347Vac	110W/90W/75W/65W	15400lm@110W	3500K/4000K/5000K	VPT0110W-8VTADHV14PR3CK-V4A	S-Q4K1Q4 S-GPKV6C S-5R3NWW




Dimensions

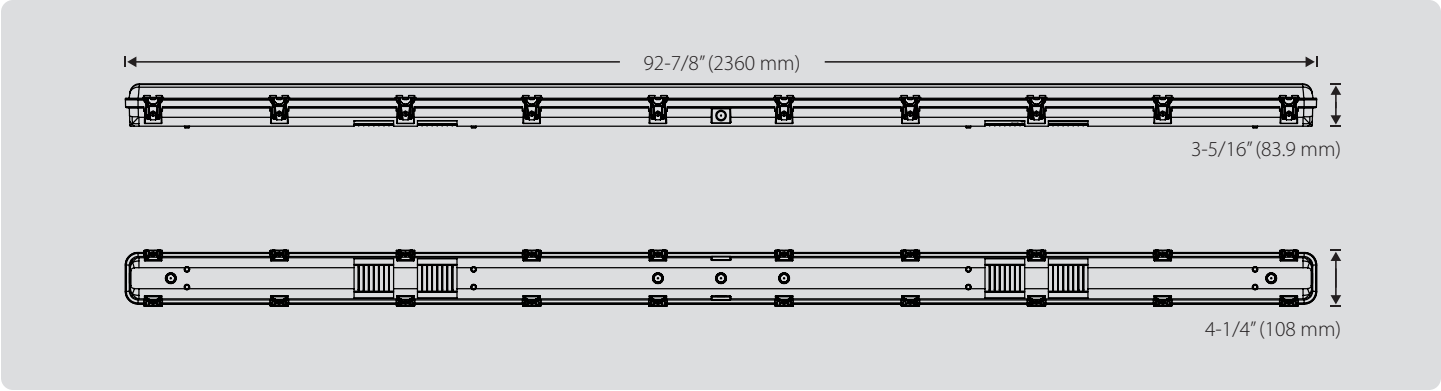


Length	Width	Height
92-7/8" (2360 mm)	4-1/4" (108 mm)	3-5/16" (83.9 mm)

Photometrics

Polar Candela Distribution

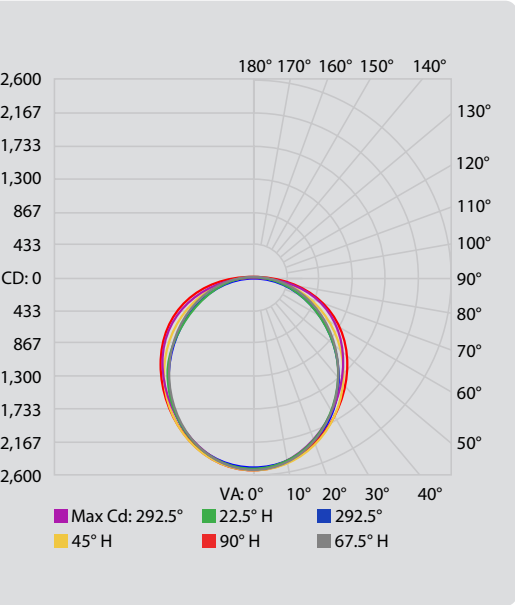


Illuminance at a Distance

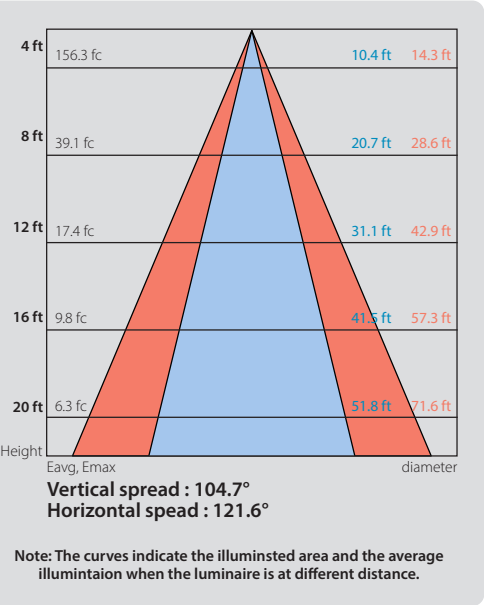

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0-30	3,875.3	25.3%
0-40	6,316.5	41.3%
0-60	11,151.7	72.9%
60-90	3,596.7	23.5%
70-100	2,005.6	13.1%
90-120	466.8	3.1%
0-90	14,748.4	96.5%
90-180	542.0	3.5%
0-180	15,290.4	100%

Additional Accessories

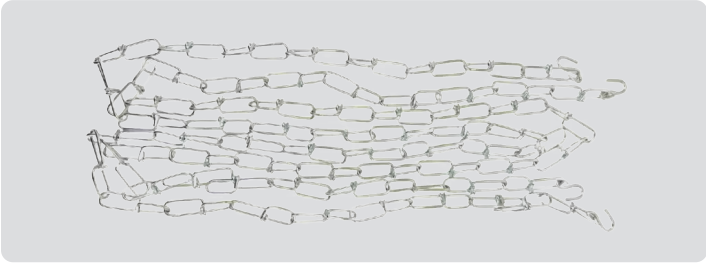

Suspension Chain

VT-AC-S
(Sold Separately)



Microwave Motion Sensor

LS48-MWS-V1
(Sold Separately)

