


Non-Dimmable LED Plug-in Drivers




DR-12V-30W-V2 DR-24V-30W-V2
DR-12V-60W-V2 DR-24V-60W-V2
DR-12V-96W-V2 DR-24V-96W-V2

Date:	Project:
Prepared for:	Type:
Comments:	

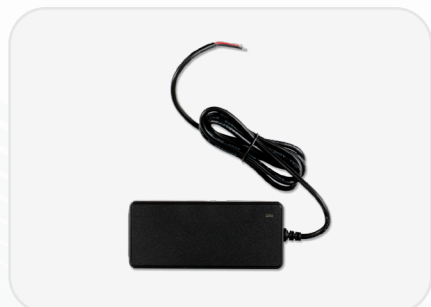

Our non-dimmable LED plug-in drivers take a universal 100-240Vac input and deliver a steady 12Vdc or 24Vdc output, from 30W to 96W. They are DOE Level VI efficient and cULus listed, and come with 4 ft AC and DC cords for quick plug-and-play installation of low-voltage LED products in dry locations.

Non-Dimmable



Specifications

Input Voltage	100-240Vac
Output Voltage	12/24Vdc
Maximum Input Current	2A
Frequency	50/60Hz
Efficiency Level	VI
Class	Class 2 (except 12V 96W)
Power Factor	0.6
Lifetime	50,000 Hours
Dimming	Non-Dimmable
Maximum Efficiency	85%

Colour	Black
Material of Body	Plastic
Operating Temperature	0°C to 40°C
Storage Temperature	-40°C to 85°C
Environment	Dry
Surge Protection	L-N 1kV ; L/N-PE 2kV
Wire Size of Leads AC	18AWG
Power cord length	DC: 4ft, AC: 4ft
Type of Connector	C14

Model-Specific Differences


	DR-12V-30W-V2	DR-12V-60W-V2	DR-12V-96W-V2	DR-24V-30W-V2	DR-24V-60W-V2	DR-24V-96W-V2
Rated Power	30W	60W	96W	30W	60W	96W
Weight	0.66lbs	0.77lbs	1.26lbs	0.66lbs	0.77lbs	1.26lbs
Wire Size of Leads DC	22AWG	18AWG	16AWG	22AWG	18AWG	18AWG
Maximum Output Current	2500mA	5000mA	8000mA	1250mA	2500mA	4000mA



Non-Dimmable LED Plug-in Drivers



DR-12V-30W-V2 DR-24V-30W-V2
DR-12V-60W-V2 DR-24V-60W-V2
DR-12V-96W-V2 DR-24V-96W-V2

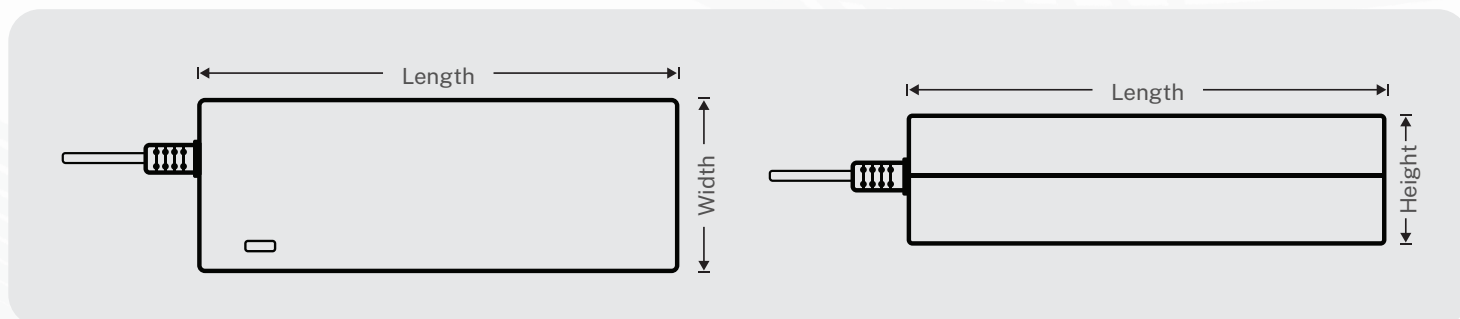

Dimensions

Ordering Code	Dimensions
DR-12V-30W-V2 / DR-24V-30W-V2	L 3-11/16" (94 mm) x W 1-13/16" (46 mm) x H 1-1/4" (32 mm)
DR-12V-60W-V2 / DR-24V-60W-V2	L 4-1/2" (114 mm) x W 1-15/16" (50 mm) x H 1-1/4" (32 mm)
DR-12V-96W-V2 / DR-24V-96W-V2	L 6" (152 mm) x W 2-3/8" (60 mm) x H 1-1/2" (38 mm)

Ordering Information

Ordering Code	Model Number	Output Voltage	Output Wattage	Maximum Output Current
DR-12V-30W-V2	DR-12V-30W-V2	12Vcc	30W	2500mA
DR-12V-60W-V2	DR-12V-60W-V2	12Vcc	60W	5000mA
DR-12V-96W-V2	DR-12V-96W-V2	12Vcc	96W	8000mA
DR-24V-30W-V2	DR-24V-30W-V2	24Vcc	30W	1250mA
DR-24V-60W-V2	DR-24V-60W-V2	24Vcc	60W	2500mA
DR-24V-96W-V2	DR-24V-96W-V2	24Vcc	96W	4000mA

