


Altum Linear Light

SU-AL-VAR-BK-V2
SU-AL-VAR-SL-V2
SU-AL-VAR-WH-V2

Date:	Project:	Comments:
Prepared for:	Type:	

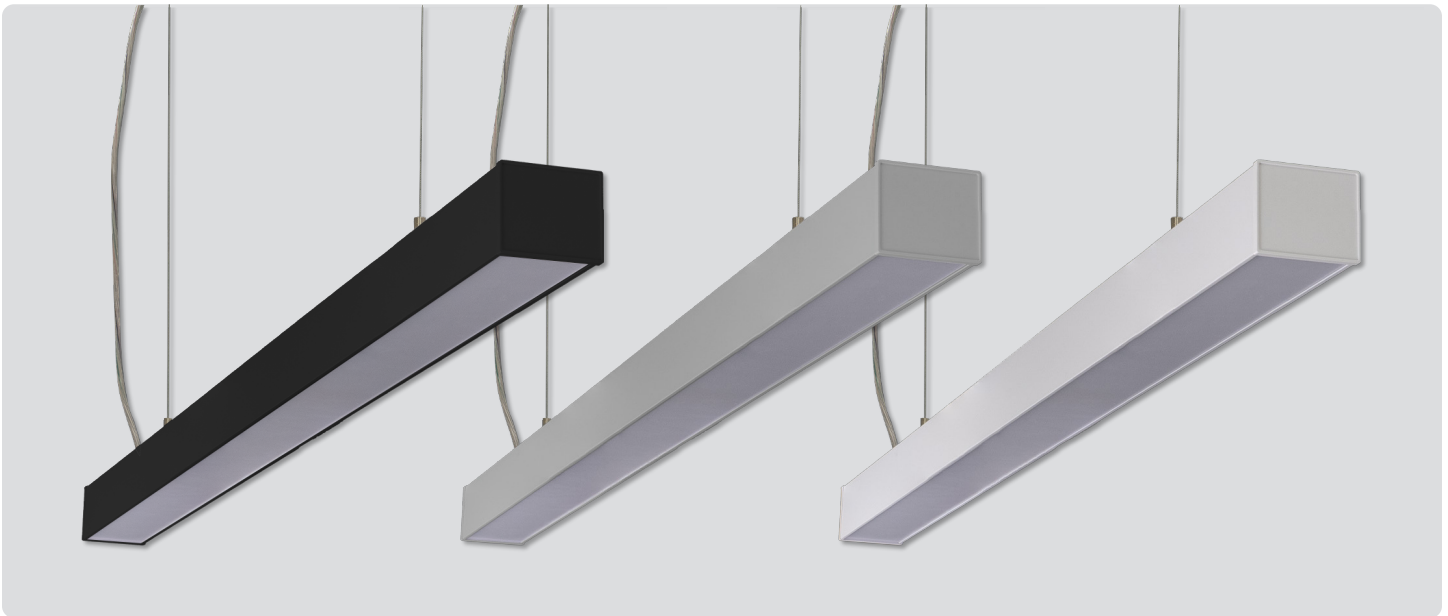

CCT Selectable
3000K | 4000K | 5000K

Power Selectable
28W | 34W | 42W



Performance Specifications

Input Voltage	120V-347Vac
Nominal Current	0.5Aac
Power (Selectable)	28W/34W/42W
Color Temperature (Selectable)	3000K/4000K/5000K
Lumens	3250lm@28W, 3850lm@34W, 4333lm@42W
Default Settings	CCT: 40K , Power: 42W
Dimming Type	0-10V
Beam Angle	101°
Length of Leads	5 ft
Color Rendering Index (CRI)	+80
Operating Temperature	-40 °C to +50 °C
Lifetime	50 000 Hours
Maximum connected fixtures	10 maximum

Physical Specifications

Material of Body	Die-cast aluminum
Material of Lens	Polycarbonate Lens
Product Color	Black, Silver, White
Environment	Damp

Warranty and Certifications

Years of warranty	5 years
Certifications	cETL

Ordering Information


Orders placed by 3pm are shipped out same-day

Ordering Code	Input Voltage	Power	CCT Selectable	Colour	Lumens
SU-AL-VAR-BK-V2	120V-347Vac	28W/34W/42W	3000K/4000K/5000K	Black	3250lm @ 28W
SU-AL-VAR-SL-V2				Silver	3850lm @ 34W
SU-AL-VAR-WH-V2				White	4333lm @ 42W




Dimensions

SU-AL-VAR-xx-V2

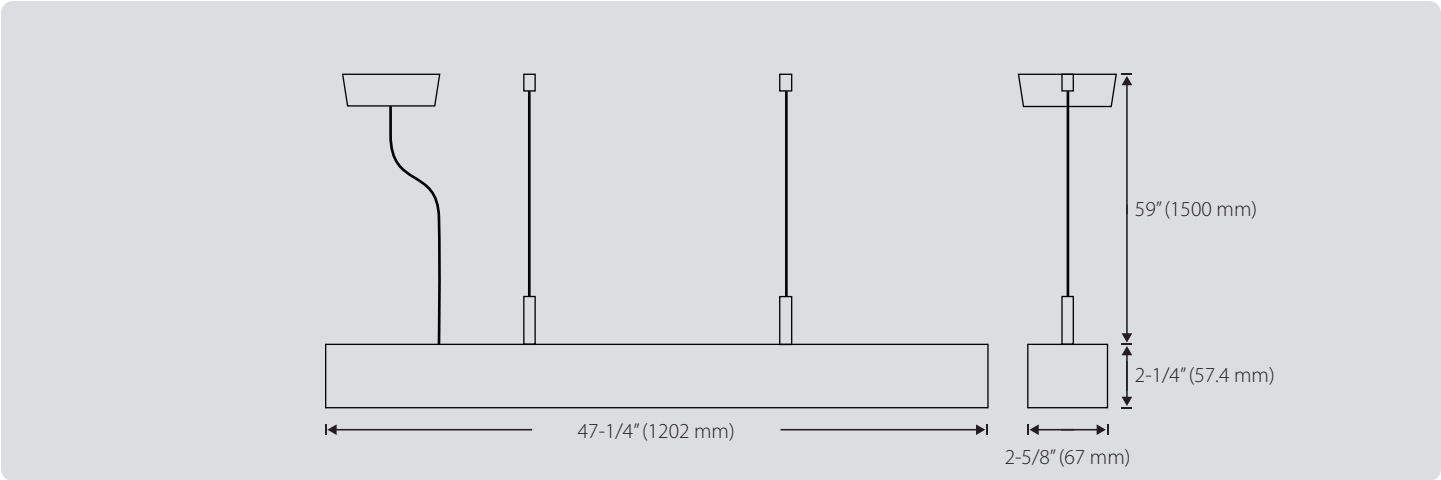


Length	Width	Height
47-1/4" (1202 mm)	2-5/8" (67 mm)	2-1/4" (57.4 mm)

Included Accessories

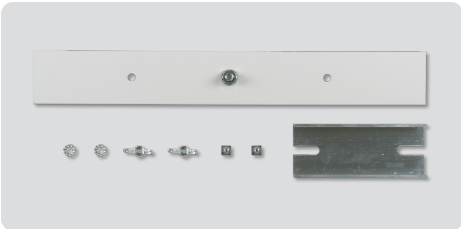

Straight Joiner

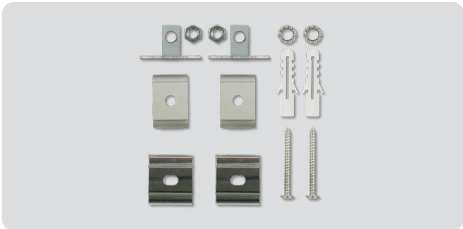


Ceiling mount parts




Adjustable Hanging System

Optional Accessories (sold separately)

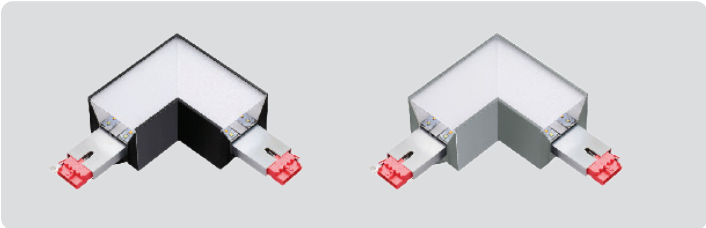

90° connector

Black Model: SU-AL-VAR-BK-C-L
Silver Model: SU-AL-VAR-SL-C-L
White Model: N/A

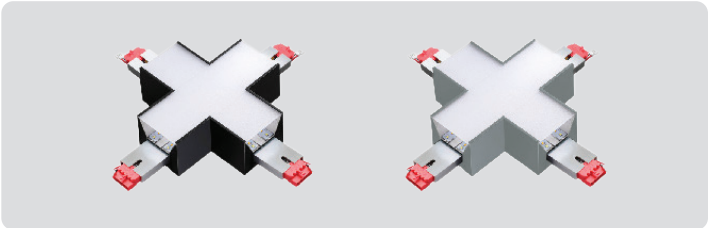

4-way connector

Black Model: SU-AL-VAR-BK-C-X
Silver Model: SU-AL-VAR-SL-C-X
White Model: N/A

Ordering Code	Name	Lumens	Dimmable	Compatible With
SU-AL-VAR-XX-C-L	90° Connector	400lm	0-10V	Altum Linear Light V2
SU-AL-VAR-XX-C-X	4-Way Connector	500lm		




Photometrics

3000K


Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	918.6	29.1%	29.1%
0-40	1,478.3	46.9%	46.9%
0-60	2,527.4	80.1%	80.1%
60-90	603.0	19.1%	19.1%
70-100	245.9	7.8%	7.8%
90-120	6.2	0.2%	0.2%
0-90	3,130.4	99.2%	99.2%
90-180	23.7	0.8%	0.8%
0-180	3,154.0	100%	100%

Illuminance at a distance

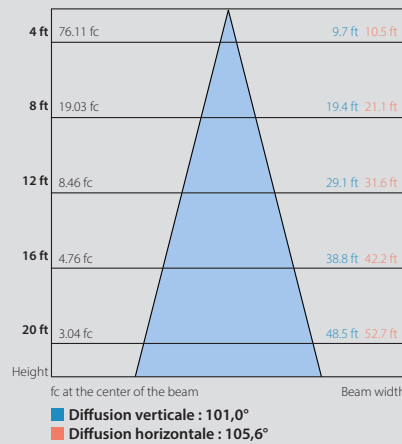

Polar Candela

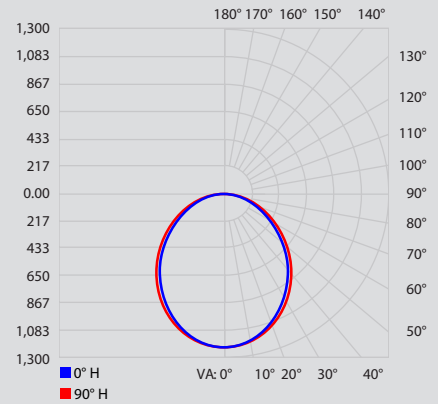


4000K


Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	989.5	29.1%	29.1%
0-40	1593.2	46.8%	46.8%
0-60	2726.2	80%	80%
60-90	652.8	19.2%	19.2%
70-100	266.7	7.8%	7.8%
90-120	7.2	0.2%	0.2%
0-90	3379.0	99.2%	99.2%
90-180	26.7	0.8%	0.8%
0-180	3405.7	100%	100%

Illuminance at a distance

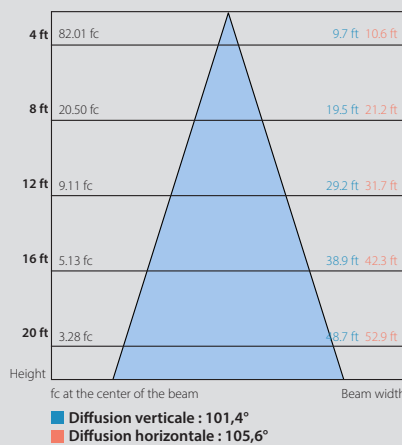

Polar Candela

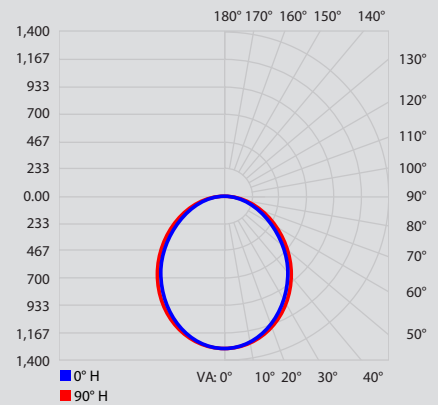


5000K

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	965.9	29%	29%
0-40	1555.9	46.7%	46.7%
0-60	2665.0	80%	80%
60-90	640.5	19.2%	19.2%
70-100	262.2	7.9%	7.9%
90-120	7.5	0.2%	0.2%
0-90	3305.5	99.2%	99.2%
90-180	26.9	0.8%	0.8%
0-180	3,332.4	100%	100%

Illuminance at a distance

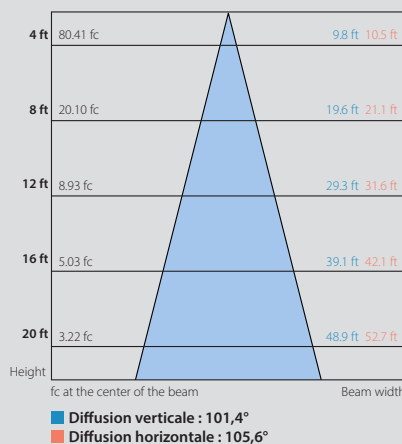

Polar Candela

