

LED Slim Panel 4"

SL4-VAR-R-WH-V4
SL4-VAR-R-BK-V4
SL4-VAR-R-BN-V4

Date:	Project:	Comments:
Prepared for:	Type:	



CCT Selectable
2700K 3000K 3500K 4000K 5000K



Performance Specifications

Power	9W
Equivalent Power	60W
Input Voltage	120Vac
Input Current	205mA
Color Temperature (CCT)	2700K / 3000K / 3500K / 4000K / 5000K
Color Rendering Index (CRI)	>80
Dimming Type	Triac Phase Cut
Beam Angle	110°
Max Lumens	680lm @ 4000K
Efficacy	Up to 75.5lm/W
Total Harmonic Distortion	<20%
Surge Protection	175Vac
Power Factor	0.95

Physical Specifications

Color Options	White, Black, Brushed Nickel
Material - Body	Aluminum
Material - Lens	PMMA
Weight	289g
Volume	271 cm ³
Cutout Size	ø4" (ø101 mm)
Mounting Type	Recessed
IC Rating	Yes
Environment	Wet
Operating Temperature	-20°C to 40°C
Wire Size	18AWG (AC), 24AWG (DC)
Lead Wires Length	4"
Light Lead Wires Length	5"
Driver Output Lead Cable Length	8"

Ordering Specifications

Years of Warranty	5 years
Certification and Compliances	cETLus, IC Rated, FCC


Ordering Information

Orders placed by 3pm are shipped out same-day

Ordering Code	Rated Power	Equivalent to	CCT (Selectable)	Max Lumen Output	Trim Colour
SL4-VAR-R-WH-V4	9W	60W	2700K / 3000K / 3500K / 4000K / 5000K	680lm @ 4000k	White
SL4-VAR-R-BK-V4					Black
SL4-VAR-R-BN-V4					Brushed Nickel



Dimensions

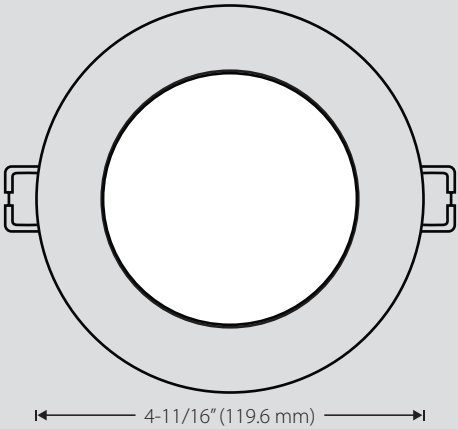


Junction Box Dimensions

Height	Width	Depth
1-5/16" (34 mm)	3-15/16" (100 mm)	2-5/8" (67 mm)


Diameter	Height
4-11/16" (119.6 mm)	1" (25.4 mm)

Photométries

Polar Candela

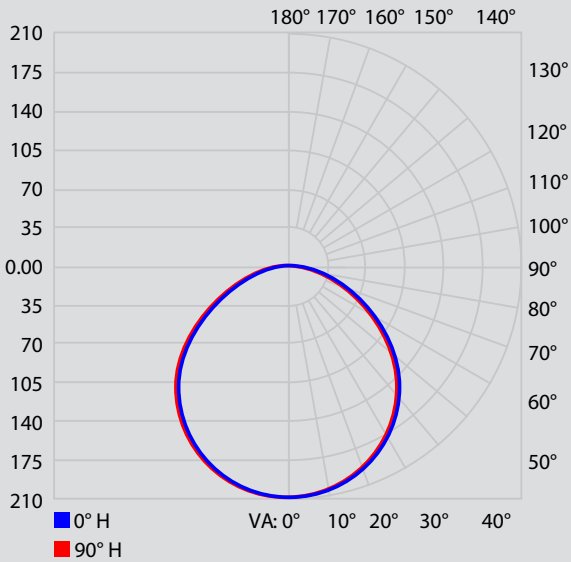

Illuminance at a distance

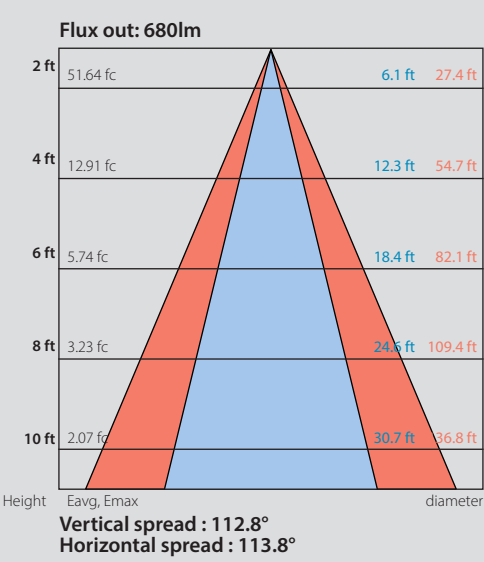

Zonal Lumen Summary


Zone	Lumens	% Lamp	% Luminaire
0-30	161.0	27.3 %	27.3 %
0-40	264.2	44.8 %	44.8 %
0-60	469.1	79.5 %	79.5 %
60-90	121.2	20.5 %	20.5 %
0-90	590.2	100 %	100 %

Lumens per CCT

2700K	3000K	3500K	4000K	5000K
580lm	620lm	670lm	680lm	660lm



Additional accessories

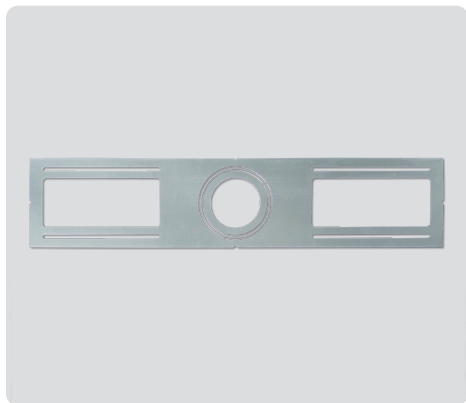

Mounting Plate

SL4-MP-R-L-V2

(Sold Separately)



Extension cable FT6

EX-SLPL-4FT

Max 5 per fixture (Sold Separately)



Vapor Barrier

SL4-VBE-V1

(Sold Separately)

