

LED Track Lighting



TL-2FT-WH-V1
TL-4FT-WH-V1
TL-6FT-WH-V1
TL-8FT-WH-V1

TL-C-LE-WH-V1
TL-CAN-WH-V1
TL-C-MJ-WH-V1
TL-C-L-WH-V1

TL-C-T-WH-V1
TL-EC-CL-WH-V1

Date:	Project:
Prepared for:	Type:
Comments:	

TL-2FT-WH-V1 / TL-4FT-WH-V1 / TL-6FT-WH-V1 / TL-8FT-WH-V1



TL-C-LE-WH-V1



TL-CAN-WH-V1




TL-C-MJ-WH-V1



TL-C-L-WH-V1



TL-C-T-WH-V1



TL-EC-CL-WH-V1



IP20



Specifications

Input Voltage	120V
Max Current	20A
Power	1920W
Connector Type	HALO
Body Material	Aluminum (Only TL-XFT-WH-V1)
Body Material	Polycarbonate (Except TL-XFT-WH-V1)
Lead Wire Size	12 AWG (Only TL-CAN-WH-V1)

Colour	White
Operating Temperature	-20°C to 45°C
Environment	Dry
IP Rating	IP20
Years of warranty	3 years
Certifications	cETLus



LED Track Lighting




TL-2FT-WH-V1
TL-4FT-WH-V1
TL-6FT-WH-V1

TL-8FT-WH-V1
TL-C-LE-WH-V1
TL-CAN-WH-V1


TL-C-MJ-WH-V1
TL-C-L-WH-V1
TL-C-T-WH-V1

TL-EC-CL-WH-V1


TL-2FT-WH-V1 L 24" (609.6 mm) TL-4FT-WH-V1 L 48" (1219.2 mm) TL-6FT-WH-V1 L 72" (1828.8 mm) TL-8FT-WH-V1 L 96" (2438.4 mm)

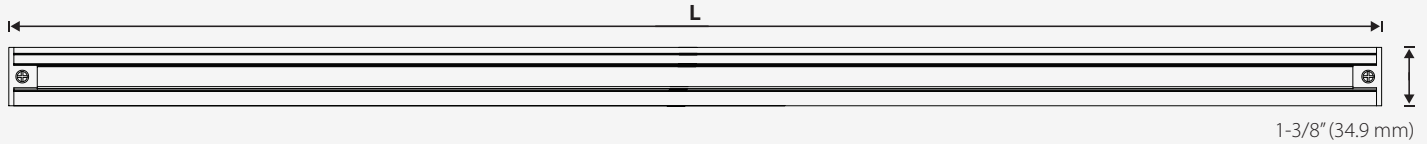


TL-C-LE-WH-V1

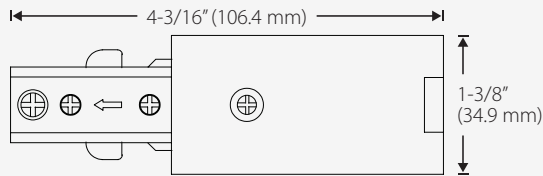


TL-CAN-WH-V1




TL-C-MJ-WH-V1

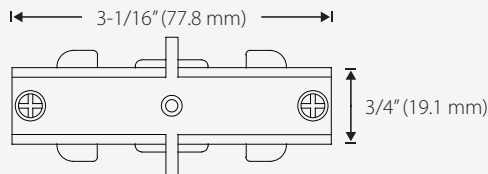


TL-C-L-WH-V1



TL-C-T-WH-V1

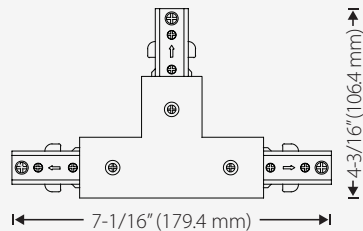

TL-EC-CL-WH-V1

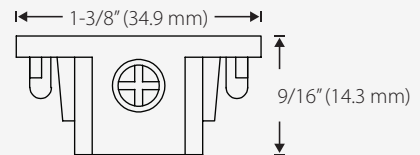

Ordering Information

Ordering Code	Name
TL-2FT-WH-V1	2FT Track with End Caps on Both Ends
TL-4FT-WH-V1	4FT Track with End Caps on Both Ends
TL-6FT-WH-V1	6FT Track with End Caps on Both Ends
TL-8FT-WH-V1	8FT Track with End Caps on Both Ends
TL-C-LE-WH-V1	Live End Connector
TL-CAN-WH-V1	Floating Canopy
TL-C-MJ-WH-V1	Mini Joiner
TL-C-L-WH-V1	L-Connector
TL-C-T-WH-V1	T-Connector
TL-EC-CL-WH-V1	End Cap

Dimensions

Ordering Code	Dimensions
TL-2FT-WH-V1	24" (609.6 mm) x 1-3/8" (34.9 mm)
TL-4FT-WH-V1	48" (1219.2 mm) x 1-3/8" (34.9 mm)
TL-6FT-WH-V1	72" (1828.8 mm) x 1-3/8" (34.9 mm)
TL-8FT-WH-V1	96" (2438.4 mm) x 1-3/8" (34.9 mm)
TL-C-LE-WH-V1	4-3/16" (106.4 mm) x 1-3/8" (34.9 mm)
TL-CAN-WH-V1	4-1/4" (108 mm) x 4-1/4" (108 mm)
TL-C-MJ-WH-V1	3-1/16" (77.8 mm) x 3/4" (19.1 mm)
TL-C-L-WH-V1	4-1/4" (108 mm) x 4-1/4" (108 mm)
TL-C-T-WH-V1	7-1/16" (179.4 mm) x 4-3/16" (106.4 mm)
TL-EC-CL-WH-V1	1-3/8" (34.9 mm) x 9/16" (14.3 mm)