

Swivel Gimbal 4"




SLFL4-VAR-R-WH-V4
SLFL4-VAR-R-BK-V4

Date:	Project:
Prepared for:	Type:
Comments:	



Introducing our new generation of Swivel Gimbal. This 9W fixture delivers up to 760 lumens with a 40° beam angle and Triac dimming, ensuring precise and flexible lighting. Built with an aluminum body and polycarbonate lens, it is cETLus, IC rated, FCC certified, and backed by a 5-year warranty for reliable performance in damp locations.

Triac Dimmable	CCT Selectable 2700K 3000K 3500K 4000K 5000K	5 years	50 000 h
cETLus	FCC	IC Rated	

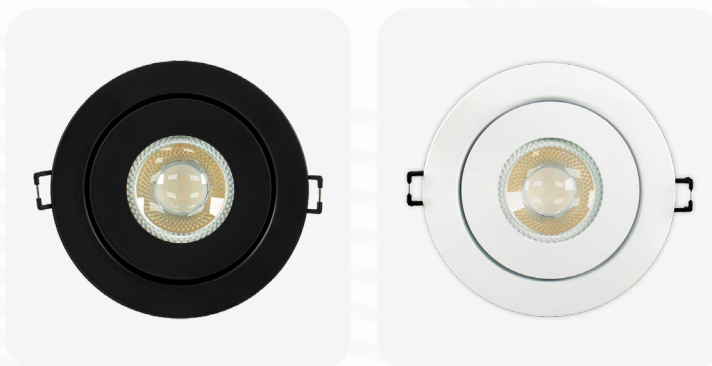

Specifications

Power	9W
Input voltage	120Vac
Input current	205mA
Power Factor	>0.94
THD (Total Harmonic Distortion)	<20%
Lumens	680lm, 700lm, 740lm, 750lm, 760lm
Color Temperature	2700K, 3000K, 3500K, 4000K, 5000K
Dimmable	Triac Dimmable
Beam Angle	40°
Color Rendering Index (CRI)	+80
Surge protection L-N	L-N, L/N-PE: 270V
Cable rating	FT6

Operating Temperature	-20°C to 40°C
Engine Leads Length	5"
Driver Leads Length	7"
Wire size of leads	AC : 18AWG ; DC : 24AWG
Material of Body	Aluminum
Material of Lens	Polycarbonate
Environment	Damp
Weight	360g
Years of warranty	5 Years
Certifications	cETLus, IC rated, FCC

Swivel Gimbal 4"




SLFL4-VAR-R-WH-V4
SLFL4-VAR-R-BK-V4

Dimensions

Fixture		
Diameter	Height	Minimum Cutout
Ø 4-15/16" (125 mm)	1-7/16" (37 mm)	ø4-1/4" (108mm)



Junction Box		
Height	Width	Depth
1-5/16" (34 mm)	3-15/16" (100 mm)	2-5/8" (67 mm)

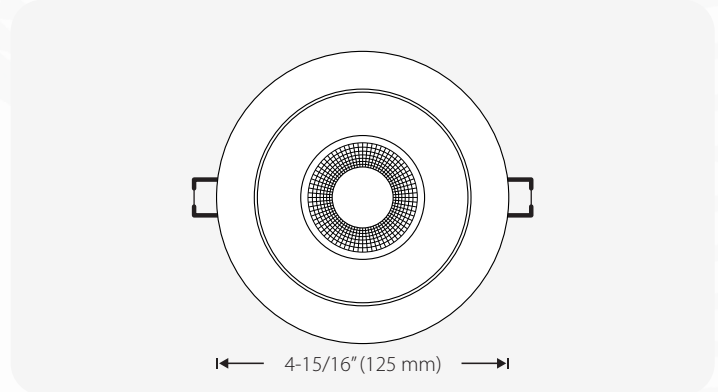

Order information

Ordering Code	Rated Power	CCT (Selectable)	Max Lumen Output	Trim Colour
SLFL4-VAR-R-WH-V4 SLFL4-VAR-R-BK-V4	9W	2700K, 3000K, 3500K, 4000K, 5000K	760lm @ 5000k	White Black

Photometrics (3000K)

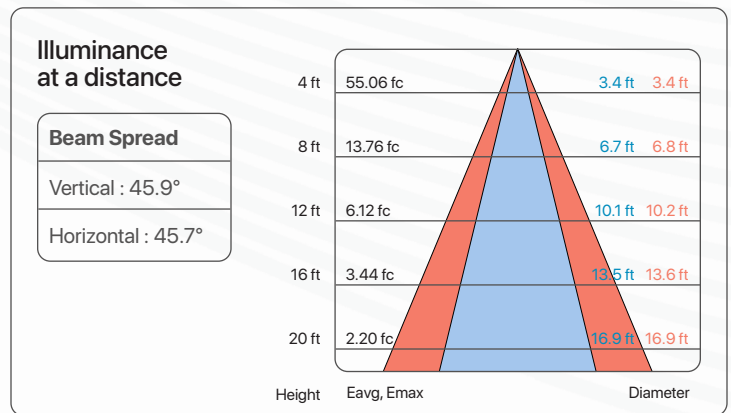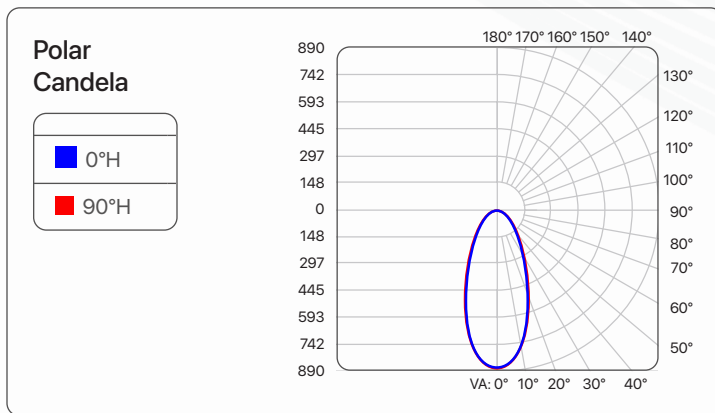

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	442.3	52.4 %	52.4 %
0-40	592.7	70.2 %	70.2 %
0-60	783.9	92.8 %	92.8 %
60-90	60.5	7.2 %	7.2 %
0-90	844.4	100 %	100 %

Lumens per CCT

2700K	3000K	3500K	4000K	5000K
680lm	700lm	740lm	750lm	760lm