

4FT LED T8 TUBE


T48T8-18W-40K-V10
T48T8-18W-50K-V10




Date:	Project:
Prepared for:	Type:
Comments:	



Introducing our new 4ft LED Tube V10. Ideal for retrofitting fluorescent fixtures in commercial and industrial spaces, this tube uses Type B (direct wire) installation — simply bypass the ballast and wire directly to line voltage. It delivers up to 2200 lumens at 18W, runs on a wide 120–347Vac input, and is cETLus certified for reliable performance. Designed for dry locations, it provides 50,000 hours of illumination backed by a 5-year warranty.



The ballast needs to be removed

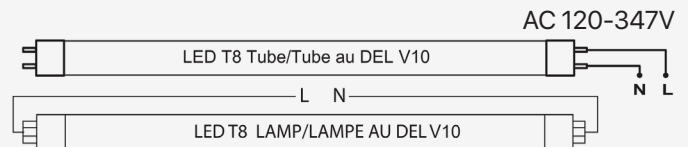

Specifications

Input Voltage	120-347Vac
Input Current	170 mA max
Power	18W
Equivalent Power	30W
Efficiency	122 lm/W
Lumens (Up to)	2200lm
Colour Temperature	4000K (T48T8-18W-40K-V10) 5000K (T48T8-18W-50K-V10)
Beam angle	100°
Tube Type	Type B

Color Rendering Index (CRI)	+80
Total Harmonic Distortion (THD)	27.5%
Operating Temperature	-20 to 40°C
Dimensions	4ft
Build Material	Glass
Environment	Damp Locations
Lifetime	50,000h
Years of Warranty	5 years
Certifications and Compliance	cETLus

Order information

Ordering Code	Model Number	Input Voltage	Power	Lumens	Colour Temperature
T48T8-18W-40K-V10	T48T8-18W-40K-MV-V10	120-347Vac	18W	2200lm	4000K
T48T8-18W-50K-V10	T48T8-18W-50K-MV-V10	120-347Vac	18W	2200lm	5000K