

Certifications



Features & Benefits

| | | | | | | | |
|--|-------------|--|------------------|--|-----------|--|----------------|
| | LED fixture | | Warranty 5 Years | | Power 36W | | Damp locations |
|--|-------------|--|------------------|--|-----------|--|----------------|

Running Man Combo (Metal)

Discover our Running Man Combo, the ultimate surface-mountable, conduit-mounted, and double-sided emergency lighting solution. This running man combo guarantees over 2 hours of uninterrupted lighting.




ELECTRICAL CHARACTERISTICS

| | |
|-----------------------|-------------------------------------|
| Material | Metal |
| Product Colour | Available in: - White - Black |
| Input Voltage | 120-347Vac |
| Input current | 0.325Aac |
| Rated Power (W) | 36W |
| Lumen output (lm) | 2 x 120 lm |
| Colour Temperature | 6500K |
| Beam Spread | 180° Rotation |
| Wire Size of Leads | 18AWG |
| Power after LED | 32W |
| Operating Temperature | 5°C to 30°C |
| Environment | Suitable for damp locations |
| Lifetime | 50 000 hours |
| Warranty | Body: 5 Years, Battery: 1 Year |

CIRCUITRY

| | |
|---|---|
| Lead-Acid Battery: 6V/6Ah | Recharge time: 20 hours |
| 120Vac 50/60Hz | Input Wattage: 3.2W Input current: 0.03A Efficiency: 0.97P |
| 277Vac 50/60Hz | Input Wattage: 3.3W Input current: 0.01A Efficiency: 0.92PF |
| 347Vac 50/60Hz | Input Wattage: 3.6W Input current: 0.01A Efficiency: 0.92PF |
| The battery voltage is negatively correlated to the input wattage | |
| ≥ 30min at 36W | |
| ≥ 60min at 18W | |
| ≥ 90min at 12W | |
| ≥ 120min at 9W | |

PRODUCT DIMENSIONS

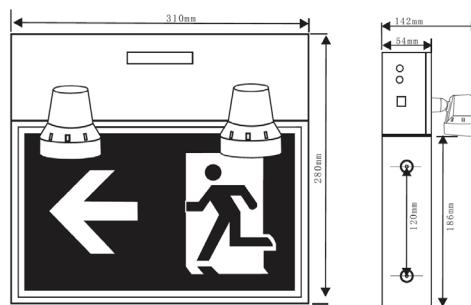

OPTIONAL ACCESSORY



4ft Power Cord
EX-PC4

INCLUDED STENCILS AVAILABLE IN TWO COLOURS:



1 x Running Man with Arrow
(Facing Right)



1 x Running Man with Arrow
(Facing Left)



1 x Running Man
without Arrow



EX-RM2-EM1-2-5W-V1



EX-RM2-EM1-2-5W-BK-V1

| | |
|---------------|----------|
| Date: | Project: |
| Prepared for: | Type: |
| Comments: | |

ORDERING INFORMATION

| Series | Battery duration | Rated Power | Lumen Output | Input Voltage | SKU |
|---------------------------|------------------|-------------|--------------|---------------|---|
| Running man Combo (Metal) | +2Hours | 36W | 2x160lm | 120-347Vac | EX-RM2-EM1-2-5W-V1 EX-RM2-EM1-2-5W-BK-V1 |

| SKU | Volt/Watt | 0.5H | 1H | 1.5H | 2H | 4H | Voltage/Capacity |
|-----------------------|-----------|------|----|------|----|----|------------------|
| EX-RM2-EM1-2-5W-BK-V1 | 6V - 36W | 36 | 18 | 13 | 9 | 4 | 6V-6Ah |
| EX-RM2-EM1-2-5W-V1 | | | | | | | |