


Ceiling Light Installation Instructions

⚠ WARNING


1. Only a qualified electrician should install this fixture. All electrical and grounding connections must comply with the National Electrical Code, Canadian Electrical Code, and all applicable local codes.
2. The supply conductor must be rated for a minimum of 90°C.
3. Switch off the main power supply at the breaker before wiring.
4. This fixture is rated for damp locations. Do not expose it to direct water. For outdoor or semi-exposed installations, apply waterproof silicone to seal around the trim and ceiling.
5. This fixture operates in ambient temperatures from -20°C to 40°C. Use outside this range will reduce its lifespan.
6. Do not stare directly at the LED light source.
7. Inspect the fixture for shipping damage before installation. Contact Arani immediately if damage is found.
8. Confirm all accessories are present and read the full installation instructions before beginning.
9. Wear gloves during installation to avoid injury.
10. In the event of smoke or sparks from the wiring, cut power immediately at the breaker and contact a qualified electrician.
11. Clean the fixture regularly to maintain performance and longevity.




Ceiling Light

CL07-8W-12W-VAR-WH-V5
CL12-20W-24W-VAR-WH-V5


Part	Description	Qty
A	Slim flush mount light	1
B	Mounting screws	4
C	Terminal	1
D	Mounting plate	1

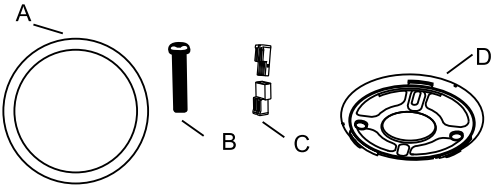


Flush Mount



1. Prior to installation, install mounting plate into the electrical outlet box with mounting screws. Drive screws completely to the end of the junction box



2. Connect supply wires to wires on fixture with wire nuts or push wires into Quick Connector. Connect white to white, black to black.



Fixture

3. Complete the installation by turning the fixture a quarter turn and pushing it into the mounting plate.

