

Ceiling Light


CL07-8W-12W-VAR-WH-V5



Date:	Project:
Prepared for:	Type:
Comments:	



Introducing our new LED Ceiling Lights. Ideal for general lighting in kitchens, hallways, bedrooms and commercial spaces. This product features selectable color temperatures, selectable power settings, and high CRI, offering unmatched flexibility and visual comfort. With cETLus certification and a damp location rating, it delivers dependable performance.

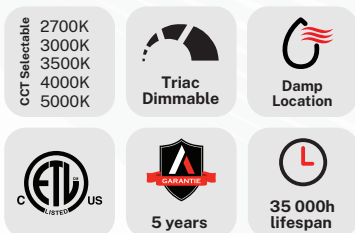

Specifications

Input Voltage	120Vac
Input Current	0.19 A
Power	12W / 10W / 8W (7")
Color Temperature	2700K/3000K/3500K/4000K/5000K
Lumens	1000lm / 900lm / 800lm (7")
Efficacy	80 lm/W (7")
Color Rendering Index	≥90
Dimming Type	Triac
Power Factor	>0.8

Surge Protection (L-N / L/N-PE)	1kV / 1kV
Product Color	White
Material of Body	Plastic
Material of Lens	Polycarbonate
Beam Angle	110°
Operating Temperature	-20°C to 40°C
Environment	Damp
Years of warranty	5 years
Lifetime	35,000 hours
Certifications	cETLus

Order information

Ordering Code	Input Voltage	Power	Lumens	CCT Selectable
CL07-8W-12W-VAR-WH-V5	120Vac	12W / 10W / 8W	1000lm / 900lm / 800lm	2700K/3000K/3500K/4000K/5000K

Ceiling Light





CL07-8W-12W-VAR-WH-V5

Dimensions

Ordering Code	Diameter	Height
CL07-8W-12W-VAR-WH-V5	Ø7" (180mm)	11/16" (17mm)

Photometrics

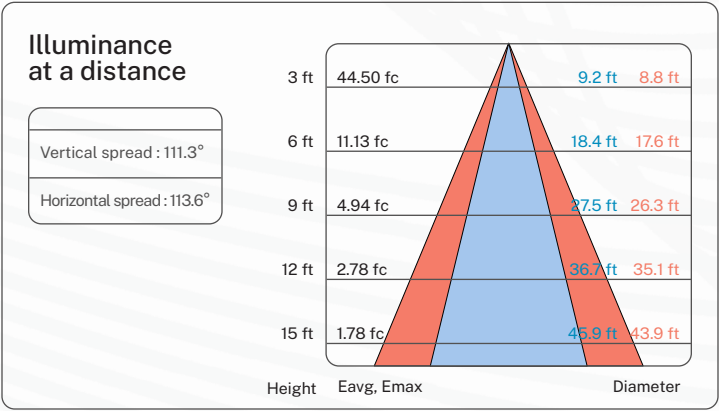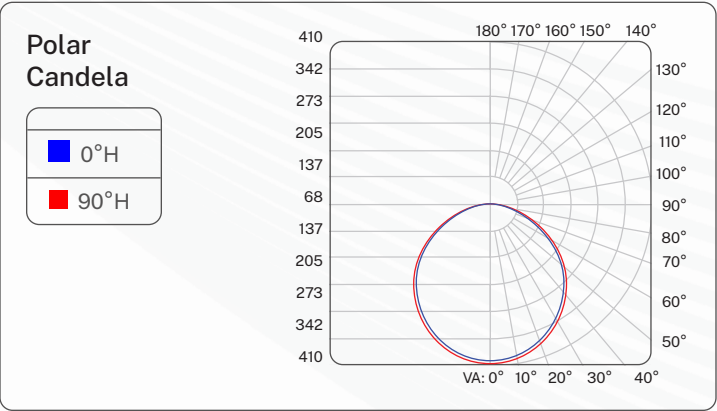

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	312.0	27.1 %	27.1 %
0-40	512.0	44.5 %	44.5 %
0-60	907.2	78.9 %	78.9 %
60-90	236.0	20.5 %	20.5 %
70-100	95.1	8.3 %	8.3 %
90-120	1.8	0.2 %	0.2 %
0-90	1,143.2	99.4 %	99.4 %
90-180	6.3	0.6 %	0.6 %
0-180	1,149.5	100 %	100 %

